


# Ribbon T

---

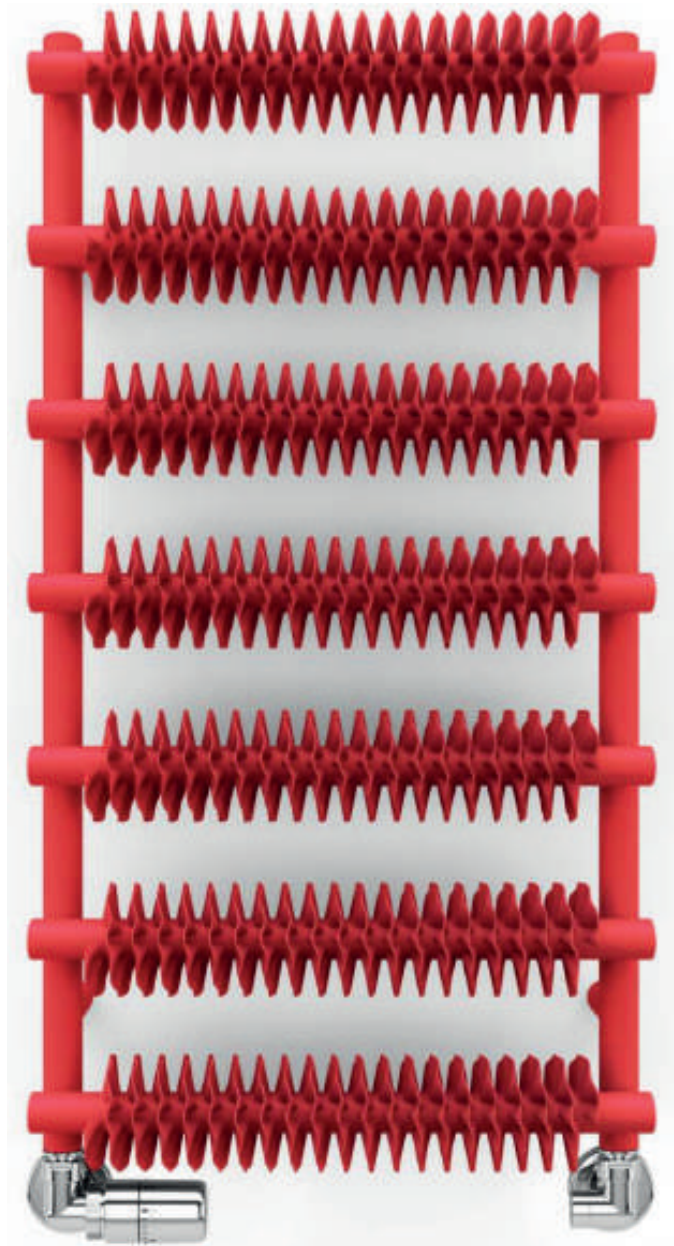


RAL. 3020


## Anschlussstypen:



Elektroheizkörper:



## Verfügbare Größen:

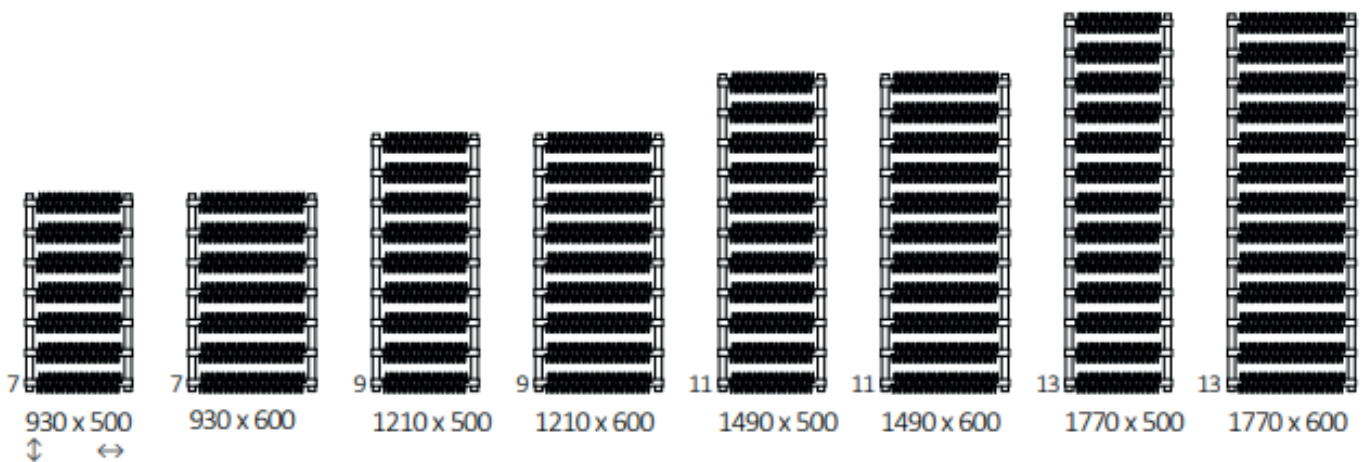


## Technische Daten:

Betriebsdruck: 1000 kPa

Maximale Betriebstemperatur: 95°C

A ↑ [mm]	B ↔ [mm]	C2 [mm]	7/65/20°C [W]	55/45/20°C [W]	⊗ [W]	D [mm]	E [mm]	F [mm]	H [dm <sup>2</sup> ]	⚖ [kg]
930	500	460	625	332	600	460	700	115	3,54	21,04
930	600	560	766	409	800	560	700	115	4,02	24,73
1210	500	460	803	424	800	460	980	115	4,57	27,11
1210	600	560	968	510	1000	560	980	115	5,19	31,85
1490	500	460	981	515	1000	460	1260	115	5,61	33,17
1490	600	560	1171	608	1200	560	1260	115	6,36	38,96
1770	500	460	1160	605	1200	460	1540	115	6,64	39,23
1770	600	560	1373	707	1500	560	1540	115	7,53	46,07

Technische Zeichnung:

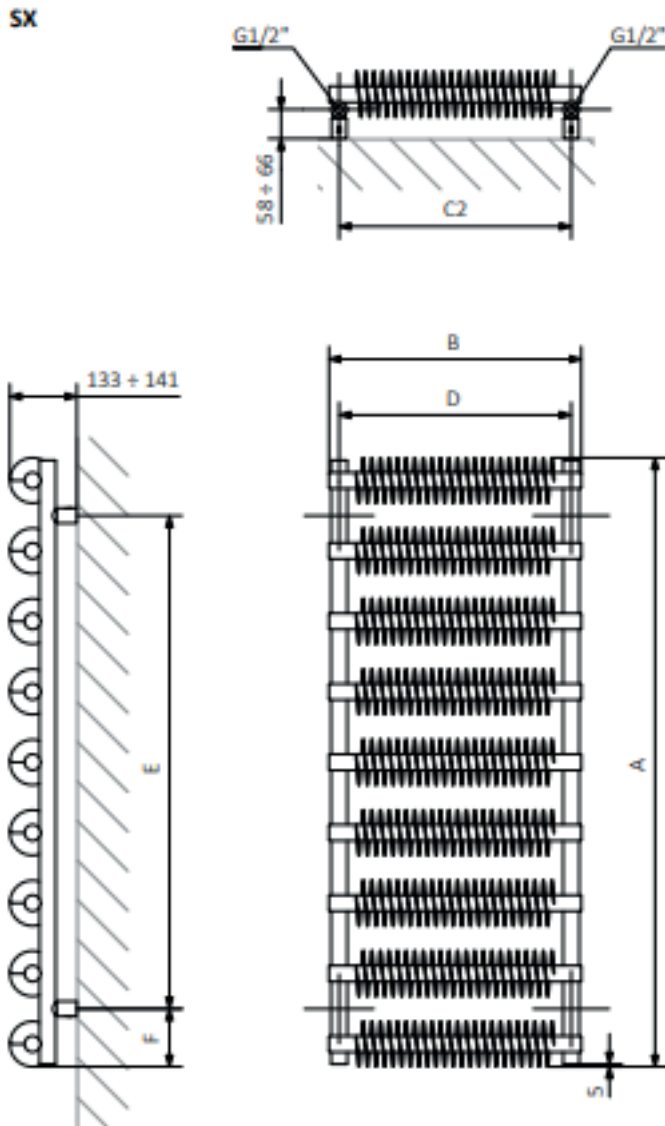

A - Höhe B - Breite C1-C5 - Anschlussabstand D - horizontaler Wandhalterungsabstand E - Vertikaler Wandhalterungsabstand F - Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Kollektor:

Rohr:

