

# Lima




## Anschlusstypen

---

### Warmwasserbetrieb




### Mischbetrieb

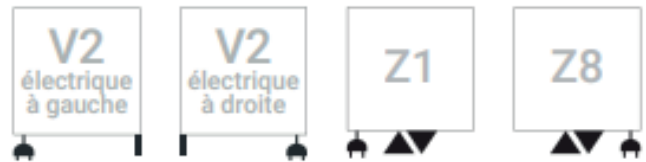

## Verfügbare Größen

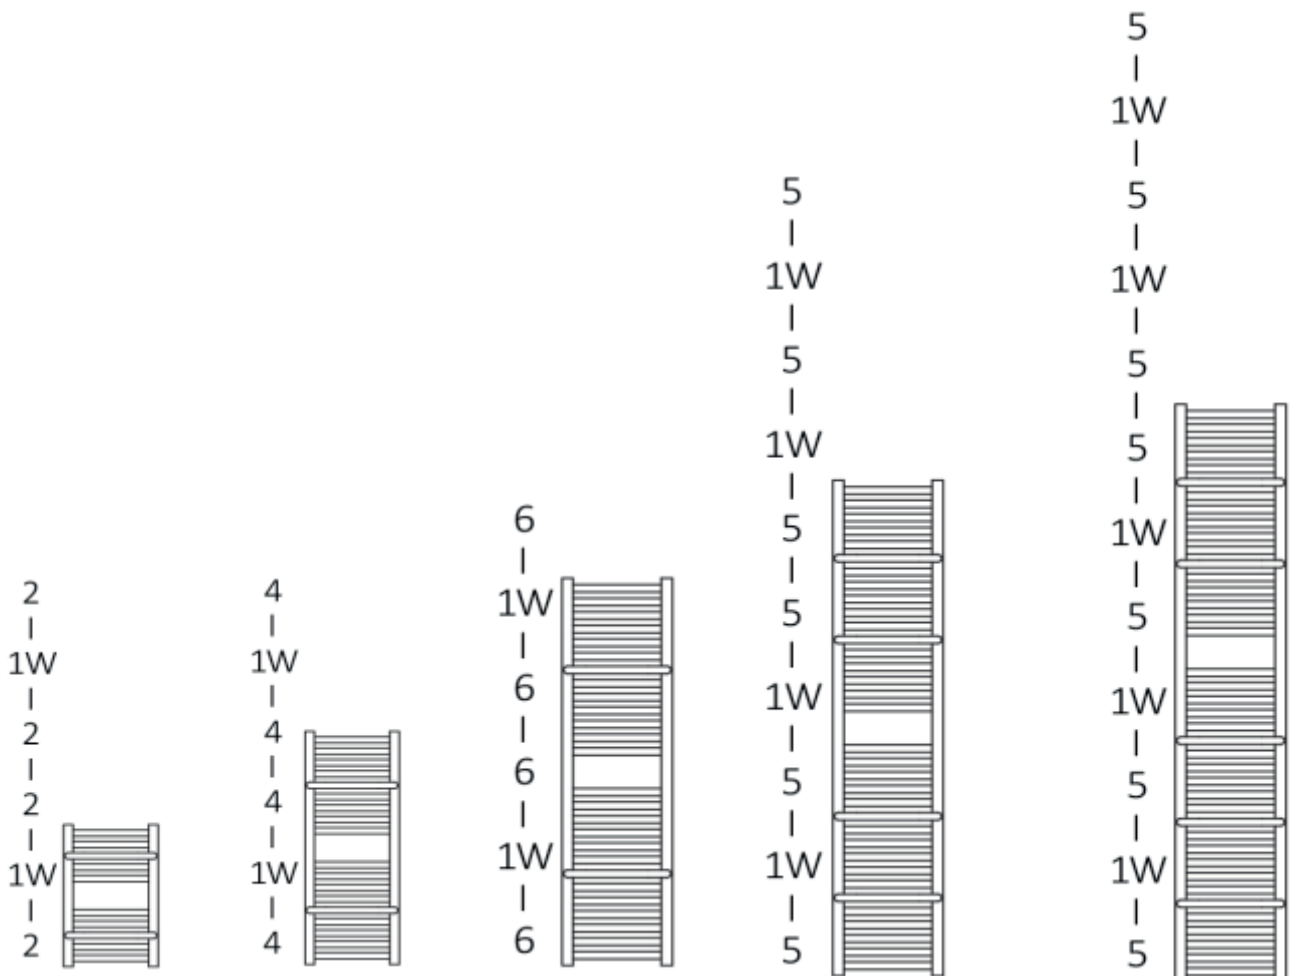


---






## Technische Daten


Betriebsdruck: 1000 kPa

Maximale Betriebstemperatur: 95°C

A ↑ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm²]	 [kg]
Pulverlack										
500	300	50	144	79	100	270	320	90	1,50	3,06
820	300	50	244	132	300	270	640	90	2,53	5,14
1140	300	50	345	185	400	270	960	90	3,57	7,22
1460	300	50	449	240	500	270	1280	90	4,66	9,42
1700	300	50	527	280	500	270	1520	90	5,47	11,04

A ↑ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm²]	 [kg]
Galvanische Oberfläche										
500	300	50	101	51	100	270	320	90	1,50	2,94
820	300	50	171	87	200	270	640	90	2,53	4,94
1140	300	50	242	123	300	270	960	90	3,57	6,94
1460	300	50	314	160	300	270	1280	90	4,66	9,06
1700	300	50	369	188	400	270	1520	90	5,47	10,62

## Technische Zeichnung:

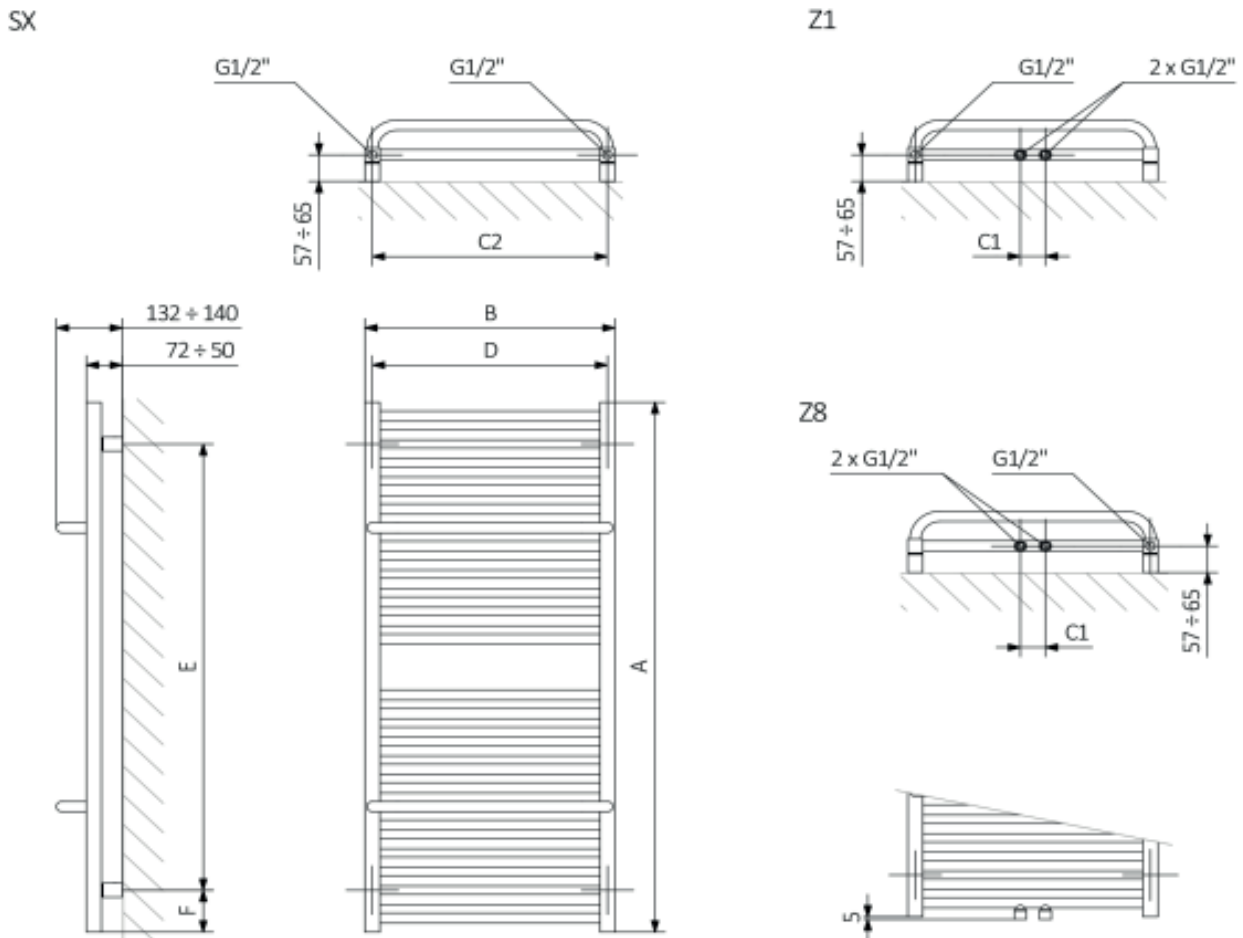

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

**Kollektor:**

**Rohr:**

