

Lima




Anschlusstypen

Elektrobetrieb





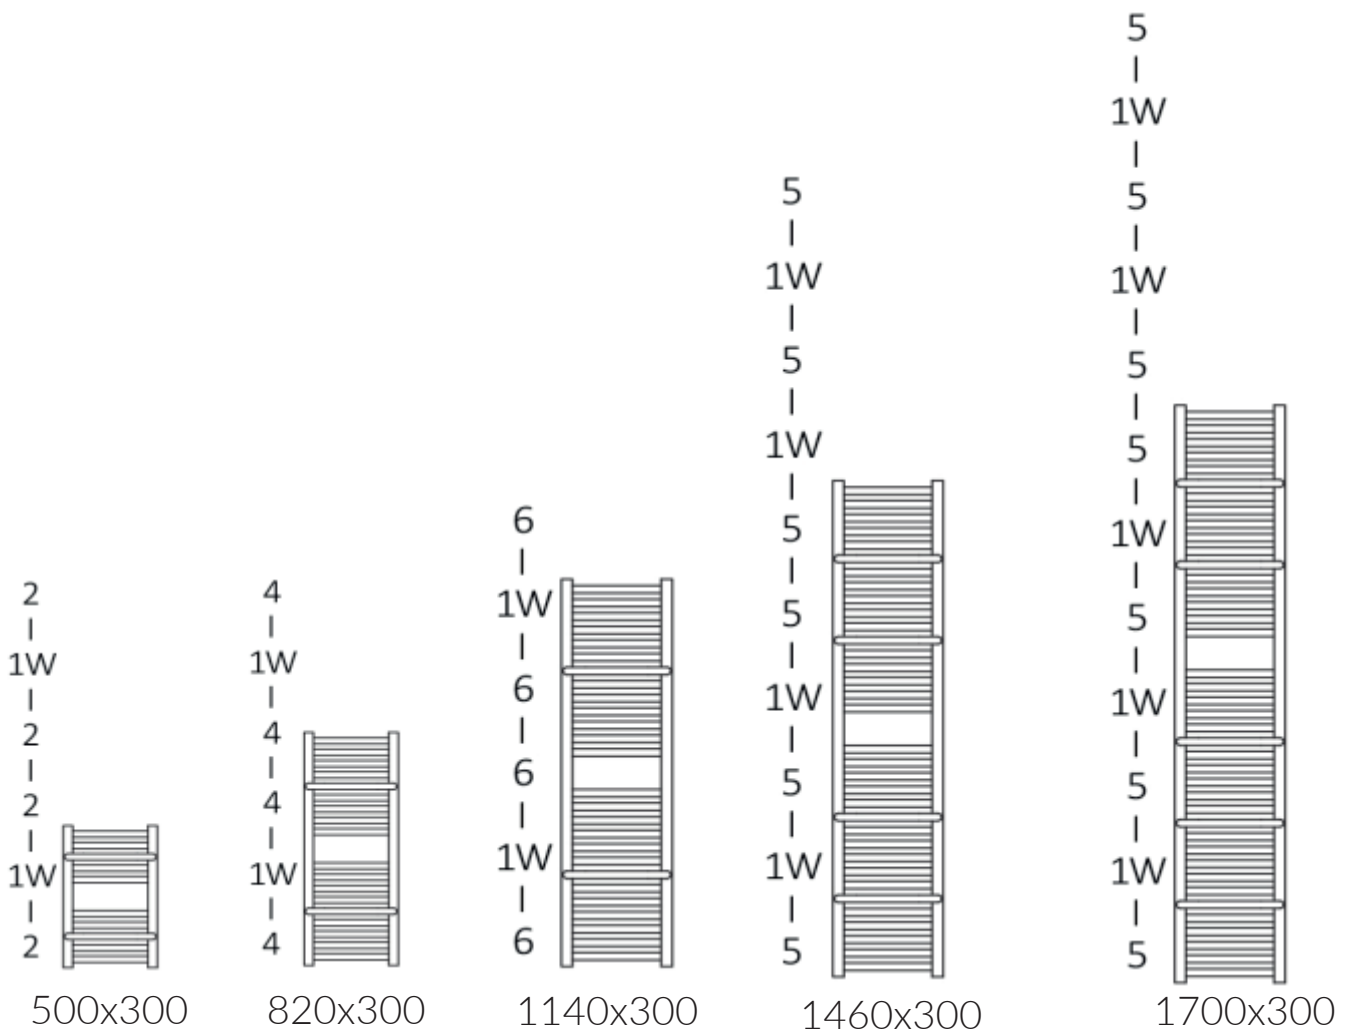



Verfügbare Größen



Technische Daten


Betriebsdruck: 1000 kPa Maximale Betriebstemperatur: 95°C

A ↓ [mm] Pulverlack	B ↔ [mm]	C1 [mm]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
500	300	50	100	270	320	90	1.50	3.06
820	300	50	300	270	640	90	2.53	5.14
1140	300	50	400	270	960	90	3.57	7.22
1460	300	50	500	270	1280	90	4.66	9.42
1700	300	50	500	270	1520	90	5.47	11.04

A ↓ [mm]	B ↔ [mm]	C1 [mm]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
500	300	50	100	270	320	90	1.50	2.94
820	300	50	200	270	640	90	2.53	4.94
1140	300	50	300	270	960	90	3.57	6.94
1460	300	50	300	270	1280	90	4.66	9.06
1700	300	50	400	270	1520	90	5.47	10.62


Galvanische Oberfläche

Technische Zeichnung:

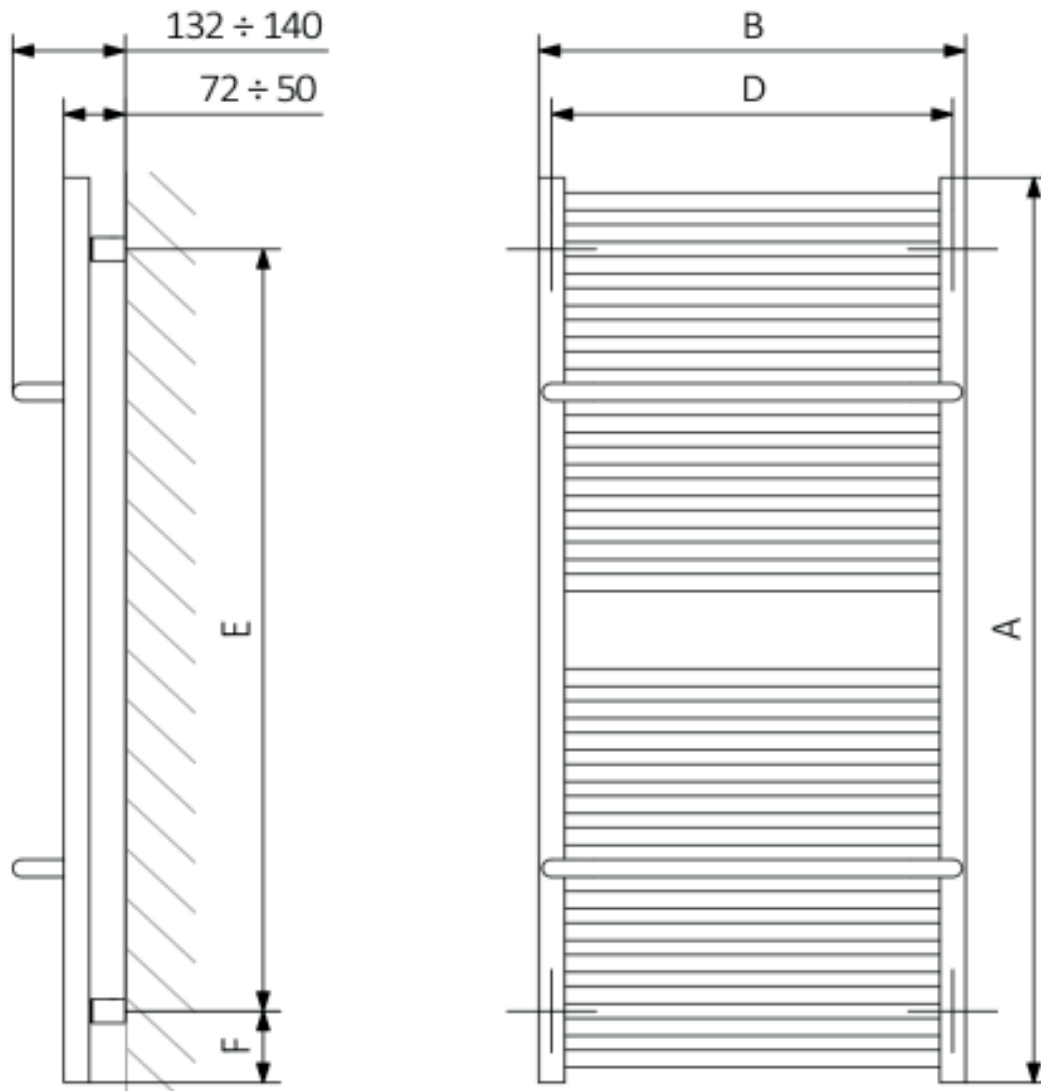

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand
F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Kollektor:



Rohr:

