

Mantis



Mantis 1260↑ × 540↔ E8
Farbe: RAL 5018

Heizpatrone KTX3, Chrom

Mantis

Anschlussstypen


Warmwasserbetrieb




Elektrobetrieb



Mischbetrieb

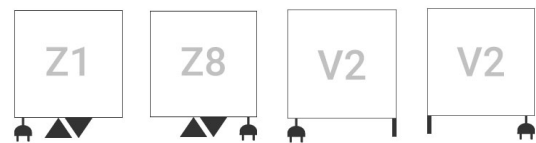

Verfügbare Größen

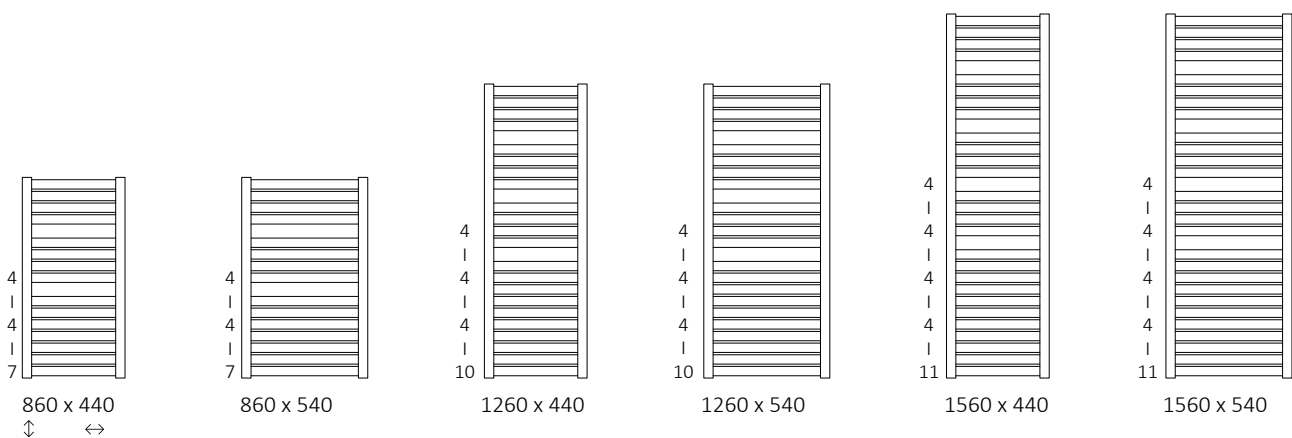

Technische Daten


Betriebsdruck: 800 kPa

Maximale Betriebstemperatur: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	55/20°C [W]	55/42°C [W]	 [W]	D [mm]	E [mm]	F [mm]	H [dm ²]	 [kg]	Artikelnummer <small>Konfiguration: 123456789</small>
860	440	50	400	351	185	400	400	680	90	3,03	9,34	WGMAT086044
860	540	50	500	423	223	400	500	680	90	3,41	11,06	WGMAT086054
1260	440	50	400	502	266	600	400	1080	90	4,44	13,86	WGMAT126044
1260	540	50	500	605	319	600	500	1080	90	5,00	16,31	WGMAT126054
1560	440	50	400	615	326	600	400	1380	90	5,47	17,04	WGMAT156044
1560	540	50	500	742	391	800	500	1380	90	6,17	20,06	WGMAT156054


Mantis

Technische Zeichnung

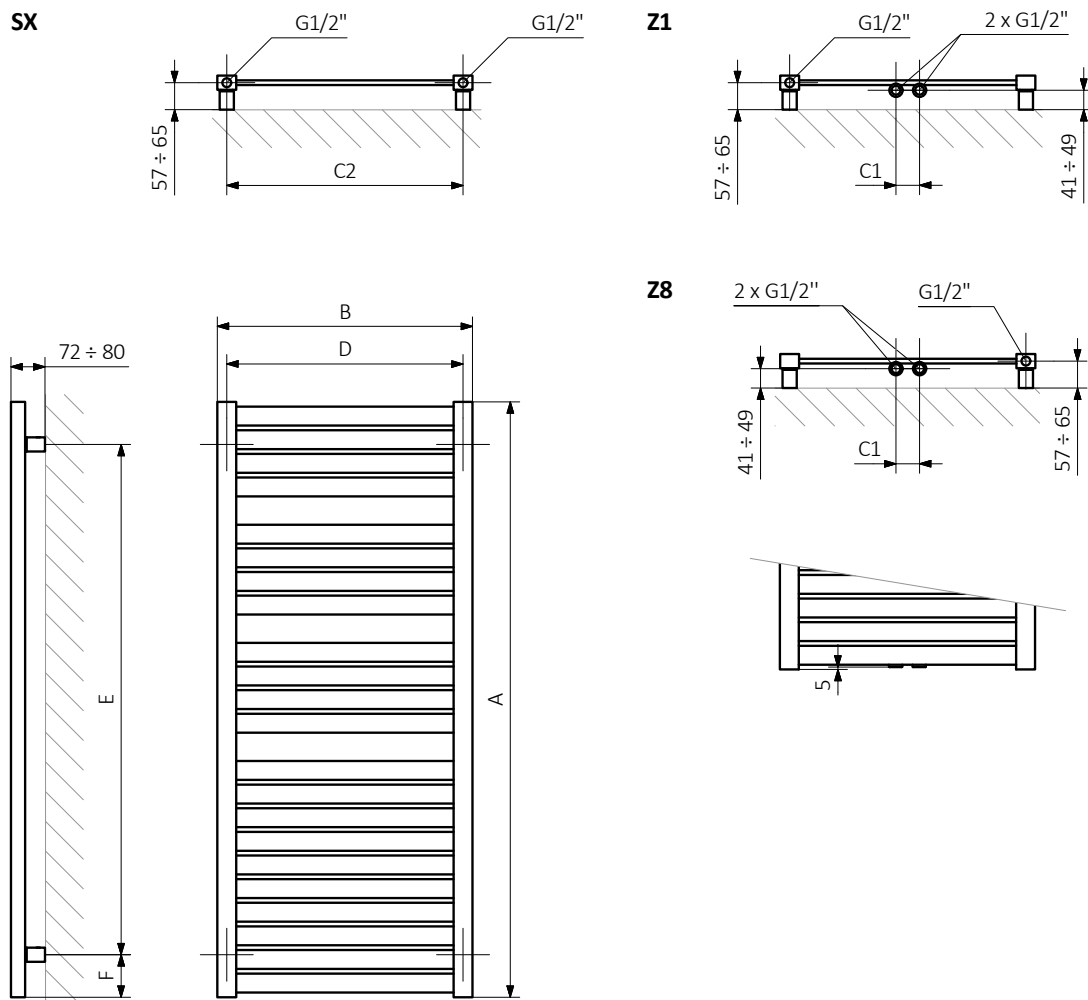

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Kollektor:



Rohr:

