


Pajak




Standard Anschlusstypen:




Verfügbare Größen:



1000 x 431
 ↓ ↔




1000 x 531




1000 x 631




1400 x 431

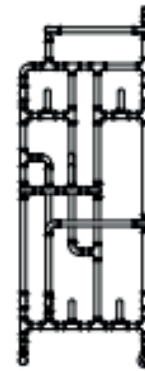


1400 x 531

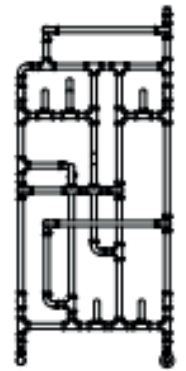


1400 x 631

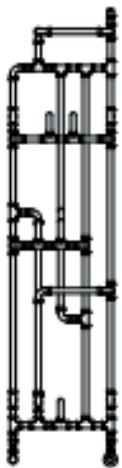

1800 x 431
 ↓ ↔

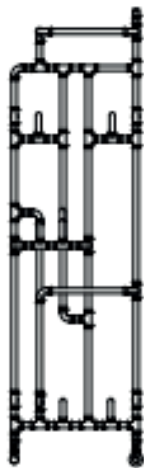

1800 x 531

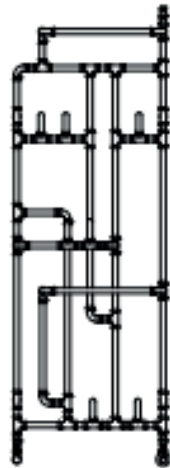





1800 x 631

Technische Daten:

Betriebsdruck: 1000 kPa


Maximale Betriebstemperatur: 95°C

A \updownarrow [mm]	B \leftrightarrow [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	H [dm³]	 [kg]
1000	431	196	400	300	165	300	400	505	196,5	2,13	9,19
1000	531	200	500	339	184	400	500	505	196,5	2,20	9,57
1000	631	312	600	380	205	400	600	505	196,5	2,46	10,31
1400	431	196	400	368	199	400	400	852	196,5	2,70	10,28
1400	531	200	500	424	227	400	500	852	196,5	2,77	10,68
1400	631	312	600	480	256	600	600	852	196,5	3,02	11,40
1800	431	196	400	437	234	400	400	1162	196,5	3,26	11,39
1800	531	200	500	510	272	600	500	1162	196,5	3,32	11,79
1800	631	312	600	582	310	600	600	1162	196,5	3,58	12,53




A \updownarrow [mm]	B \leftrightarrow [mm]	 [W]	D [mm]	E [mm]	F [mm]	H [dm³]	 [kg]
923	431	300	400	505	196,5	2,07	10,56
923	531	400	500	505	196,5	2,14	10,98
923	631	400	600	505	196,5	2,40	11,93
1323	431	400	400	852	196,5	2,64	12,10
1323	531	400	500	852	196,5	2,71	12,57
1323	631	600	600	852	196,5	2,96	13,48
1723	431	400	400	1162	196,5	3,20	13,66
1723	531	600	500	1162	196,5	3,26	14,12
1723	631	600	600	1162	196,5	3,52	15,07

Technische Zeichnung:

SX

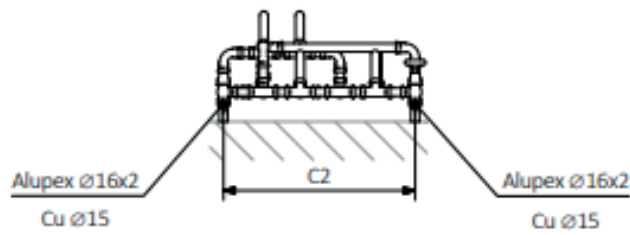

YX

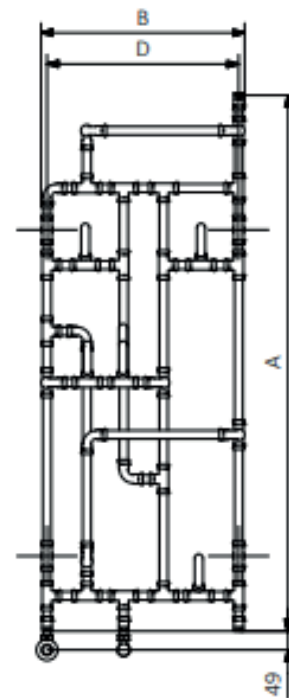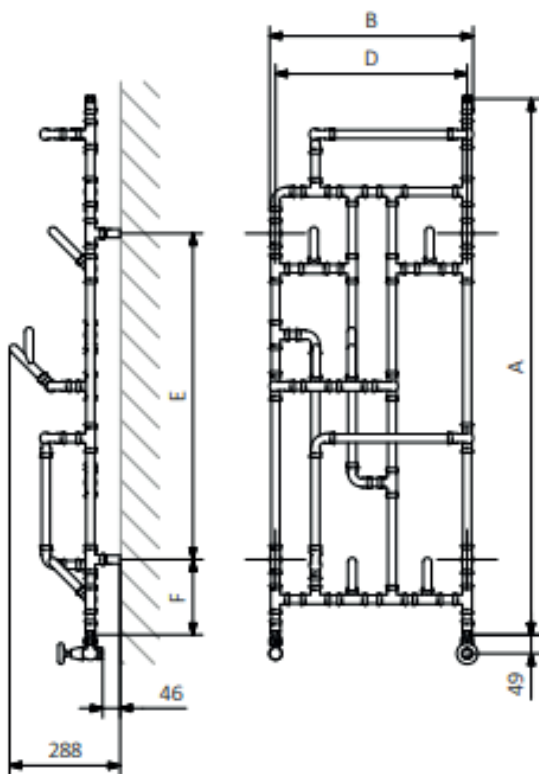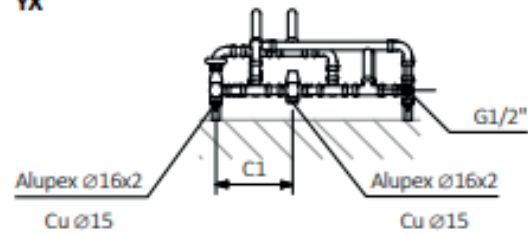

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Rohr:

