


Simple



Farben
im Preis

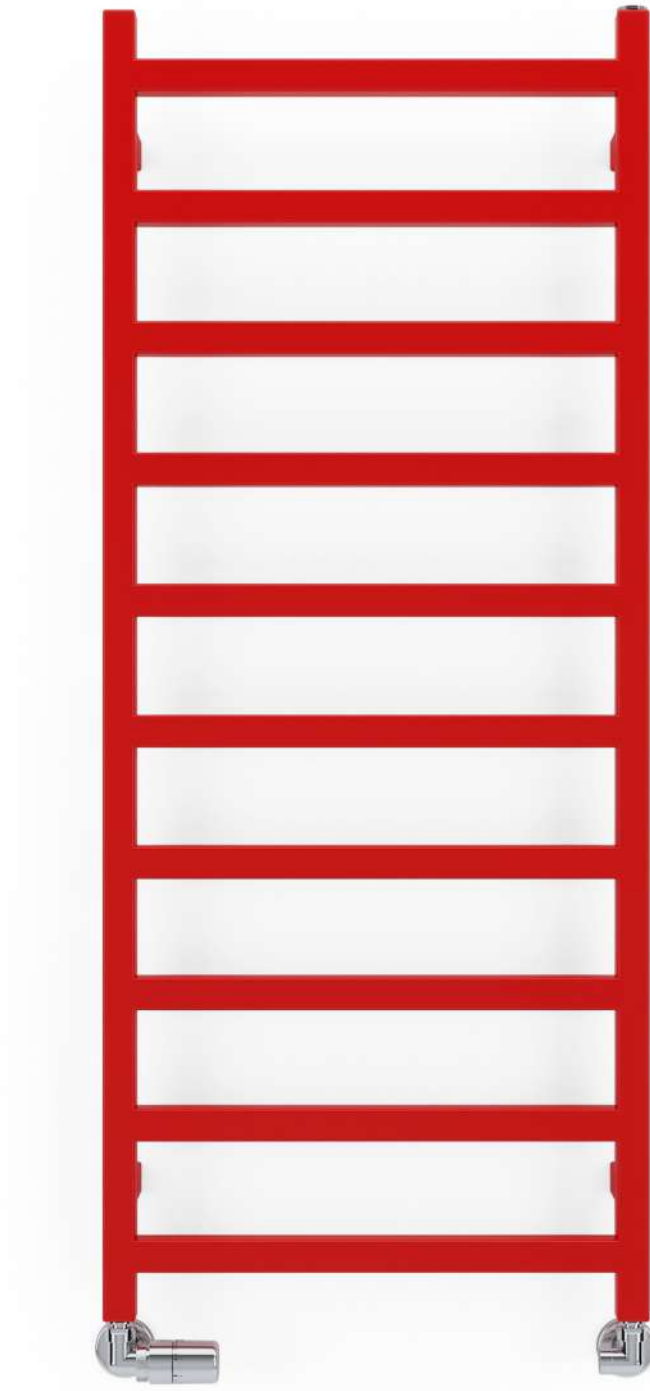


Simple
1200x500
Farbe : RAL 3020

Simple

Standard Anschlusstypen:

A \updownarrow 480÷1920:



Verfügbare Größen:








Simple

Technische Daten:


Betriebsdruck: 1000 kPa

Maximale Betriebstemperatur: 95°C

A 	B 	C1	C2	C3	C4	75/65/20°C	55/45/20°C		D	E	F			Artikelnummer
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[W]	[W]	[W]	[mm]	[mm]	[mm]	[dm ²]	[kg]	<small>Konfigurationscode s. 8</small>
480	500	50	470	173	100	200	470	240	120	1,96	3,84	WGSIM048050		
600	500	50	470	217	123	200	470	360	120	2,45	4,74	WGSIM060050		
720	500	50	470	262	145	300	470	480	120	2,94	5,64	WGSIM072050		
840	500	50	470	306	167	300	470	600	120	3,43	6,54	WGSIM084050		
960	500	50	470	351	189	400	470	720	120	3,92	7,43	WGSIM096050		
1080	500	50	470	396	211	400	470	840	120	4,41	8,33	WGSIM108050		
1200	500	50	470	440	234	400	470	960	120	4,90	9,23	WGSIM120050		
1440	500	50	470	529	271	600	470	1200	120	5,89	11,03	WGSIM144050		
1680	500	50	470	618	308	600	470	1440	120	6,87	12,83	WGSIM168050		
1920	500	50	470	707	343	800	470	1680	120	7,85	14,63	WGSIM192050		

Simple

Technische Zeichnung

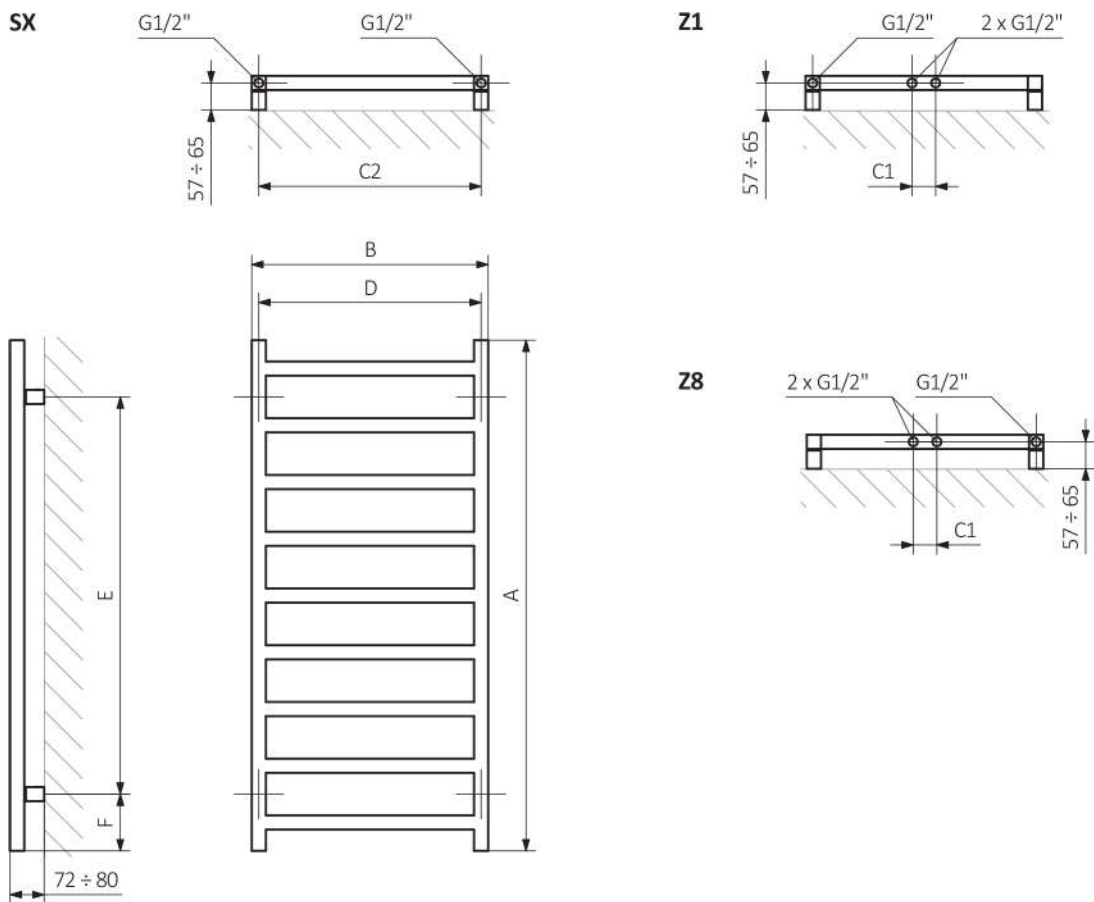

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand
F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Rohr: