


# Vivo




Farben  
im Preis

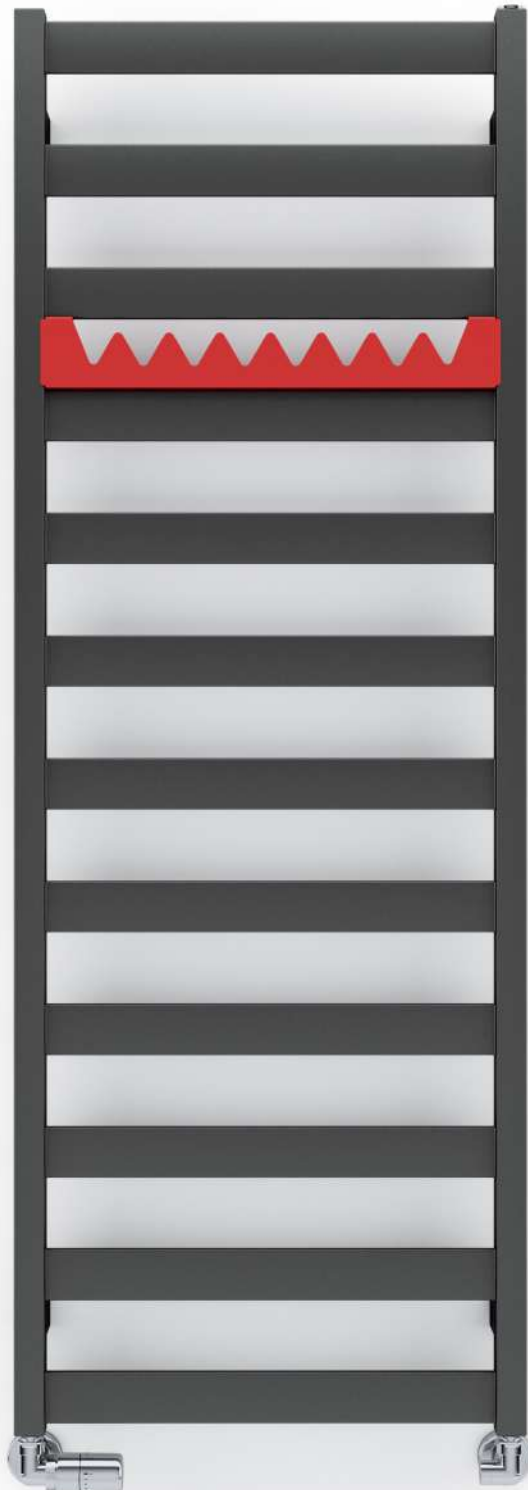


Vivo  
1390x500  
Farbe : RAL 3020

# Vivo

## Standard Anschlusstypen:



## Verfügbare Größen:

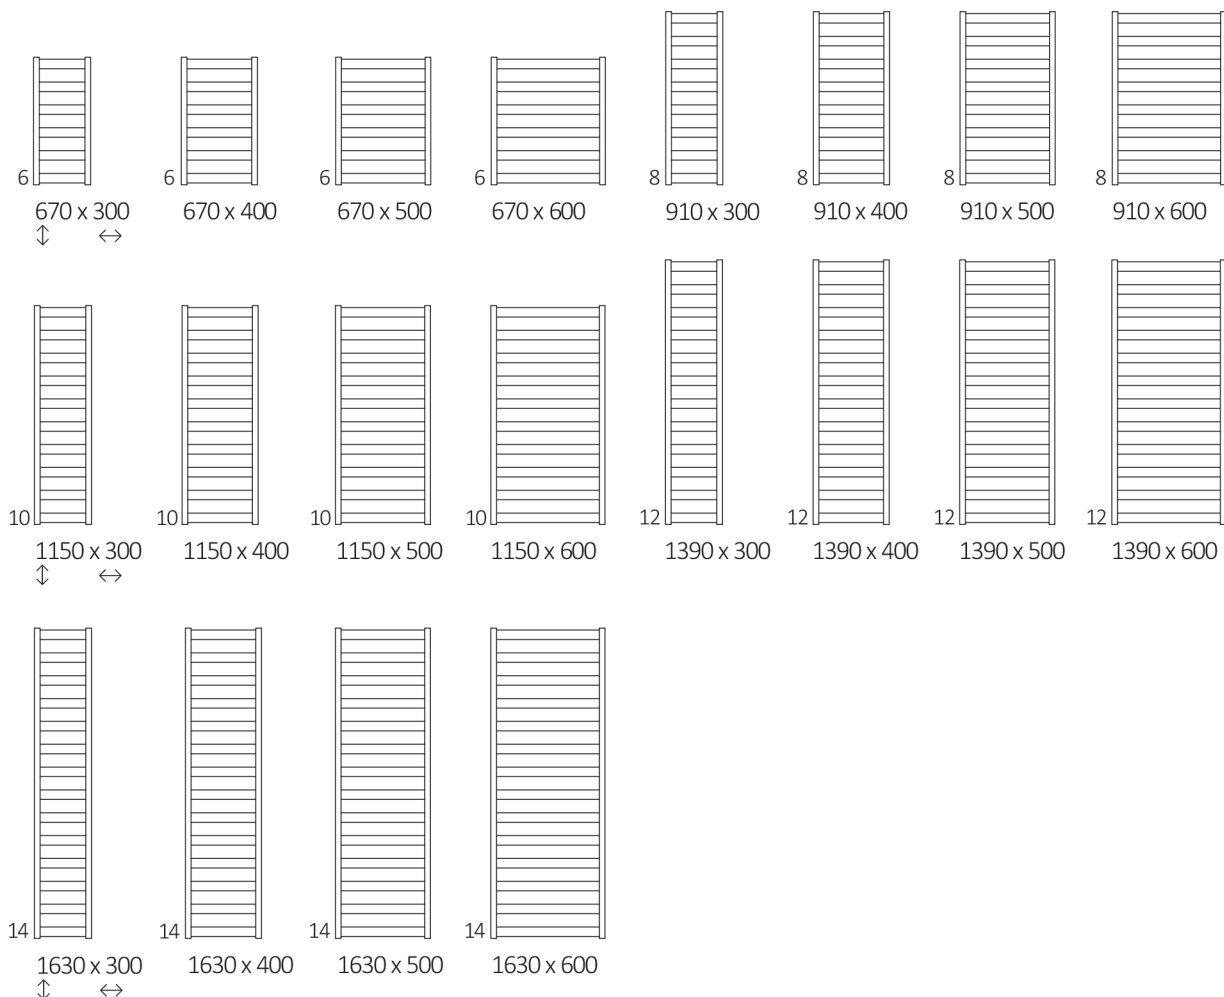

# Vivo

## Technische Daten:


Betriebsdruck: 600 kPa

Maximale Betriebstemperatur: 95°C

A ↓ [mm]	B ⇄ [mm]	C1 [mm]	C2 [mm]	C3 [mm]	C4 [mm]	75/65/20°C [W]	55/45/20°C [W]	☺ [W]	D [mm]	E [mm]	F [mm]	H [dm²]	📖 [kg]	Artikelnummer <small>Konfigurations code s. 8</small>
670	300	50	270	185	100	200	270	490	90	1,44	4,28	WGVOV067030		
670	400	50	370	230	124	200	370	490	90	1,63	5,17	WGVOV067040		
670	500	50	470	275	148	300	470	490	90	1,83	6,04	WGVOV067050		
670	600	50	570	320	172	300	570	490	90	2,03	6,93	WGVOV067060		
910	300	50	270	240	130	200	270	730	90	1,94	5,56	WGVOV091030		
910	400	50	370	295	159	300	370	730	90	2,21	6,72	WGVOV091040		
910	500	50	470	350	189	400	470	730	90	2,47	7,86	WGVOV091050		
910	600	50	570	405	218	400	570	730	90	2,73	9,01	WGVOV091060		
1150	300	50	270	300	162	300	270	970	90	2,45	6,85	WGVOV115030		
1150	400	50	370	366	197	400	370	970	90	2,78	8,27	WGVOV115040		
1150	500	50	470	433	233	400	470	970	90	3,11	9,68	WGVOV115050		
1150	600	50	570	501	269	500	570	970	90	3,44	11,10	WGVOV115060		
1390	300	50	270	356	192	400	270	1210	90	2,96	8,13	WGVOV139030		
1390	400	50	370	434	234	400	370	1210	90	3,35	9,81	WGVOV139040		
1390	500	50	470	512	275	500	470	1210	90	3,75	11,50	WGVOV139050		
1390	600	50	570	590	316	600	570	1210	90	4,14	13,19	WGVOV139060		
1630	300	50	270	414	223	400	270	1450	90	3,46	9,40	WGVOV163030		
1630	400	50	370	503	270	500	370	1450	90	3,92	11,37	WGVOV163040		
1630	500	50	470	592	318	600	470	1450	90	4,38	13,32	WGVOV163050		
1630	600	50	570	681	365	800	570	1450	90	4,84	15,29	WGVOV163060		

# Vivo

## Technische Zeichnung

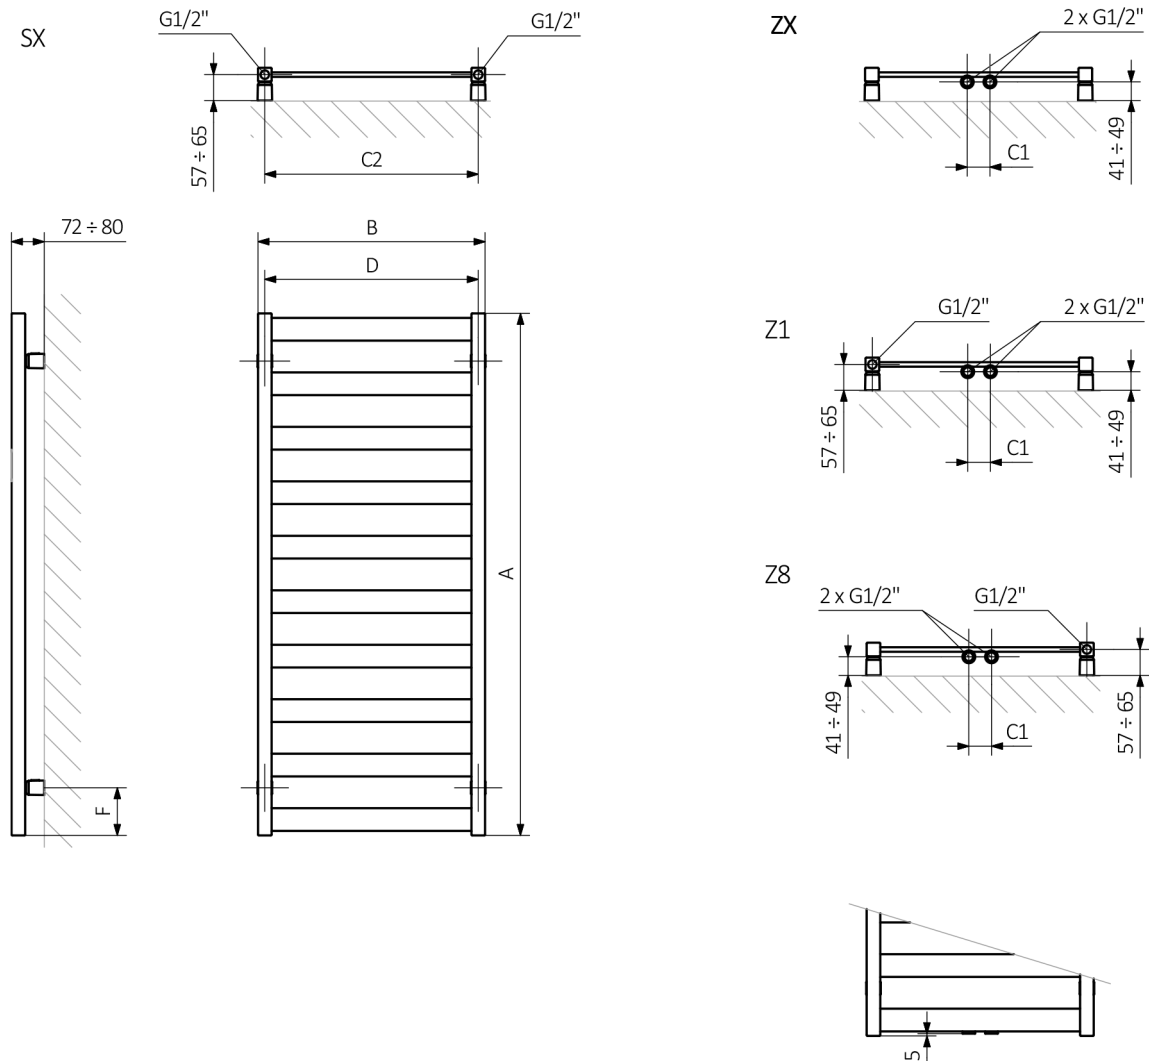

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

### Rohr:

