


Verchromter Mike 430 mischbetrieb








Verchromter Mike 430 mischbetrieb

Anschlussarten:

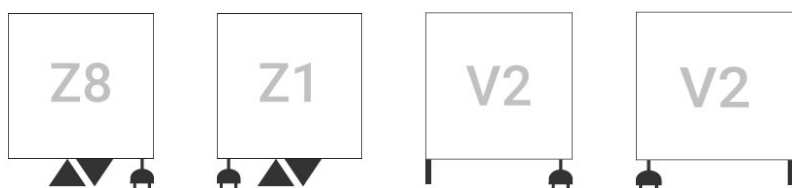

Verfügbare Abmessungen:

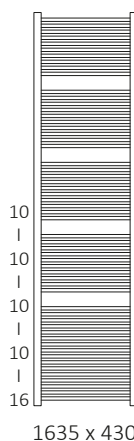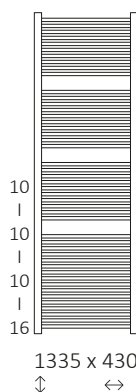


Technische Daten

Arbeitsdruck: 1000kPa

maximale Arbeitstemperatur: 95°C


A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	Leistung [W]	D [mm]	E [mm]	F [mm]	Kapazität [dm³]	Gewicht [kg]
Epoxidfarbe											
435	430	50	400	203	106	200	400	255	90	1,25	3,62
735	430	50	400	337	176	400	400	555	90	2,07	5,92
1035	430	50	400	466	245	400	400	855	90	2,89	8,21
1335	430	50	400	593	312	600	400	1155	90	3,71	10,51
1635	430	50	400	716	377	800	400	1455	90	4,53	12,81

Technische Zeichnung

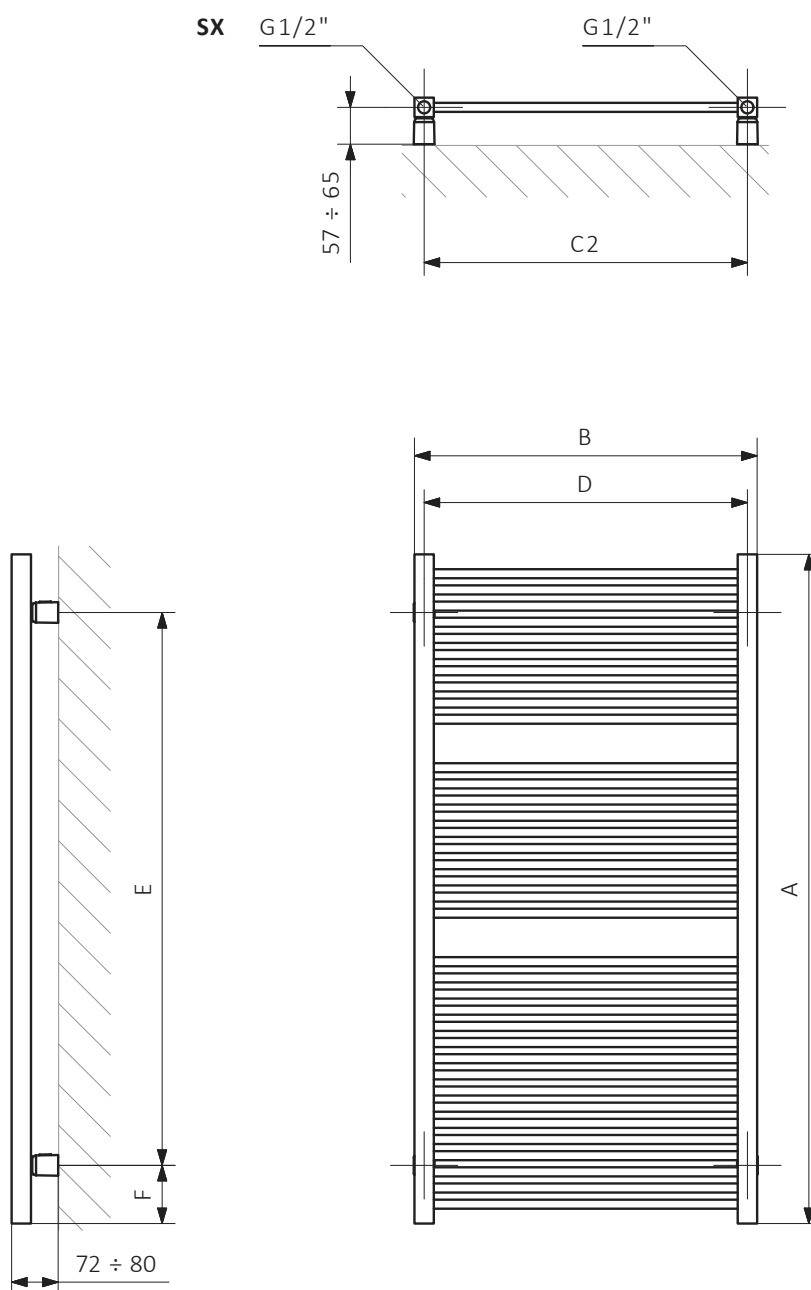

A – Höhe B – Breite C1-C5 – Abstand zwischen den Anschlüssen D – horizontaler Abstand zwischen den Befestigungen E – vertikaler Abstand zwischen den Geräten
F – Abstand zwischen der unteren Achse der Befestigungen und der Unterkante des Kollektors

Kollektor:



Rohr:

