



Verchromter Mike 530 mischbetrieb

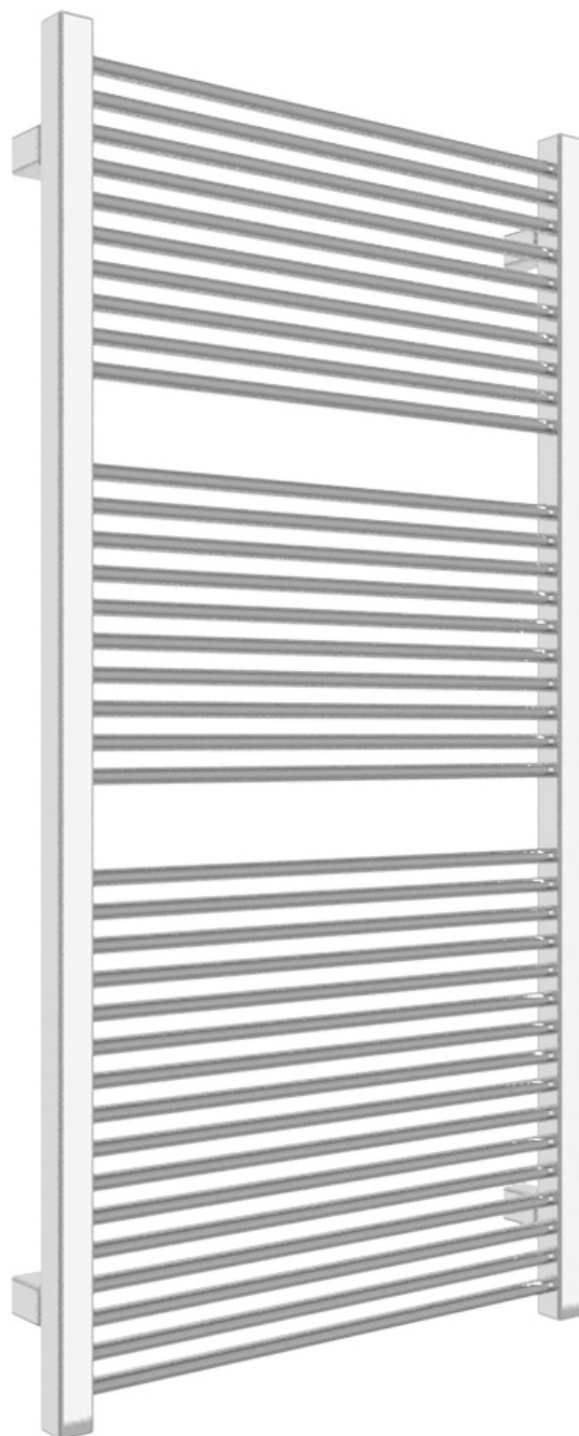


Verchromter Mike 530 mischbetrieb


Anschlusstypen:

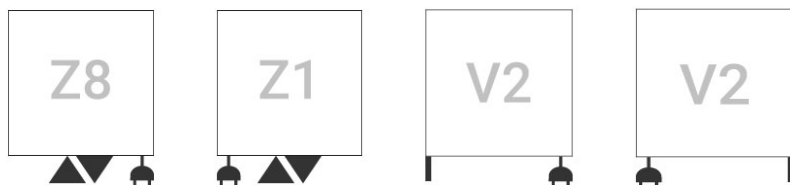


Verfügbare Abmessungen:




435 x 530




735 x 530



1035 x 530



1335 x 530

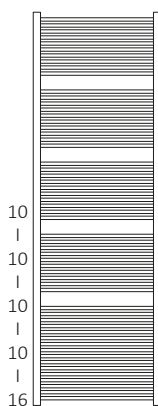

1635 x 530


Technische Daten

Arbeitsdruck: 1000kPa

maximale Arbeitstemperatur: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	Leistung [W]	D [mm]	E [mm]	F [mm]	Kapazität [dm³]	Gewicht [kg]
Peinture epoxy											
435	530	50	500	245	128	300	500	255	90	1,41	4,28
735	530	50	500	406	213	400	500	555	90	2,34	6,99
1035	530	50	500	563	295	600	500	855	90	3,26	9,69
1335	530	50	500	715	376	800	500	1155	90	4,19	12,40
1635	530	50	500	864	454	800	500	1455	90	5,11	15,11

Technische Zeichnung

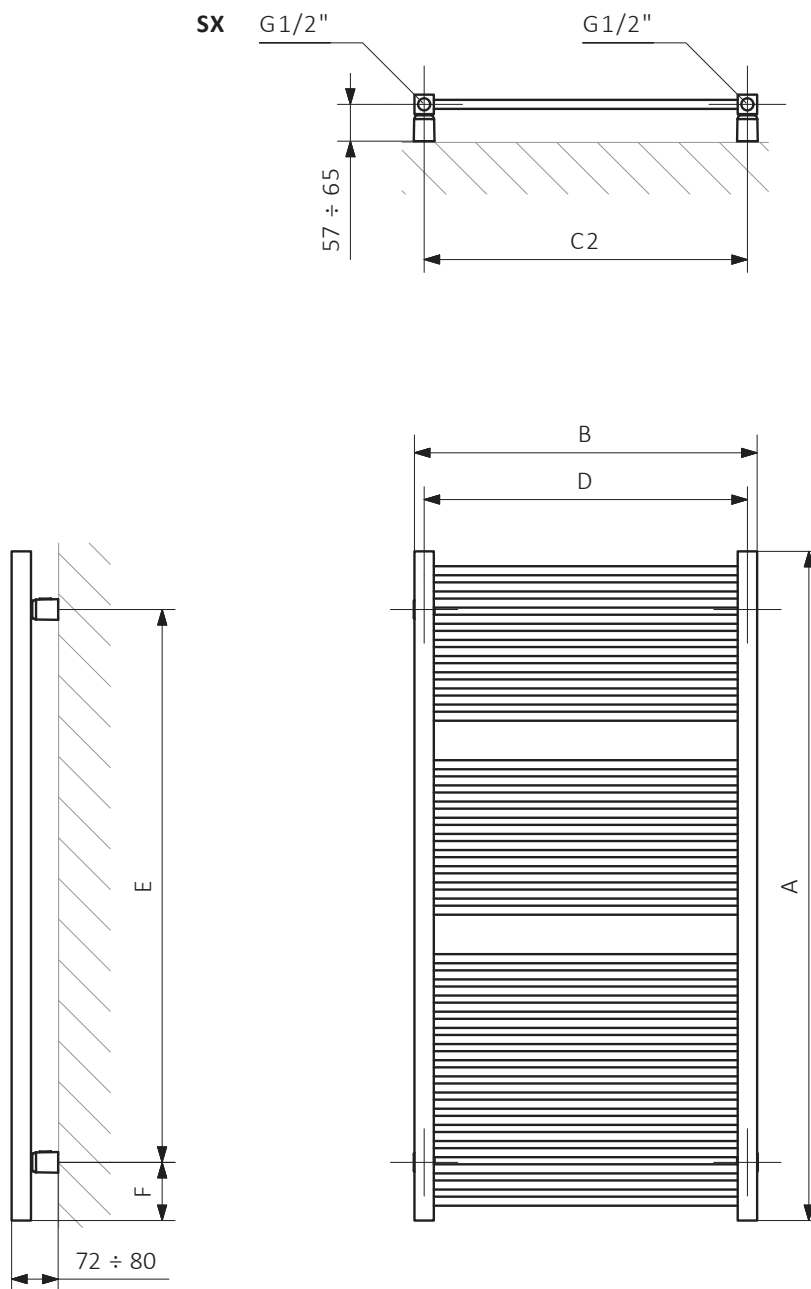

A – Höhe B – Breite C1-C5 – Abstand zwischen den Anschlüssen D – horizontaler Abstand zwischen den Befestigungen E – vertikaler Abstand zwischen den Geräten
F – Abstand zwischen der unteren Achse der Befestigungen und der Unterkante des Kollektors

