

| Référence | Nombre de marches | Dimensions (m) |      |      |      |      | Poids (Kg) |
|-----------|-------------------|----------------|------|------|------|------|------------|
|           |                   | A              | B    | C    | D    | E    |            |
| 9503/R    | 2 + plateforme    | 0.69           | 1.09 | 0.62 | 1.62 | 2.62 | 20.2       |
| 9504/R    | 3 + plateforme    | 0.79           | 1.19 | 0.83 | 1.83 | 2.83 | 21         |
| 9505/R    | 4 + plateforme    | 0.74           | 1.30 | 1.04 | 2.04 | 3.04 | 21.7       |
| 9506/R    | 5 + plateforme    | 0.76           | 1.38 | 1.25 | 2.25 | 3.25 | 22.5       |
| 9507/R    | 6 + plateforme    | 0.78           | 1.49 | 1.47 | 2.47 | 3.47 | 23.4       |
| 9508/R    | 7 + plateforme    | 0.81           | 1.59 | 1.67 | 2.67 | 3.67 | 24.2       |




X 4  
roues

Norme  
EN 131

Garantie  
2 ans

Fabrication  
EUROPE

150  
kg

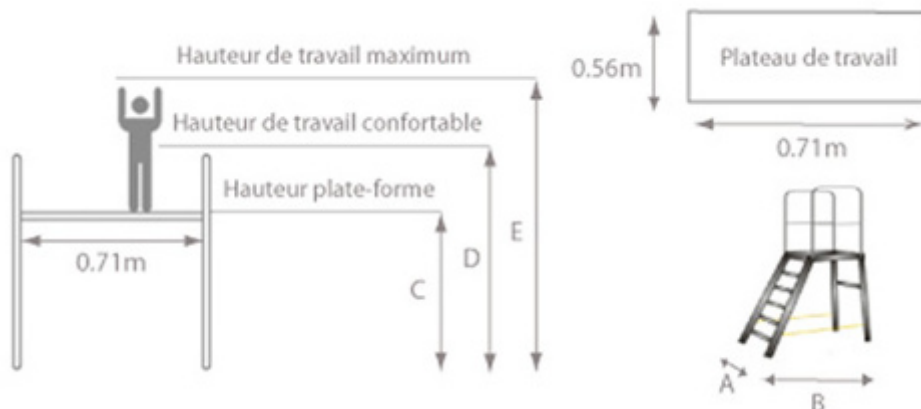

- Matière : aluminium.
- Protection latérale gauche et droite.
- 4 roues escamotables pour un blocage automatique lors de la montée.
- Marches antidérapantes de 80 mm de profondeur.
- Stabilisateurs sur les modèles de 5 à 7 marches.



Plancher



Plinthes



Pieds antidérapants

### Options :



Main courante de plateforme