



## Vera

SPARKLING BROWN // 1700 — 430 // 50 mm connection valve + “Noble” thermostatic head


LUX

## Verus

NOBLE GOLD // 1700 — 280 // 50 mm connection valve + “Slim” thermostatic head

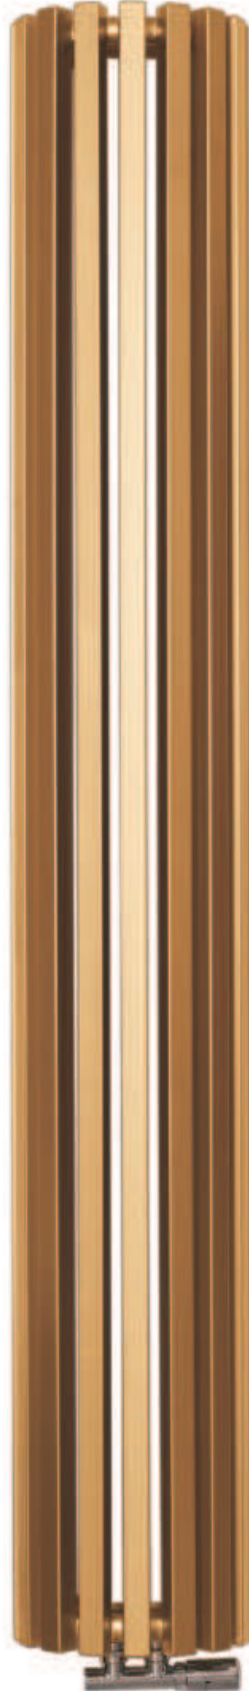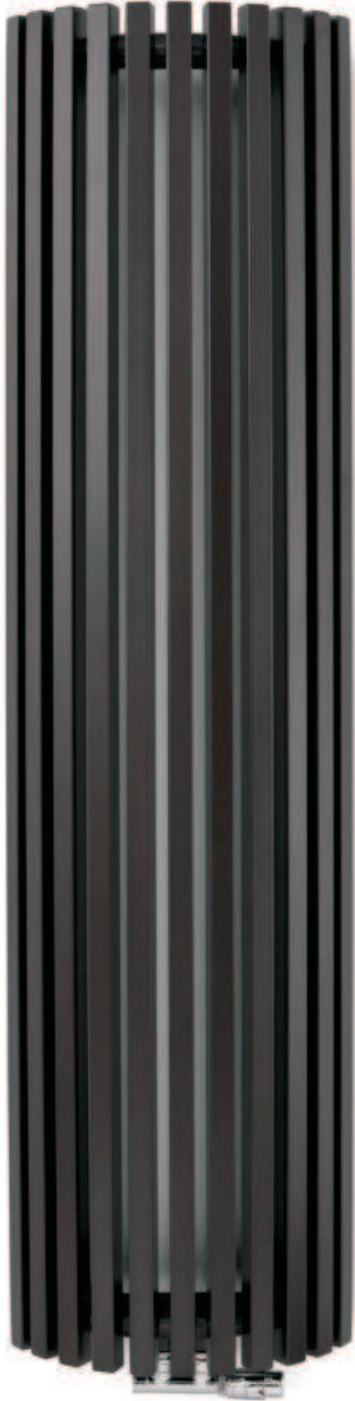










Standard connections:

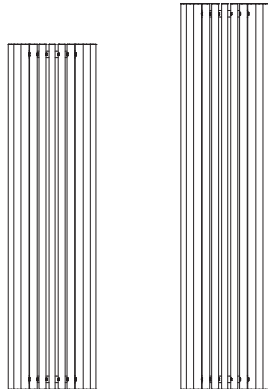


Sizes available:




A [mm]	B [mm]	C [mm]	C' [mm]		75/65/20 [W]	55/45/20 [W]		D [mm]	E [mm]	F [mm]	 [dm³]	 [Kg]
1700	430	50	-	RAL+TT	1122	572	-	240	1600	50	14,3	26,9
1900	430	50	-	RAL+TT	1255	640	-	240	1800	50	15,9	29,8


ZX

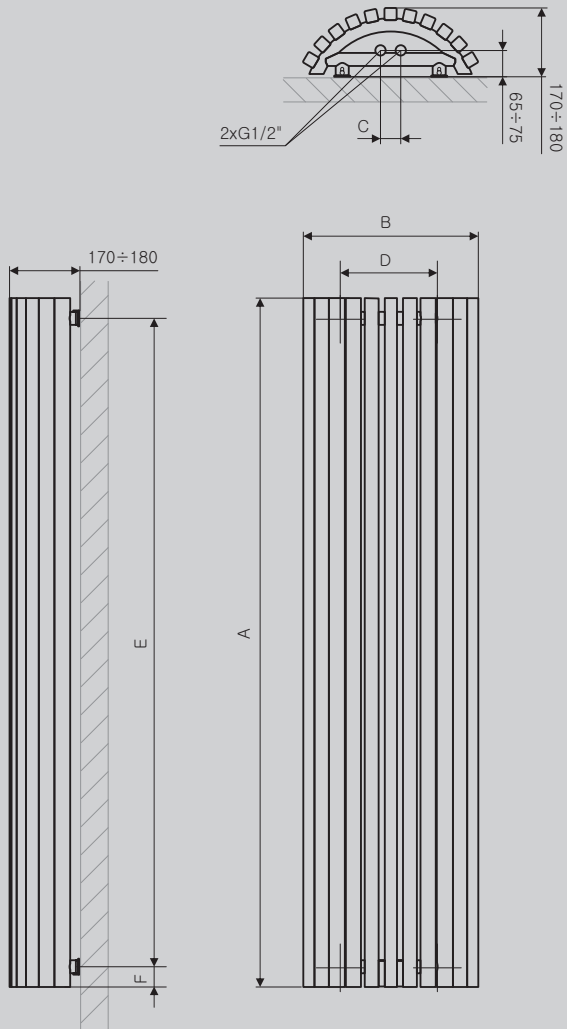


Standard version




Standard connections:




Sizes available:

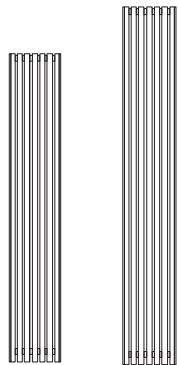


Corner version







Standard connections:

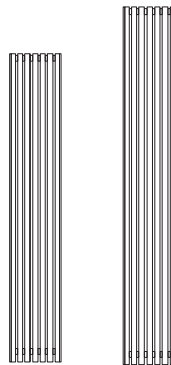


Sizes available:




A [mm]	B [mm]	C [mm]	C' [mm]		75/65/20 [W]	55/45/20 [W]		D [mm]	E [mm]	F [mm]		
Standard version												
1700	280	50	–	RAL+TT	953	486	1000	120	1600	50	11,4	23,2
1900	280	50	–	RAL+TT	1053	537	1000	120	1800	50	12,8	25,5
Corner version												
1700	280	50	–	RAL+TT	953	486	1000	120	1600	50	11,4	23,2
1900	280	50	–	RAL+TT	1053	537	1000	120	1800	50	12,8	25,5

Standard version

ZX

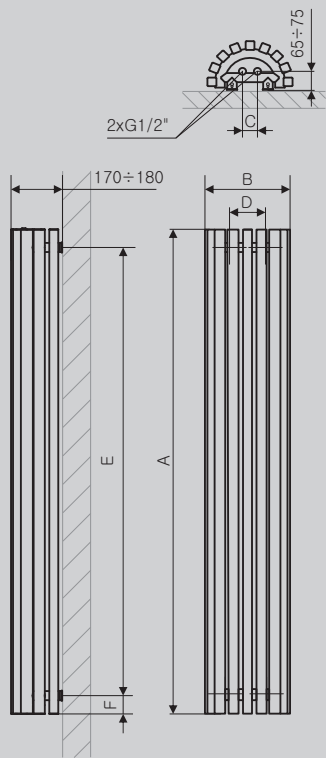


EX




Corner version

ZX

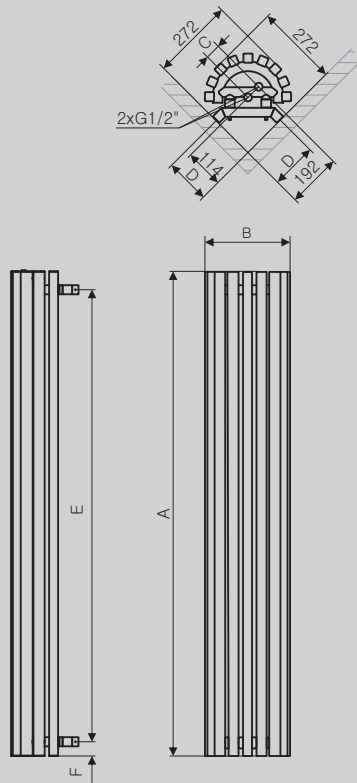

SX

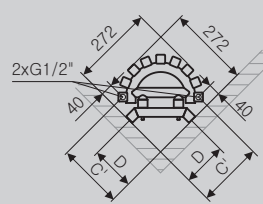

EX

