


Intra

RAL 4005 // 1700 — 410 // 50 mm connection valve + “Slim” thermostatic head // ZIP hanger

LUX



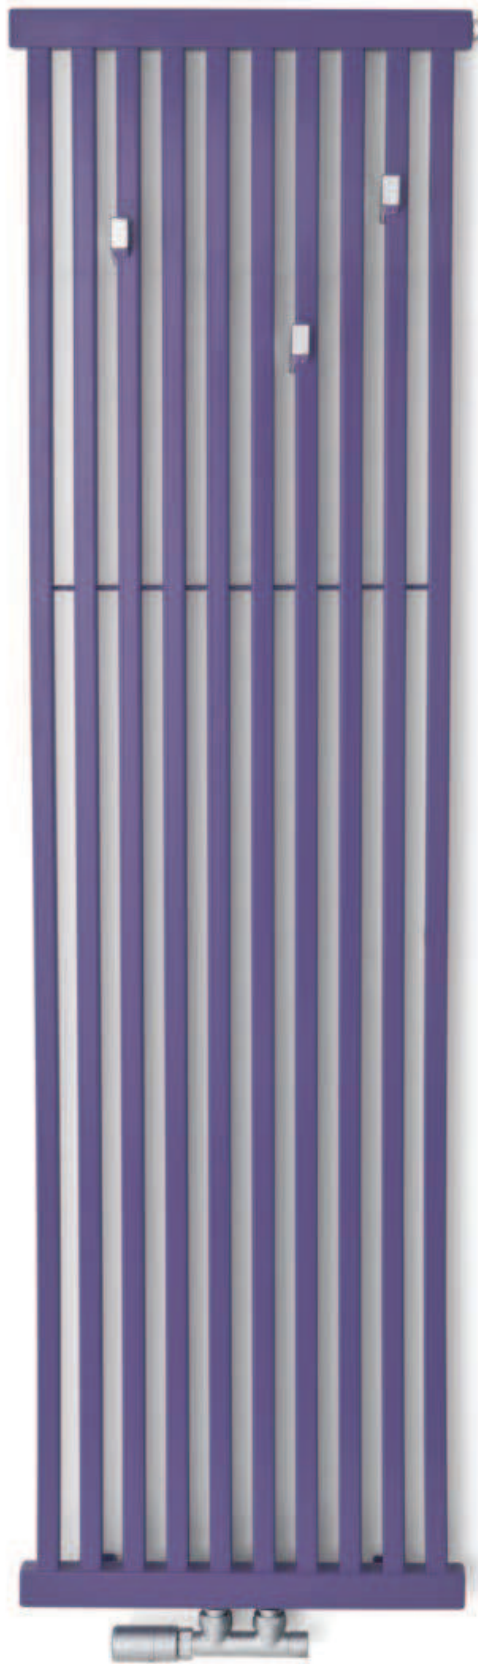




Standard connections:




Sizes available:

version without mirror

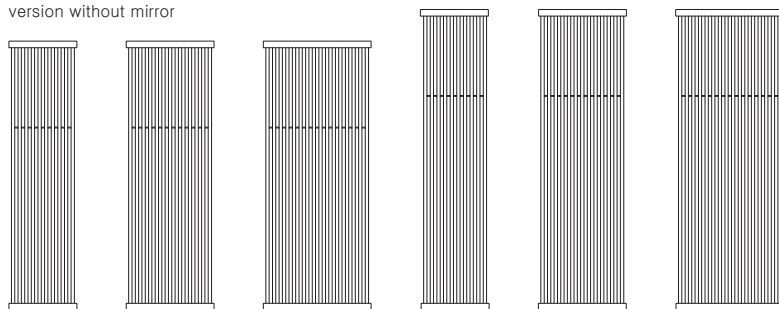


version with mirror

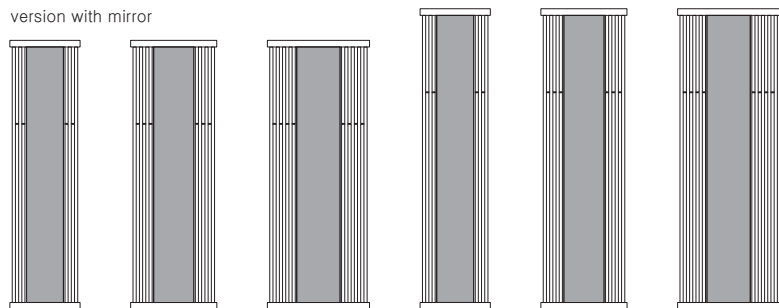


A	B	C	C'	C''		75/65/20	55/45/20		D	E	F		
[mm]	[mm]	[mm]	[mm]	[mm]		[W]	[W]	[W]	[mm]	[mm]	[mm]	[dm²]	[Kg]
version without mirror													
1700	410	50	370	410	RAL+TT	678	346	—	300	1660	20	4,6	13,1
1700	530	50	490	530	RAL+TT	864	441	—	400	1660	20	5,7	16,2
1700	650	50	610	650	RAL+TT	1041	531	—	500	1660	20	7,8	22,1
1900	410	50	370	410	RAL+TT	711	363	—	300	1860	20	7,7	14,4
1900	530	50	490	530	RAL+TT	904	461	—	400	1860	20	8,8	17,9
1900	650	50	610	650	RAL+TT	1089	556	—	500	1860	20	10,9	24,5
version with mirror													
1700	440	50	400	440	RAL+TT	549	280	—	300	1660	20	5,5	15,5
1700	540	50	500	540	RAL+TT	683	349	—	400	1660	20	7,1	20,1
1700	640	50	600	640	RAL+TT	925	472	—	500	1660	20	8,7	24,6
1900	440	50	400	440	RAL+TT	600	306	—	300	1860	20	6,1	17,2
1900	540	50	500	540	RAL+TT	762	389	—	400	1860	20	7,9	22,2
1900	640	50	600	640	RAL+TT	995	507	—	500	1860	20	9,7	27,3


P2

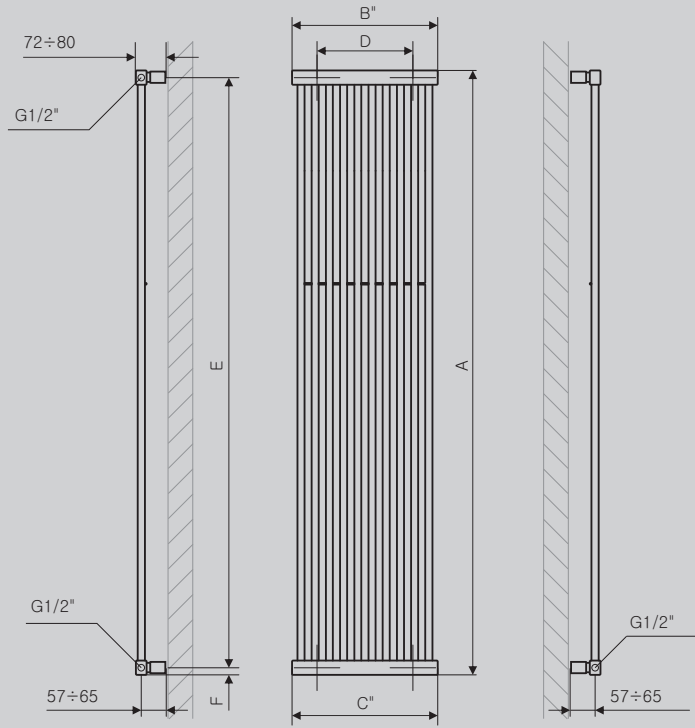


ZX



SX



YL



YP

