


# Angus DW

---



COLORE  
A SCELTA

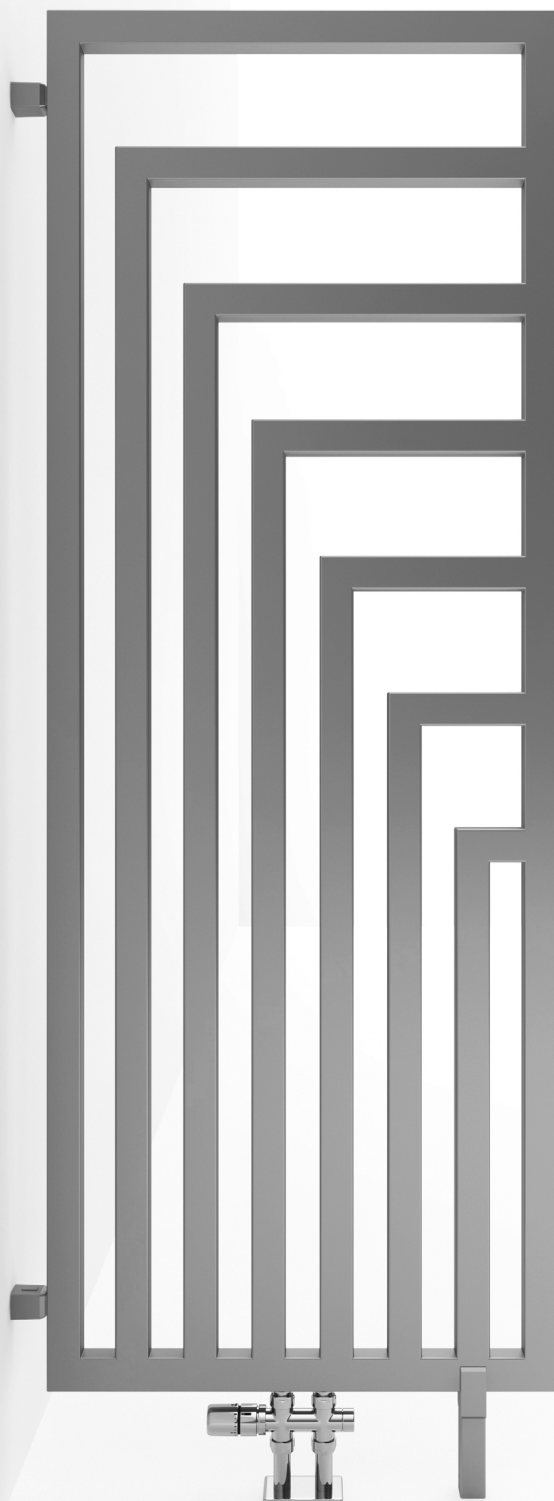

Trattamento : Cromato

# Angus DW

## Predisposizioni


Ad acqua calda



Misto



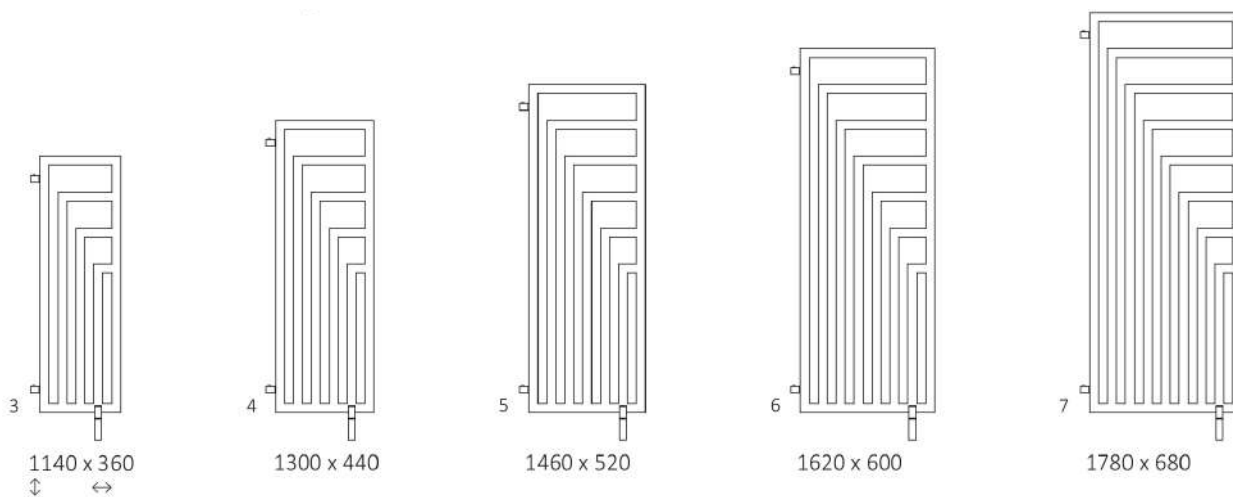

## Dimensioni disponibili




# Angus DW

## Informazioni tecniche :

Pressione del lavoro : 800 kPa    Temperatura massima di lavoro : 95°C

A $\updownarrow$ [mm]	B $\leftrightarrow$ [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	E [mm]	F [mm]	 [dm <sup>3</sup> ]	 [kg]
1140	360	50	320	421	224	400	940	100	5,18	11,50
1300	440	50	400	557	293	600	1100	100	6,92	15,36
1460	520	50	480	711	372	800	1260	100	8,88	19,71
1620	600	50	560	905	472	1000	1420	100	11,07	24,57
1780	680	50	640	1116	580	1200	1580	100	13,48	29,92

# Angus DW

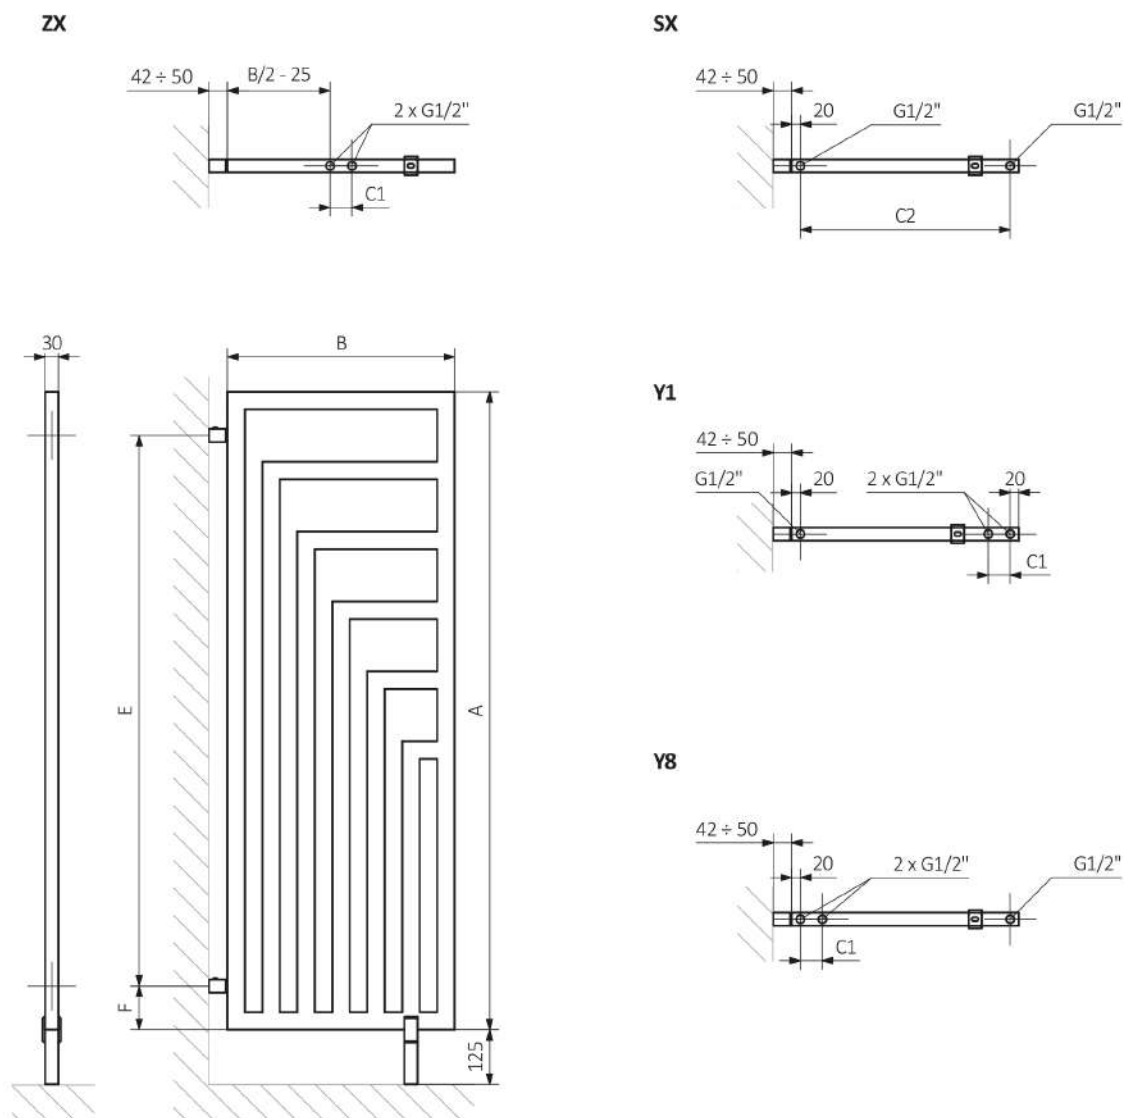

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

## Tubo :

Tube :

