

Case Slim



RAL 6004

Case Slim

Predisposizioni

Ad acqua calda



Elettrico



Misto



Dimensioni disponibili



585 x 900
↑ ↔



585 x 1100



585 x 1300



1360 x 420
↑ ↔



1360 x 520



1360 x 620



1585 x 420



1585 x 520



1585 x 620



1810 x 420
↑ ↔



1810 x 520






1810 x 620




Case Slim

Informazioni tecniche :

Pressione del lavoro : 800 kPa Temperatura massima di lavoro : 95°C


A ↓	B ↔	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
Metallo										
585	900	50	438	229	-	650	415	30	3,93	25,98
585	1100	50	536	281	-	850	415	30	4,69	32,76
585	1300	50	634	332	-	1050	415	30	5,44	38,41
1360	420	50	422	219	400	170	1190	30	5,26	30,12
1360	520	50	523	271	600	270	1190	30	6,23	36,67
1360	620	50	624	324	600	370	1190	30	7,19	43,21
1585	420	50	470	243	400	170	1415	30	6,18	34,92
1585	520	50	580	300	600	270	1415	30	7,31	42,56
1585	620	50	693	358	800	370	1415	30	8,45	50,19
1810	420	50	516	266	600	170	1640	30	7,09	39,73
1810	520	50	639	330	600	270	1640	30	8,40	48,44
1810	620	50	762	393	800	370	1640	30	9,70	57,16
Vetro										
585	900	50	438	229	-	650	415	30	3,93	32,59
585	1100	50	536	281	-	850	415	30	4,69	39,37
585	1300	50	634	332	-	1050	415	30	5,44	46,16
1360	420	50	422	219	400	170	1190	30	5,26	37,23
1360	520	50	523	271	600	270	1190	30	6,23	45,49
1360	620	50	624	324	600	370	1190	30	7,19	53,81
1585	420	50	470	243	400	170	1415	30	6,18	43,29
1585	520	50	580	300	600	270	1415	30	7,31	52,91
1585	620	50	693	358	800	370	1415	30	8,45	62,52
1810	420	50	516	266	600	170	1640	30	7,09	49,27
1810	520	50	639	330	600	270	1640	30	8,40	60,25
1810	620	50	762	393	800	370	1640	30	9,70	71,23
Specchio										
585	900	50	438	229	-	650	415	30	3,93	32,59
585	1100	50	536	281	-	850	415	30	4,69	39,37
585	1300	50	634	332	-	1050	415	30	5,44	46,16
1360	420	50	422	219	400	170	1190	30	5,26	37,23
1360	520	50	523	271	600	270	1190	30	6,23	45,49
1360	620	50	624	324	600	370	1190	30	7,19	53,81
1585	420	50	470	243	400	170	1415	30	6,18	43,29
1585	520	50	580	300	600	270	1415	30	7,31	52,91
1585	620	50	693	358	800	370	1415	30	8,45	62,52
1810	420	50	516	266	600	170	1640	30	7,09	49,27
1810	520	50	639	330	600	270	1640	30	8,40	60,25
1810	620	50	762	393	800	370	1640	30	9,70	71,23

Case Slim



A ↓	B ↔	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
Grafismo										
585	900	50	438	229	-	650	415	30	3,93	32,59
585	1100	50	536	281	-	850	415	30	4,69	39,37
585	1300	50	634	332	-	1050	415	30	5,44	46,16
1360	420	50	422	219	400	170	1190	30	5,26	37,23
1360	520	50	523	271	600	270	1190	30	6,23	45,49
1360	620	50	624	324	600	370	1190	30	7,19	53,81
1585	420	50	470	243	400	170	1415	30	6,18	43,29
1585	520	50	580	300	600	270	1415	30	7,31	52,91
1585	620	50	693	358	800	370	1415	30	8,45	62,52
1810	420	50	516	266	600	170	1640	30	7,09	49,27
1810	520	50	639	330	600	270	1640	30	8,40	60,25
1810	620	50	762	393	800	370	1640	30	9,70	71,23
Cemento										
585	900	50	438	229	-	650	415	30	3,93	27,98
585	1100	50	536	281	-	850	415	30	4,69	33,72
585	1300	50	634	332	-	1050	415	30	5,44	39,46
1360	420	50	422	219	400	170	1190	30	5,26	32,21
1360	520	50	523	271	600	270	1190	30	6,23	39,22
1360	620	50	624	324	600	370	1190	30	7,19	46,29
1585	420	50	470	243	400	170	1415	30	6,18	37,42
1585	520	50	580	300	600	270	1415	30	7,31	45,58
1585	620	50	693	358	800	370	1415	30	8,45	53,73
1810	420	50	516	266	600	170	1640	30	7,09	42,56
1810	520	50	639	330	600	270	1640	30	8,40	51,87
1810	620	50	762	393	800	370	1640	30	9,70	61,17

Case Slim


ZX

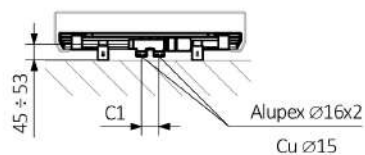


Z1

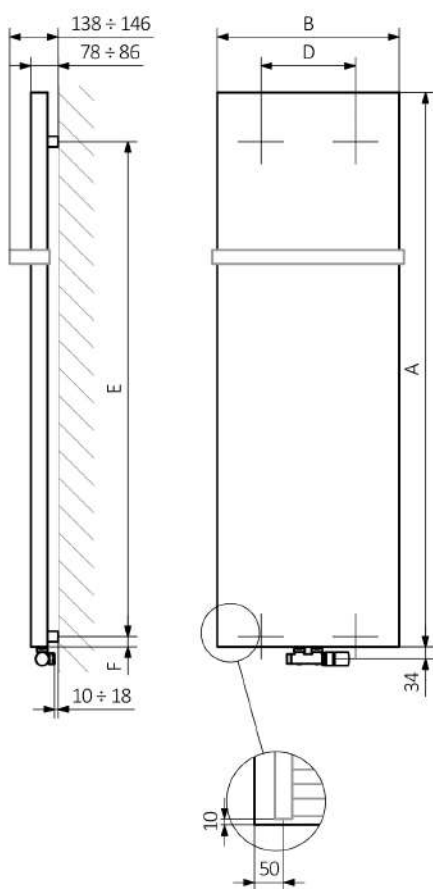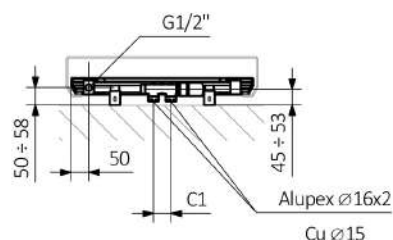


Z8

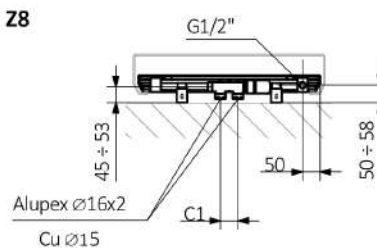

YL

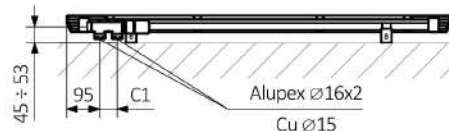


YP

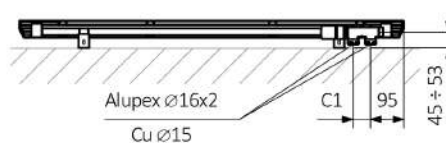

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Collettore:



Profilo:

