

Pajak



Trattamento : Rame

Pajak

Predisposizioni


Ad acqua calda




Elettrico




Dimensioni disponibili




1000 x 431
↕ ↔




1000 x 531




1000 x 631

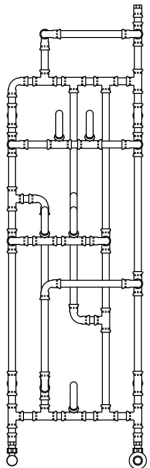

1400 x 431

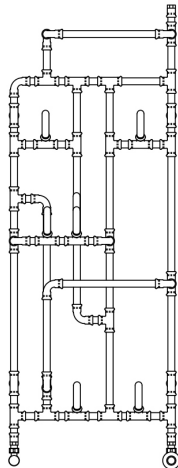


1400 x 531

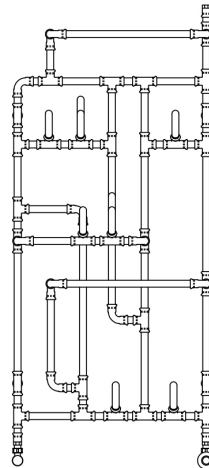


1400 x 631


Pajak

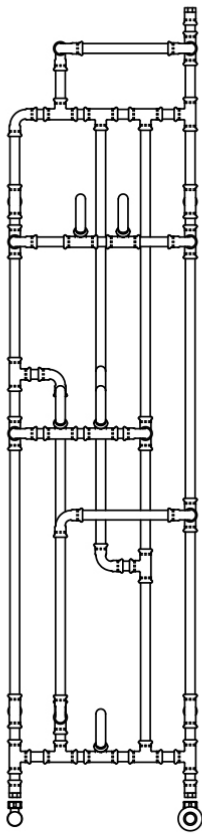

1800 x 431

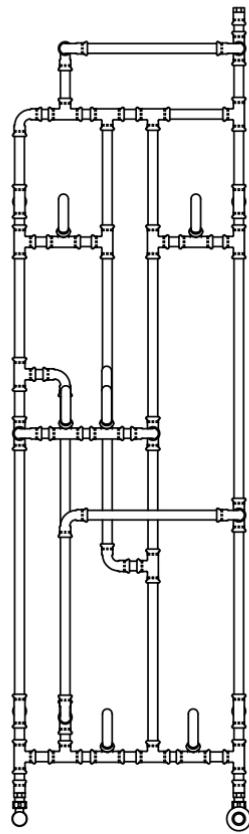

1800 x 531

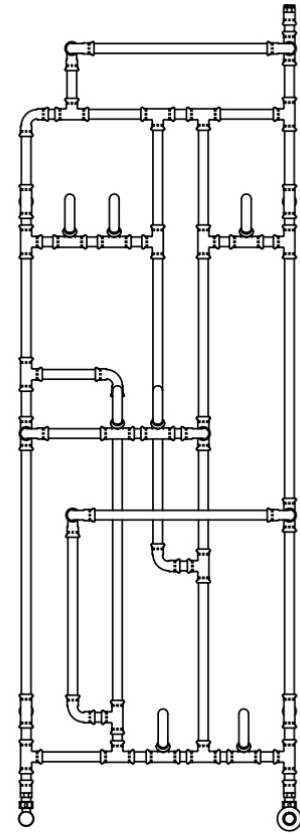




1800 x 631


Pajak

Informazioni tecniche :

Pressione del lavoro : 1.0MPa Temperatura massima di lavoro : 95°C

A ↕	B ↔	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
1000	431	400	300	165	300	400	505	196,5	2,13	9,0
1000	531	500	339	184	400	500	505	196,5	2,20	9,3
1000	631	600	380	205	400	600	505	196,5	2,46	10,1
1400	431	400	368	199	400	400	852	196,5	2,70	10,0
1400	531	500	424	227	400	500	852	196,5	2,77	10,4
1400	631	600	480	256	600	600	852	196,5	3,02	11,1
1800	431	400	437	234	400	400	1162	196,5	3,26	11,1
1800	531	500	510	272	600	500	1162	196,5	3,32	11,5
1800	631	600	582	310	600	600	1162	196,5	3,58	12,2

Pajak

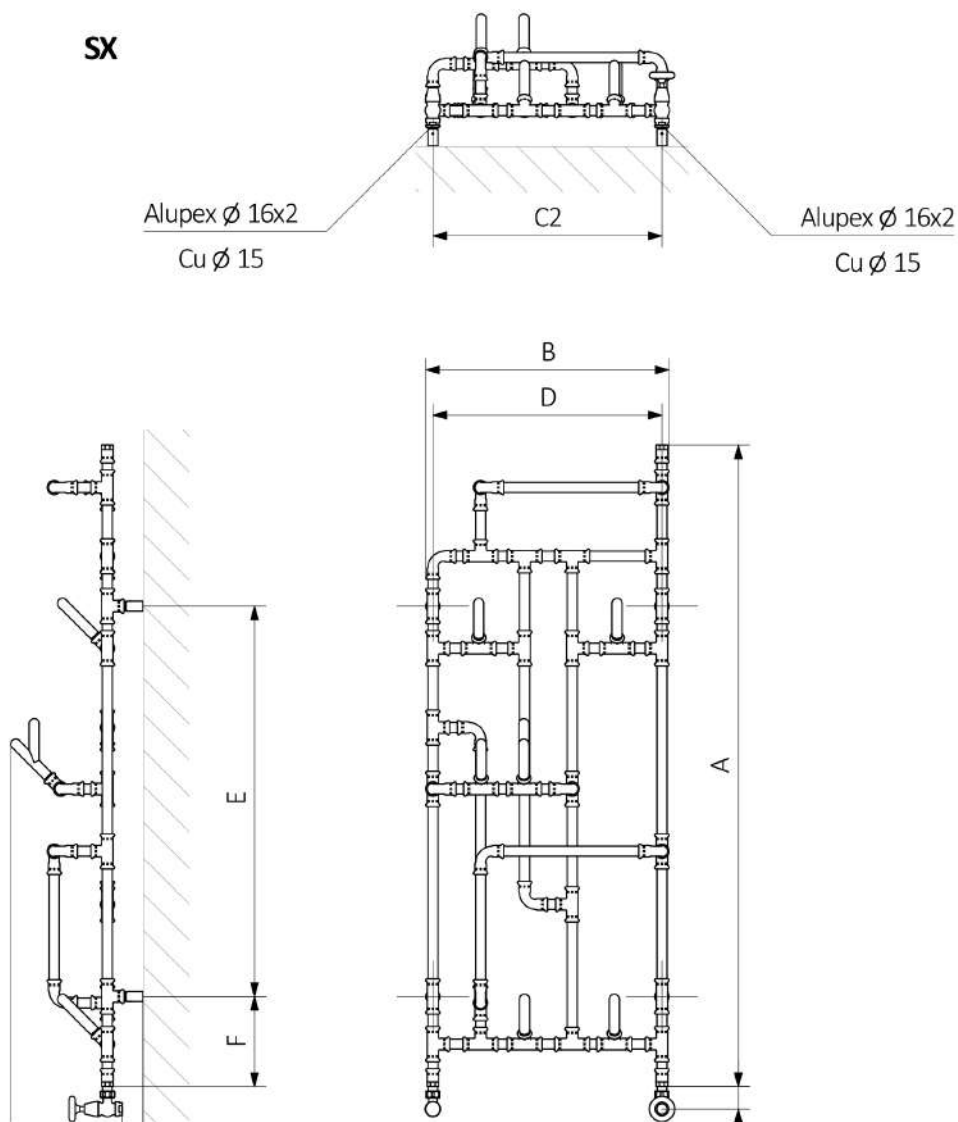

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Profilo:

