


Ribbon HWS



COLORE
A SCELTA

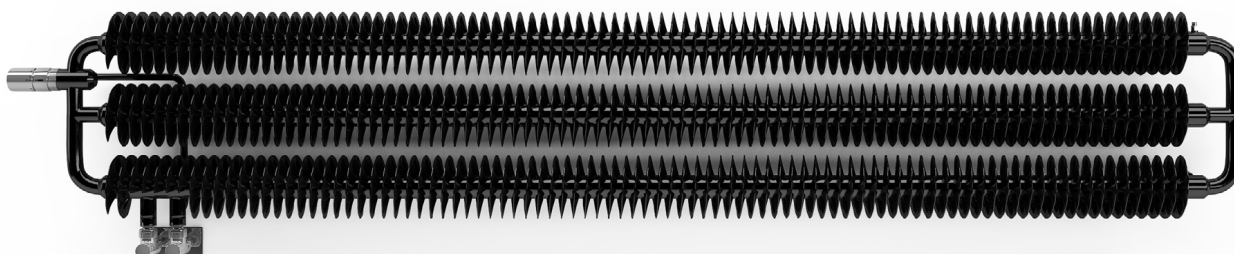

Ral : 9005










Ribbon HWS

Predisposizioni

Ad acqua calda



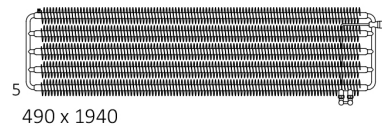

Dimensioni disponibili




Ribbon HWS

Informazioni tecniche :

Pressione del lavoro : 1.0 MPa Temperatura massima di lavoro : 95°C


| A ↕ | B ↔ | C1 [mm] | 75 65 20°C [W] | 55 45 20°C [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] |
|--------|--------|------------|-------------------|-------------------|-----------|-----------|-----------|--|---|
| 290 | 1540 | 50 | 802 | 411 | 1400 | 200 | 43 | 2,90 | 22,89 |
| 290 | 1740 | 50 | 906 | 464 | 1600 | 200 | 43 | 3,27 | 25,87 |
| 290 | 1940 | 50 | 1010 | 517 | 1800 | 200 | 43 | 3,64 | 28,86 |
| 390 | 1540 | 50 | 990 | 504 | 1400 | 300 | 43 | 3,78 | 29,99 |
| 390 | 1740 | 50 | 1119 | 570 | 1600 | 300 | 43 | 4,26 | 33,97 |
| 390 | 1940 | 50 | 1248 | 636 | 1800 | 300 | 43 | 4,75 | 37,95 |
| 490 | 1540 | 50 | 1329 | 670 | 1400 | 400 | 43 | 4,65 | 37,10 |
| 490 | 1740 | 50 | 1501 | 757 | 1600 | 400 | 43 | 5,26 | 42,07 |
| 490 | 1940 | 50 | 1673 | 844 | 1800 | 400 | 43 | 5,87 | 47,05 |

Ribbon HWS

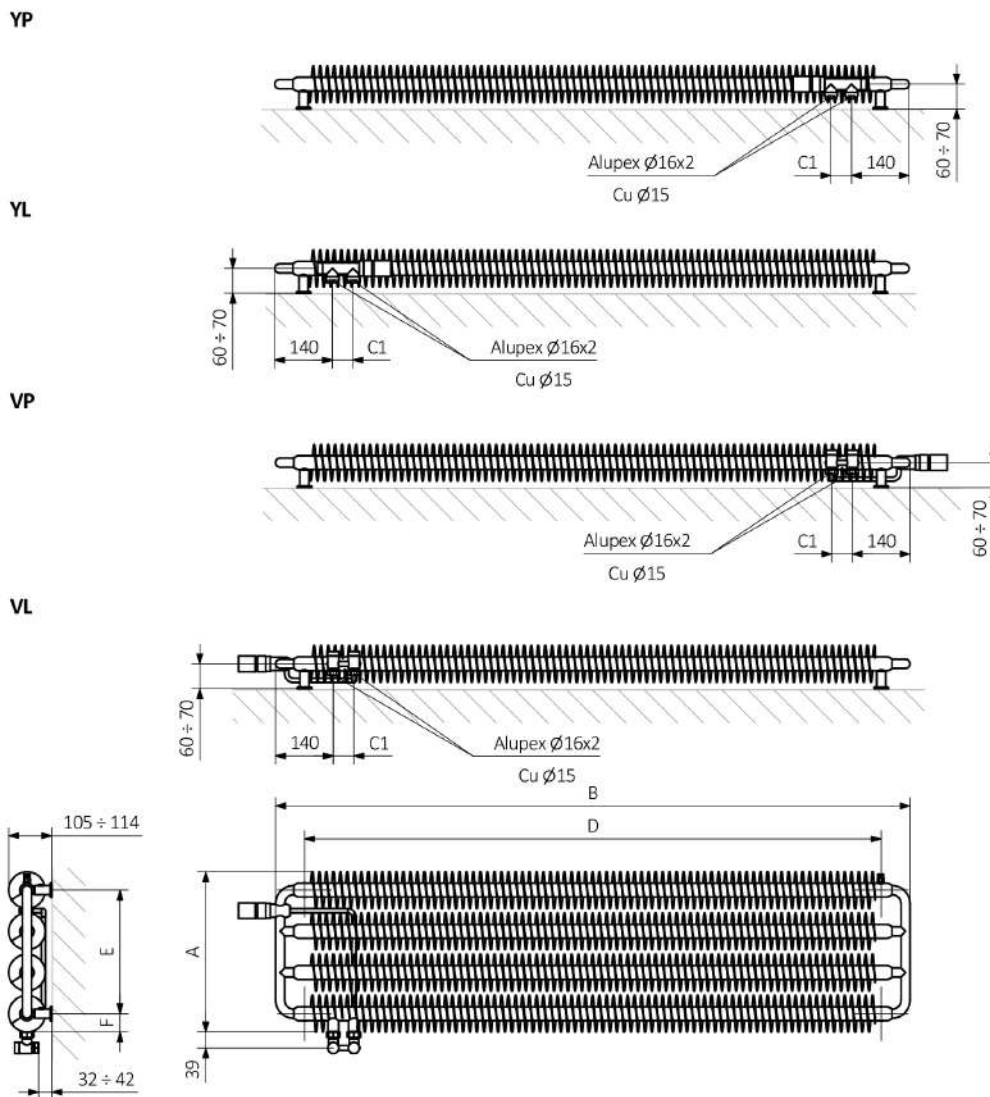

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Collettore :



Profilo :

