

# Simple DW

---



COLORE  
A SCELTA



Ral : 9005

# Simple DW

## Predisposizioni

Ad acqua calda






Elettrico



Misto



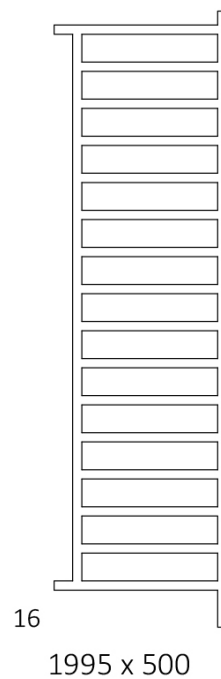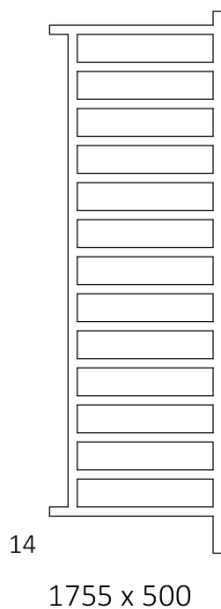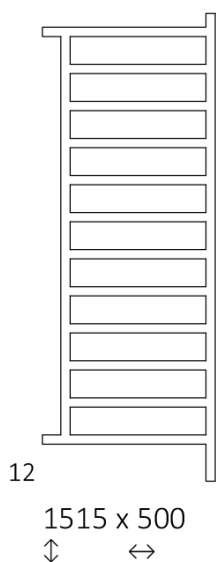


## Dimensioni disponibili




# Simple DW

## Informazioni tecniche :

Pressione del lavoro : 1.0 MPa    Temperatura massima di lavoro : 95°C

A ↓	B ↔	C1 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	E [mm]	F [mm]	 [dm³]	 [kg]
1515	500	50	529	271	600	1320	15	5,89	10,67
1755	500	50	618	308	600	1560	15	6,87	12,40
1995	500	50	707	343	800	1800	15	7,85	14,14

# Simple DW

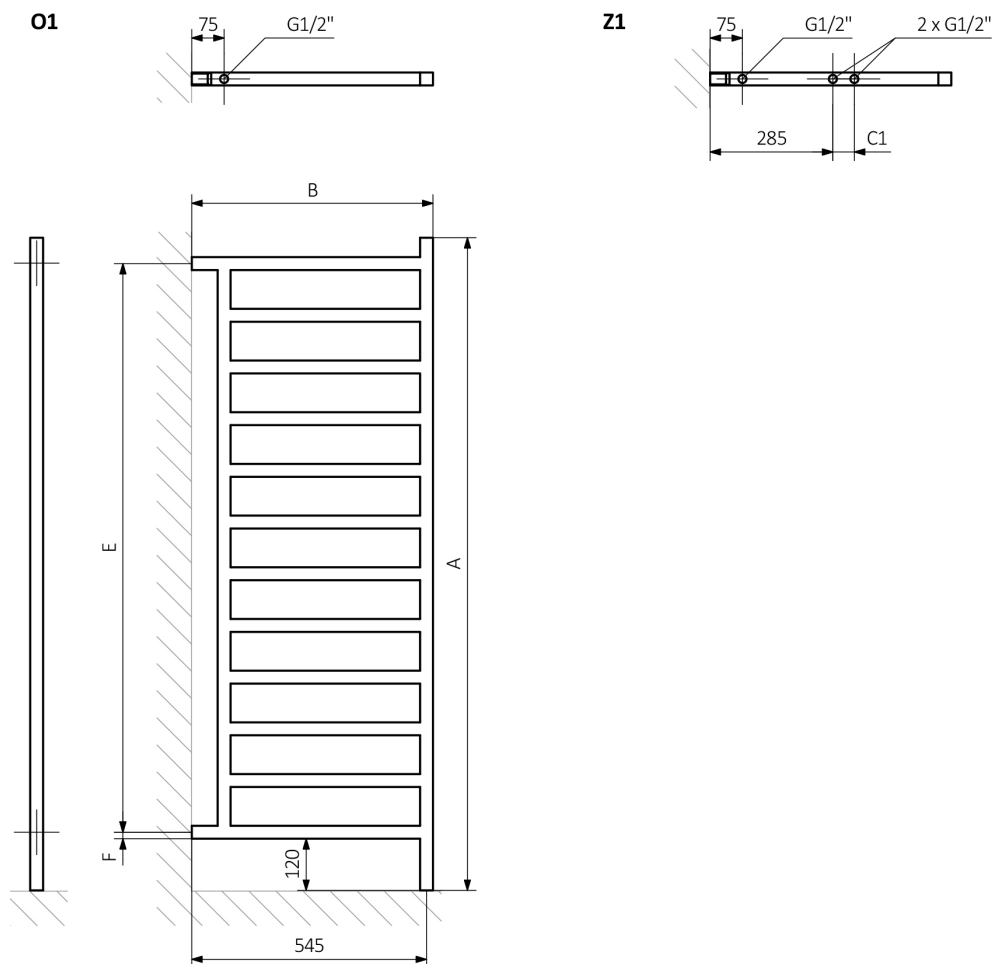

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

**Collettore :**

