

Retro Ottone







Retro

Predisposizioni

Acqua Calda



Dimensioni disponibili:

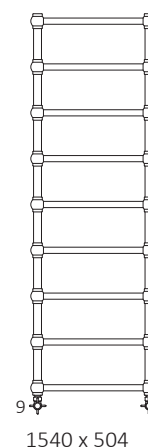

Retro

Dati tecnici:

Pressione del lavoro: 1000 kPa Temperatura massima di lavoro: 95°

A ↓ [mm]	B ↔ [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]
Vernice epossidica										
430	504	450	115	63	100	450	370	30	1,05	5,57
800	504	450	210	114	200	450	740	30	1,88	8,49
1170	504	450	308	165	300	450	1110	30	2,71	11,40
1540	504	450	405	216	400	450	1480	30	3,54	14,32
Rivestimento galvanico										
430	504	450	81	44	100	450	370	30	1,05	5,48
800	504	450	147	80	100	450	740	30	1,88	8,33
1170	504	450	216	116	200	450	1110	30	2,71	11,19
1540	504	450	284	151	300	450	1480	30	3,54	14,05

Set di regolazione angolare STAR



RUBINETTERIA INCLUSA

- Valvola termostatica triasse
- Valvola di intercettazione triasse
- Testa termostatica M30x1,5
- Elemento di mascheramento
- 2 adattatori multistrato Ø16
- 2 adattatori in rame Ø15

Dati tecnici:

Dimensioni	Versione
GZ 1/2" - Ø16x2, Ø15	Gauche
GZ 1/2" - Ø16x2, Ø15	Droit

