

# Retro ramato



# Retro

---





## Predisposizioni

---

Acqua Calda



## Dimensioni disponibili:

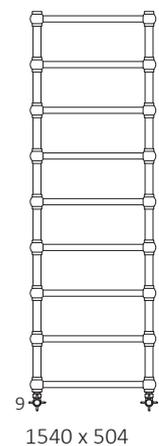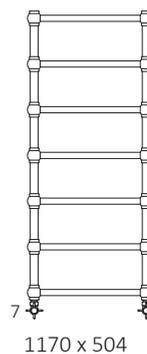

# Retro

## Dati tecnici:

Pressione del lavoro: 1000 kPa    Temperatura massima di lavoro: 95°

A ↓ [mm]	B ↔ [mm]	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]
<b>Vernice epossidica</b>										
430	504	450	115	63	100	450	370	30	1,05	5,57
800	504	450	210	114	200	450	740	30	1,88	8,49
1170	504	450	308	165	300	450	1110	30	2,71	11,40
1540	504	450	405	216	400	450	1480	30	3,54	14,32
<b>Rivestimento galvanico</b>										
430	504	450	81	44	100	450	370	30	1,05	5,48
800	504	450	147	80	100	450	740	30	1,88	8,33
1170	504	450	216	116	200	450	1110	30	2,71	11,19
1540	504	450	284	151	300	450	1480	30	3,54	14,05

# Set di regolazione angolare STAR

## RUBINETTERIA INCLUSA



- Kit di predisposizione compatibile per un'entrata e un'uscita a parete
- 2 valvole di regolazione angolare cromate dal design elegante e senza tempo
- 2 adattatori in rame Ø15
- 2 adattatori multistrato 16x2

## Dati tecnici:

Dimensione	Colore
GZ 1/2" - Ø16x2; Ø15	Chrome

