

Easy



RAL 9005

Easy

Predisposizioni

Ad acqua calda




Elettrico




Misto



Dimensioni disponibili




640 x 200
↓ ↔



960 x 200



1280 x 200



1600 x 200



1920 x 200

Easy

Informazioni tecniche :

Pressione del lavoro : 800 kPa Temperatura massima di lavoro : 95°C

A  [mm]	B  [mm]	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
---	---	------------	-------------------	-------------------	--	-----------	-----------	-----------	---	---


Vernice possidica

640	200	160	124	68	100	160	320	160	1,24	3,01
960	200	160	187	102	200	90	800	80	2,64	4,44
1280	200	160	251	136	300	160	960	160	3,48	5,78
1600	200	160	314	170	300	160	1280	160	4,56	7,17
1920	200	160	378	204	400	160	1600	160	5,72	8,55

Rivestimento galvanico

640	200	160	87	44	100	160	320	160	1,24	2,92
960	200	160	131	67	100	160	640	160	2,36	4,26
1280	200	160	176	90	200	160	960	160	3,48	5,60
1600	200	160	220	112	200	160	1280	160	4,56	6,94

Easy

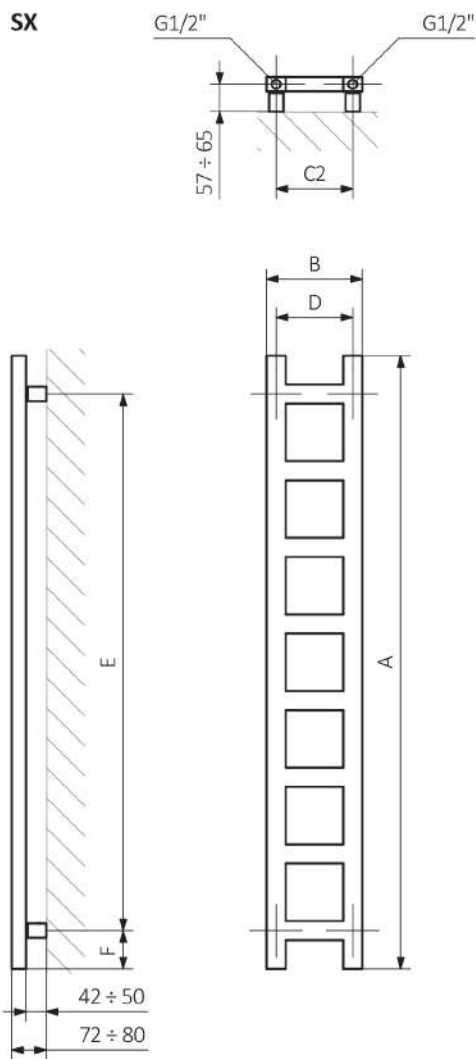

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Tubo :

