


# Iron D

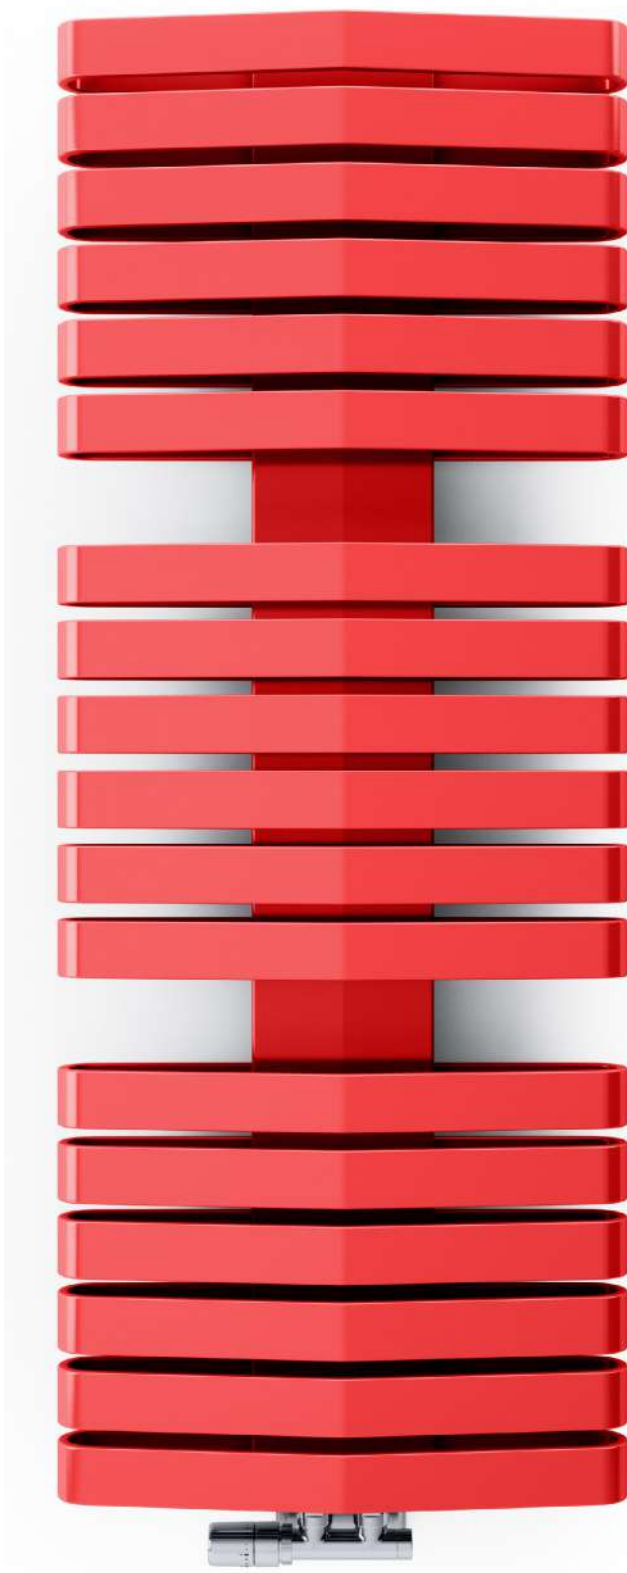

RAL 3028

# Iron D

## Predisposizioni

Ad acqua calda




Elettrico



Misto



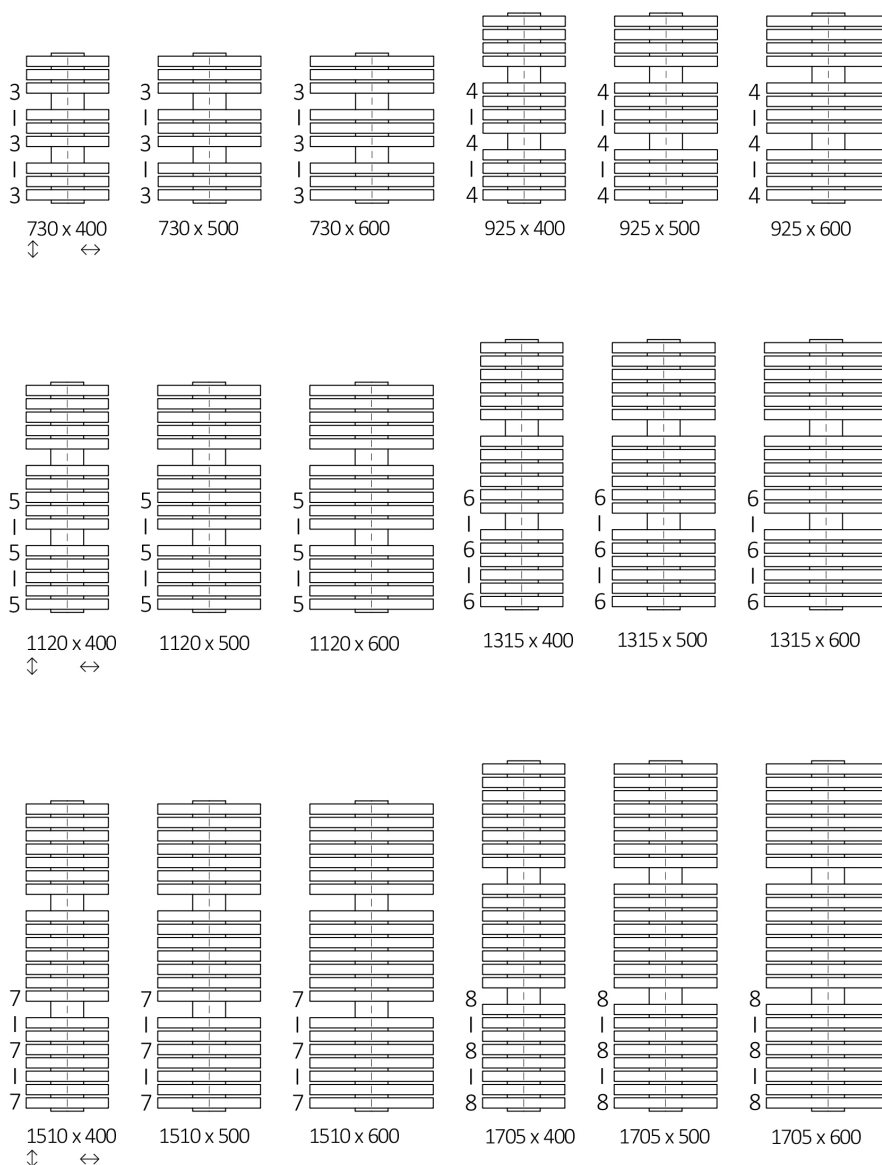


## Dimensioni disponibili



# Iron D

## Informazioni tecniche :



Pressione del lavoro : 600 kPa    Temperatura massima di lavoro : 95°C

A ↕ [mm]	B ↔ [mm]	C1 [mm]	756520°C [W]	554520°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
730	400	50	453	240	500	50	530	100	3,29	13,24
730	500	50	552	292	500	50	530	100	3,89	15,69
730	600	50	649	344	600	50	530	100	4,48	18,13
925	400	50	565	299	600	50	725	100	4,32	17,30
925	500	50	689	364	800	50	725	100	5,11	20,56
925	600	50	809	428	800	50	725	100	5,90	23,82
1120	400	50	676	358	800	50	920	100	5,36	21,35
1120	500	50	824	435	800	50	920	100	6,34	25,42
1120	600	50	969	511	1000	50	920	100	7,33	29,49
1315	400	50	788	417	800	50	1115	100	6,39	25,40
1315	500	50	960	506	1000	50	1115	100	7,57	30,28
1315	600	50	1128	593	1200	50	1115	100	8,76	35,18
1510	400	50	899	474	1000	50	1310	100	7,42	29,45
1510	500	50	1095	577	1000	50	1310	100	8,80	35,15
1510	600	50	1287	677	1200	50	1310	100	10,18	40,86
1705	400	50	1011	531	1000	50	1505	100	8,45	33,51
1705	500	50	1231	648	1200	50	1505	100	10,03	40,03
1705	600	50	1447	762	1500	50	1505	100	11,61	46,55

# Iron D


ZX

130 ÷ 138 (B=400)  
135 ÷ 143 (B=500)  
140 ÷ 148 (B=600)

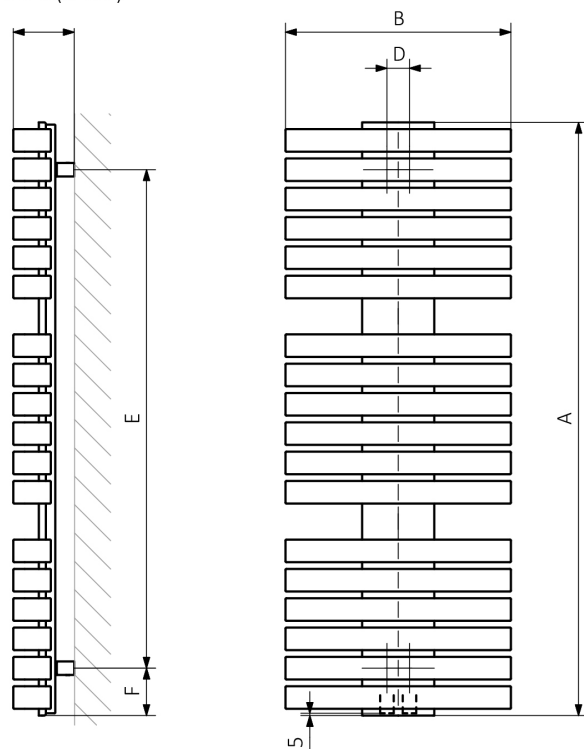

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Collettore:



Tubo:

