

Jade



Trattamento : Cromato

Jade

Predisposizioni

Ad acqua calda




Elettrico



Misto



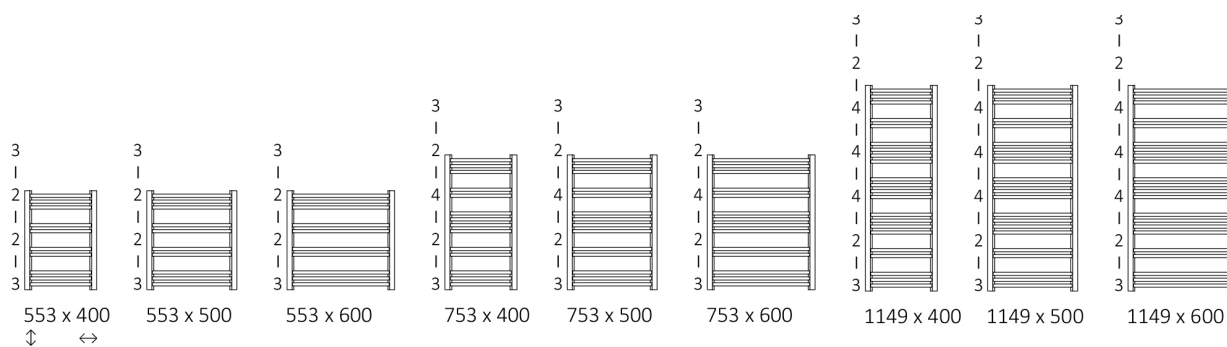


Dimensioni disponibili



Jade



Informazioni tecniche :

Pressione del lavoro : 1000 kPa Temperatura massima di lavoro : 95°C

A ↕	B ↔	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
Vernice possidica										
553	400	364	193	98	200	240	394	79,5	1,46	3,25
553	500	464	241	123	300	340	394	79,5	1,65	3,78
553	600	564	289	147	300	440	394	79,5	1,84	4,30
753	400	364	249	127	300	240	594	79,5	2,01	4,47
753	500	464	311	159	300	340	594	79,5	2,28	5,20
753	600	564	373	190	400	440	594	79,5	2,55	5,93
1149	400	364	361	184	400	240	990	79,5	3,11	6,89
1149	500	464	451	230	400	340	990	79,5	3,54	8,05
1149	600	564	541	276	600	440	990	79,5	3,95	9,19
Rivestimento galvanico										
553	400	364	135	69	120	240	394	79,5	1,46	3,25
553	500	464	169	86	200	340	394	79,5	1,65	3,78
553	600	564	202	103	200	440	394	79,5	1,84	4,30
753	400	364	174	89	200	240	594	79,5	2,01	4,47
753	500	464	218	111	200	340	594	79,5	2,28	5,20
753	600	564	261	133	300	440	594	79,5	2,55	5,93
1149	400	364	252	129	300	240	990	79,5	3,11	6,89
1149	500	464	315	161	300	340	990	79,5	3,54	8,05
1149	600	564	379	193	400	440	990	79,5	3,95	9,19

Jade

SX

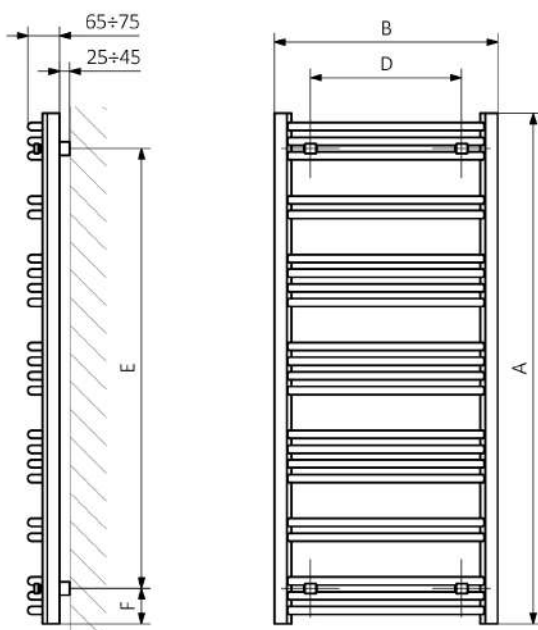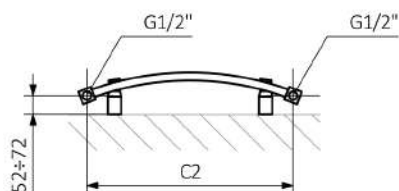

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Collettore:

Tubo :

