

# Kioto



RAL 4010

# Kioto

## Predisposizioni

Ad acqua calda




Elettrico




Misto




## Dimensioni disponibili




555 x 480  
↑ ↓ ← →




870 x 480



1185 x 480

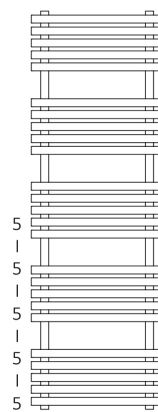

1500 x 480

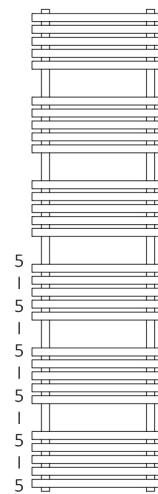




1815 x 480


# Kioto

## Informazioni tecniche :

Pressione del lavoro : 0.8 MPa    Temperatura massima di lavoro : 95°C

A ↕	B ↔	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm <sup>3</sup> ]	 [kg]
555	480	390	324	176	300	390	375	90	1,97	6,84
870	480	390	476	255	400	390	690	90	3,01	10,33
1185	480	390	628	336	600	390	1005	90	4,05	13,82
1500	480	390	780	415	800	390	1320	90	5,09	17,31
1815	480	390	932	496	1000	390	1635	90	6,13	20,80

# Kioto

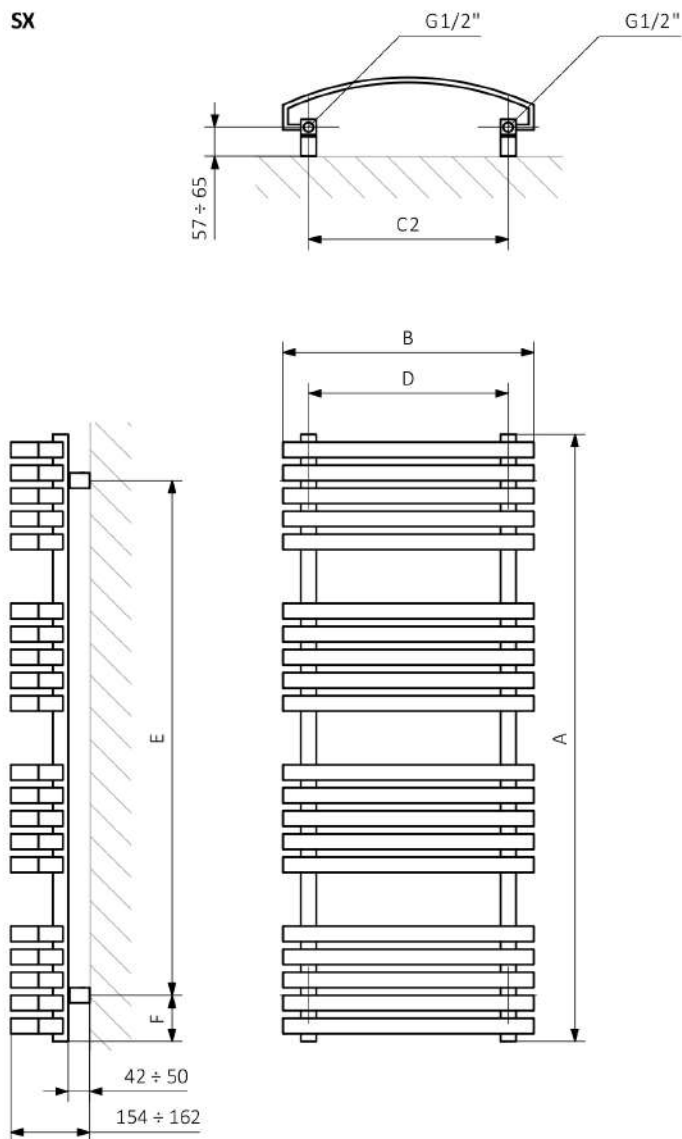

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

**Tubo :**

