

# Mantis



RAL5018

# Mantis

## Predisposizioni

Ad acqua calda









Elettrico



Misto



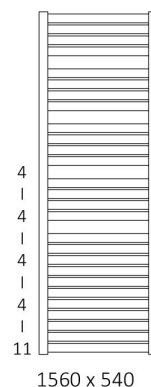


## Dimensioni disponibili




# Mantis

## Informazioni tecniche :

Pressione del lavoro : 0.8 MPa    Temperatura massima di lavoro : 95°C


A ↑↓	B ↔	C1 [mm]	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
860	440	50	400	351	185	400	400	680	90	3,03	9,05
860	540	50	500	423	223	400	500	680	90	3,41	10,71
1260	440	50	400	502	266	600	400	1080	90	4,44	13,42
1260	540	50	500	605	319	600	500	1080	90	5,00	15,79
1560	440	50	400	615	326	600	400	1380	90	5,47	16,51
1560	540	50	500	742	391	800	500	1380	90	6,17	19,42

# Mantis

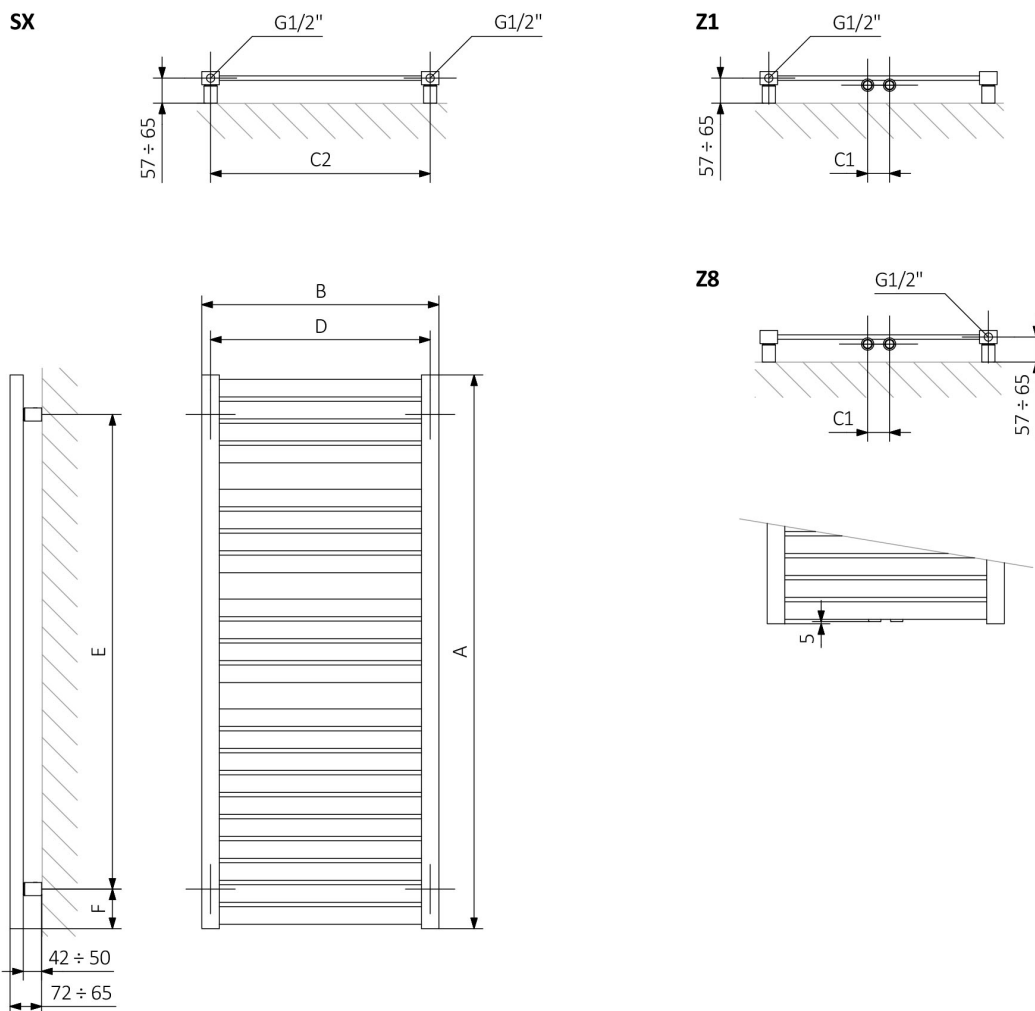

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

**Collettore:**



**Profilo:**

