


Mike

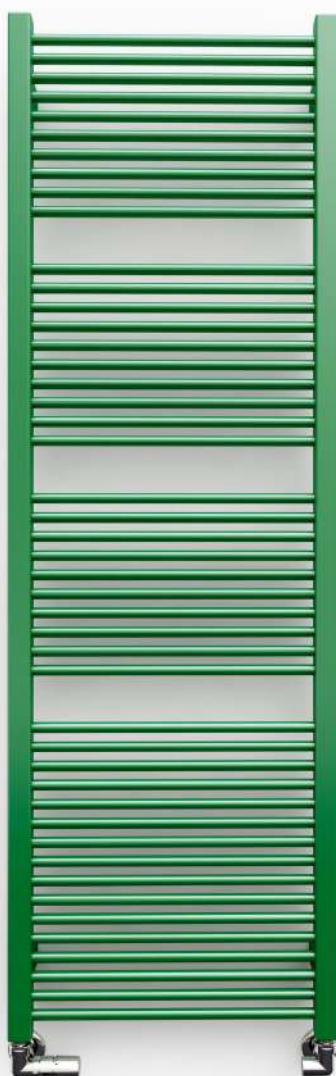

RAL 6029

Mike

Predisposizioni

Ad acqua calda



Elettrico



Misto






Dimensioni disponibili



Mike

Informazioni tecniche :

Pressione del lavoro : 1,0 MPa Temperatura massima di lavoro : 95°C



A ↓	B ↔	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
Vernice epossidica B <-> 430/530										
435	430	400	203	106	200	400	255	90	1,25	3,48
435	530	500	245	128	300	500	255	90	1,41	4,11
735	430	400	337	176	400	400	555	90	2,07	5,68
735	530	500	406	213	400	500	555	90	2,34	6,71
1035	430	400	466	245	400	400	855	90	2,89	7,89
1035	530	500	563	295	600	500	855	90	3,26	9,31
1335	430	400	593	312	600	400	1155	90	3,71	10,09
1335	530	500	715	376	800	500	1155	90	4,19	11,90
1635	430	400	716	377	800	400	1455	90	4,53	12,30
1635	530	500	864	454	800	500	1455	90	5,11	14,50

Vernice epossidica B <-> 230

460	230	200	122	64	120	200	280	90	0,92	2,16
710	230	200	185	97	200	200	530	90	1,40	3,25
960	230	200	247	130	300	200	780	90	1,89	4,35
1210	230	200	308	162	300	200	1030	90	2,38	5,45
1460	230	200	367	193	400	200	1280	90	2,86	6,54
1710	230	200	425	224	400	200	1530	90	3,35	7,64

Mike

SX

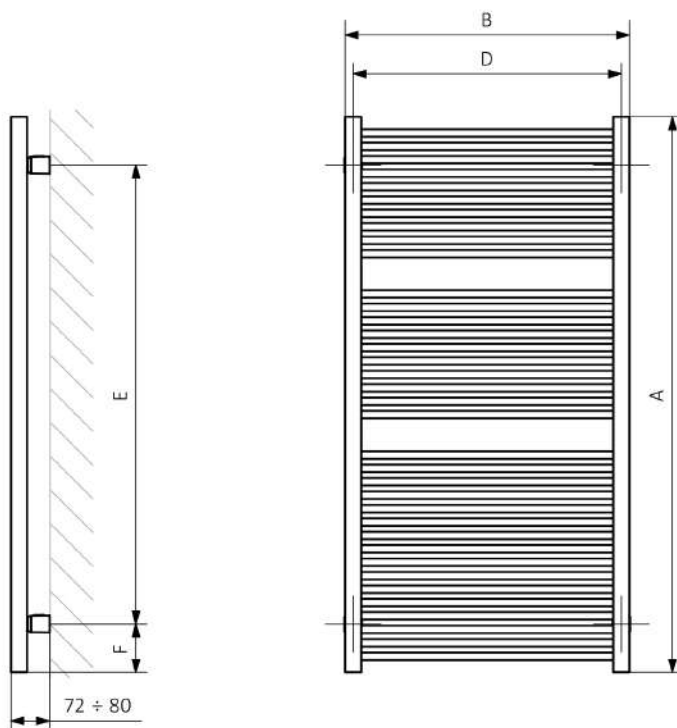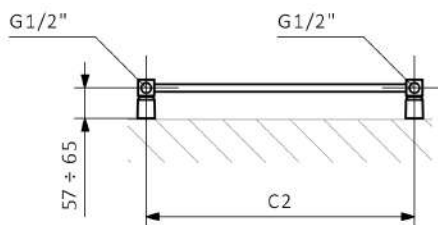

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Tubo :

