


Pola

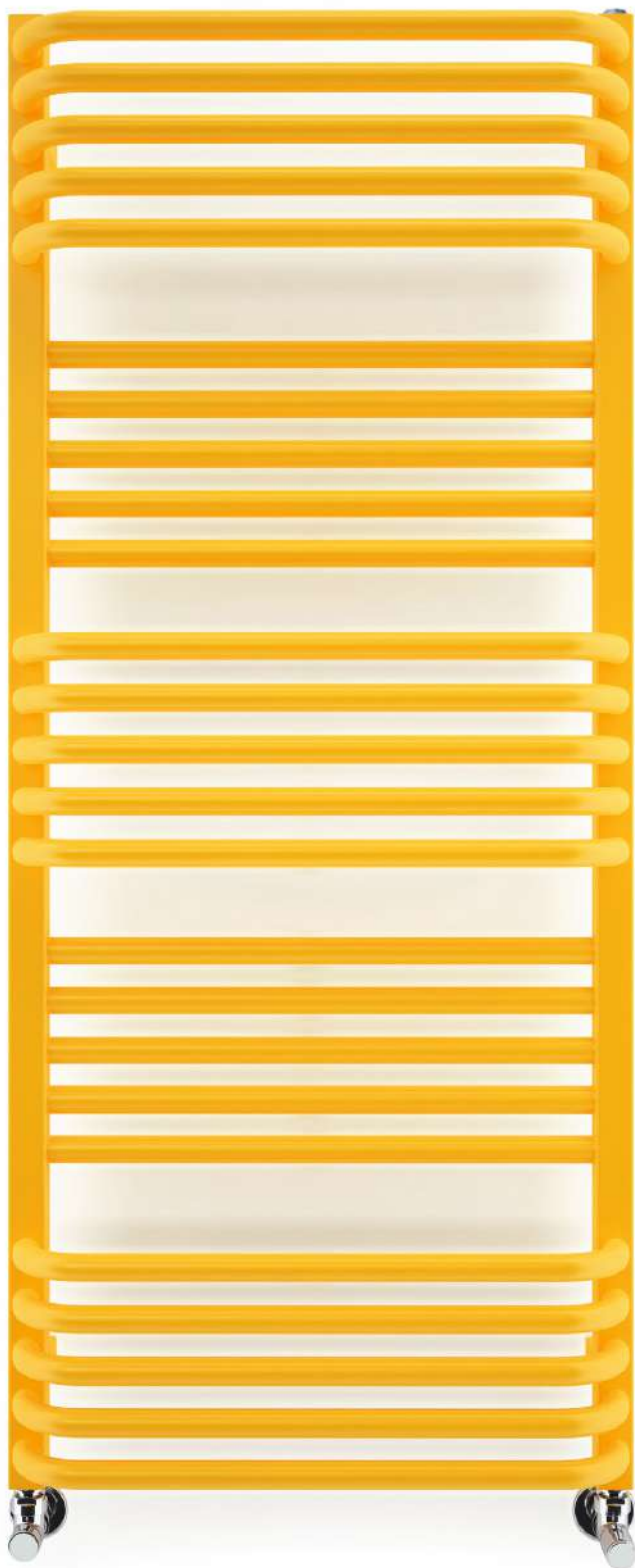

RAL 1033

Pola

Predisposizioni

Ad acqua calda



Elettrico









Misto



Dimensioni disponibili




Dimensions disponibles :







Pola

Informazioni tecniche :

Pressione del lavoro : 1.0 MPa Temperatura massima di lavoro : 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
Vernice epossidica											
780	500	50	470	392	211	400	470	600	90	3,34	6,72
780	600	50	570	471	254	400	570	600	90	3,79	7,68
1180	500	50	470	638	342	600	470	1000	90	5,39	10,84
1180	600	50	570	766	411	800	570	1000	90	6,14	12,44
1580	500	50	470	883	473	800	470	1400	90	7,44	14,96
1580	600	50	570	1061	568	1000	570	1400	90	8,49	17,20
Rivestimento galvanico											
780	500	50	470	274	140	300	470	600	90	3,34	6,72
780	600	50	570	330	168	300	570	600	90	3,79	7,68
1180	500	50	470	447	228	400	470	1000	90	5,39	10,84
1180	600	50	570	536	273	600	570	1000	90	6,14	12,44
1580	500	50	470	618	315	600	470	1400	90	7,44	14,96
1580	600	50	570	743	379	800	570	1400	90	8,49	17,20

Pola

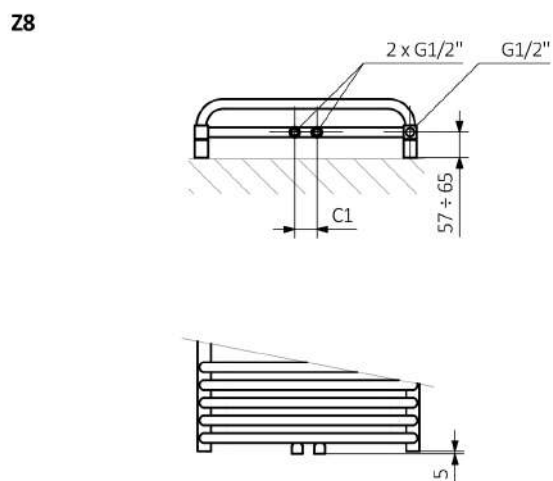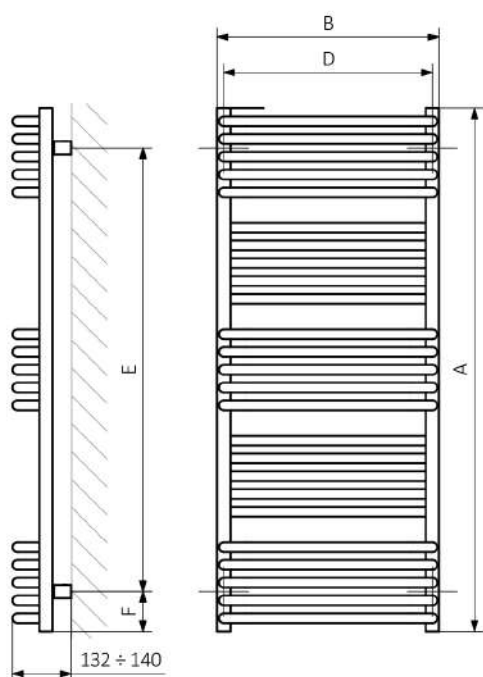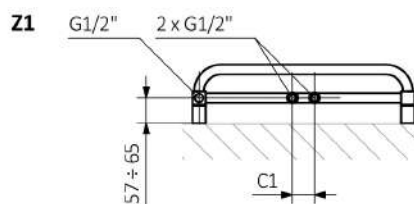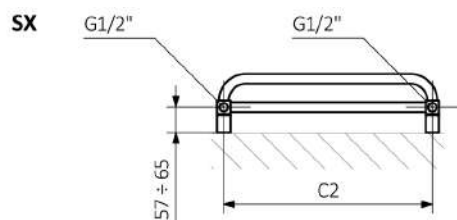

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Tubo :

