


Ribbon T

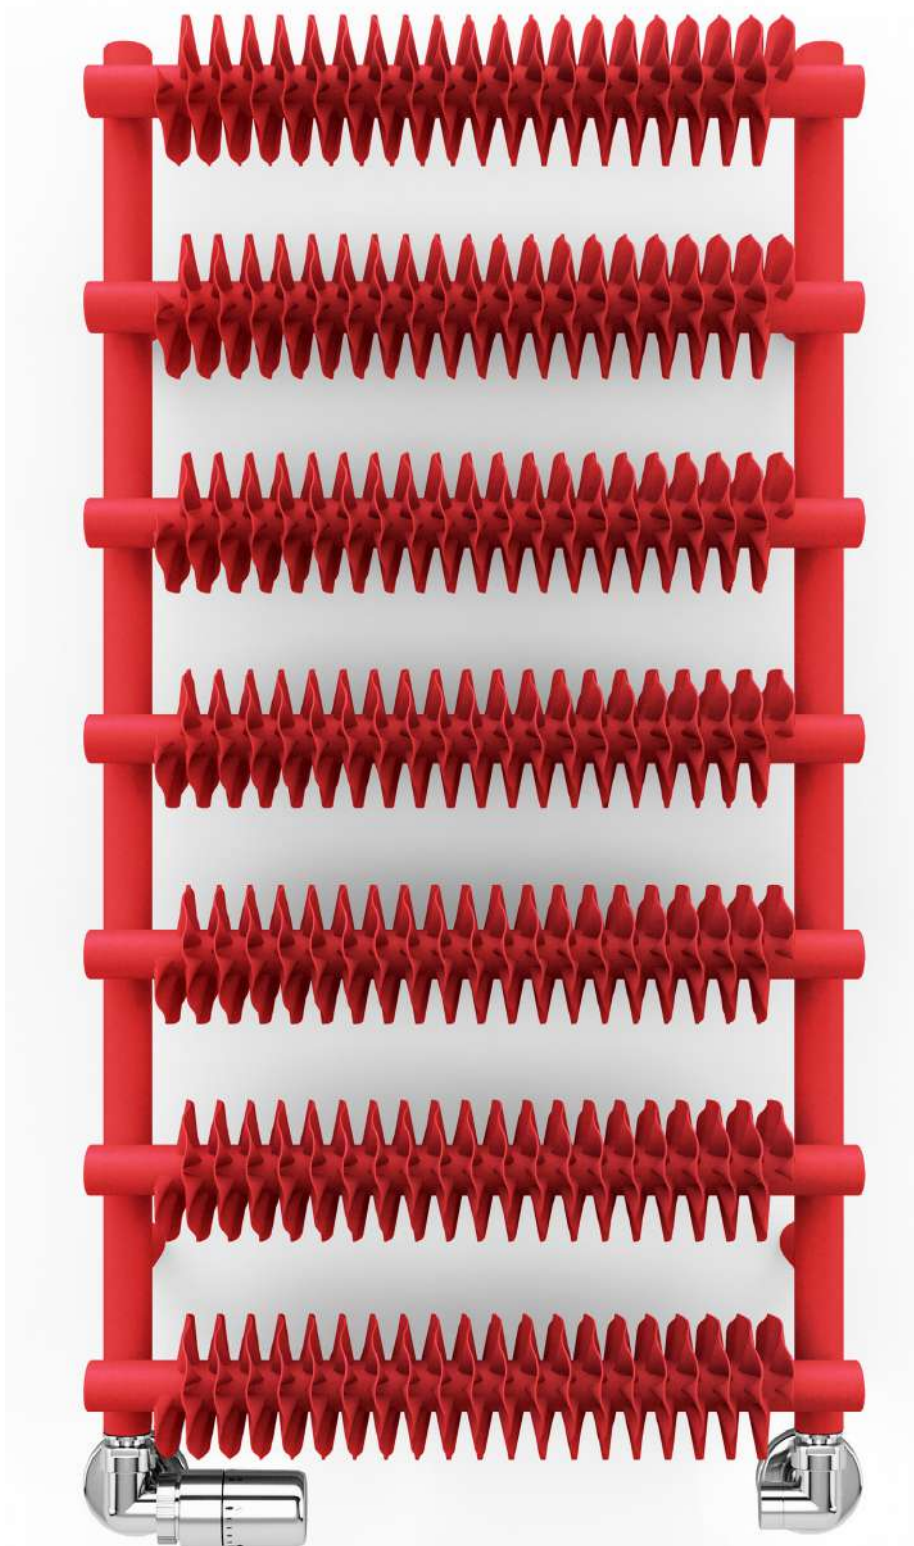

RAL ; 3020

Ribbon T

Predisposizioni

Ad acqua calda




Elettrico



Misto



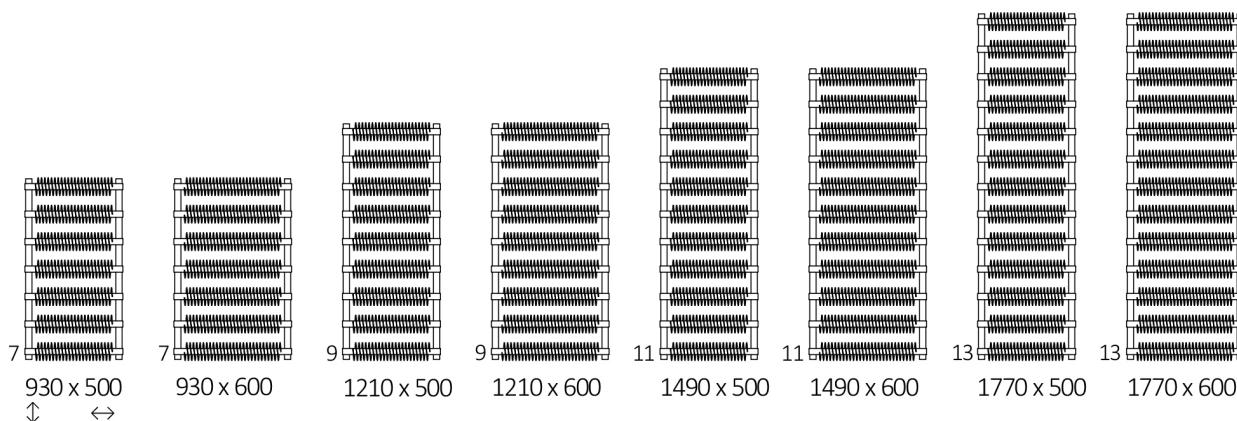


Dimensioni disponibili



Ribbon T


Informazioni tecniche :

Pressione del lavoro : 1000 kPa Temperatura massima di lavoro : 95°C

A \updownarrow [mm]	B \leftrightarrow [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
930	500	460	625	332	600	460	715	107,5	3,02	16,9
930	600	560	766	409	800	560	715	107,5	3,45	20,5
1210	500	460	803	424	800	460	995	107,5	3,91	21,7
1210	600	560	968	510	1000	560	995	107,5	4,46	26,5
1490	500	460	981	515	1000	460	1275	107,5	4,79	26,6
1490	600	560	1171	608	1200	560	1275	107,5	5,47	32,4
1770	500	460	1160	605	1200	460	1555	107,5	5,68	31,4
1770	600	560	1373	707	1500	560	1555	107,5	6,48	38,2

Ribbon T

SX

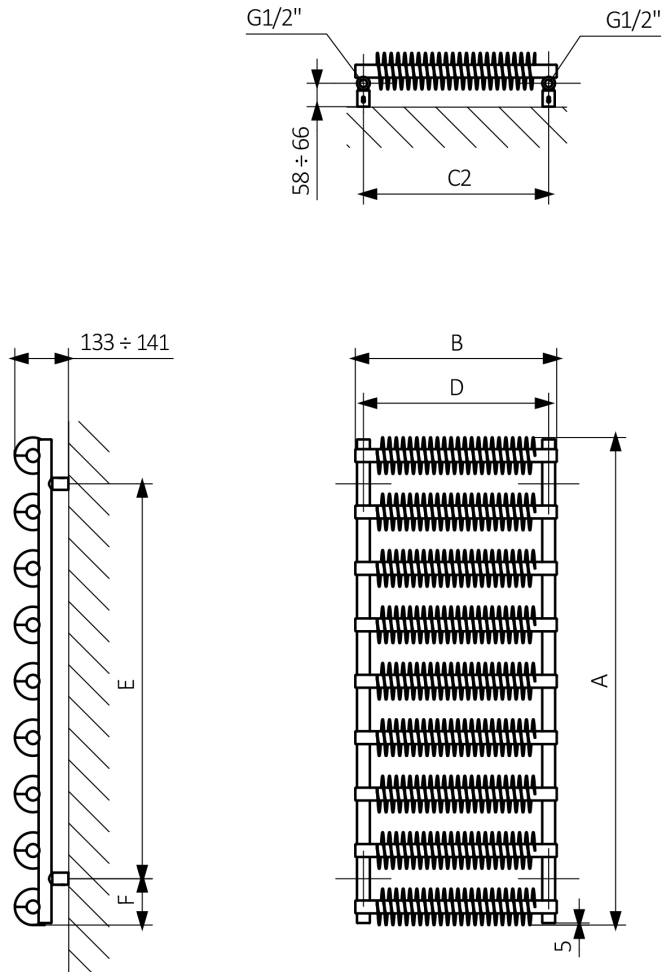

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Collettore:



Tubo :

