

Triga M



COLORE
A SCELTA



RAL: 4006

Triga M

Predisposizioni


Ad acqua calda



Misto



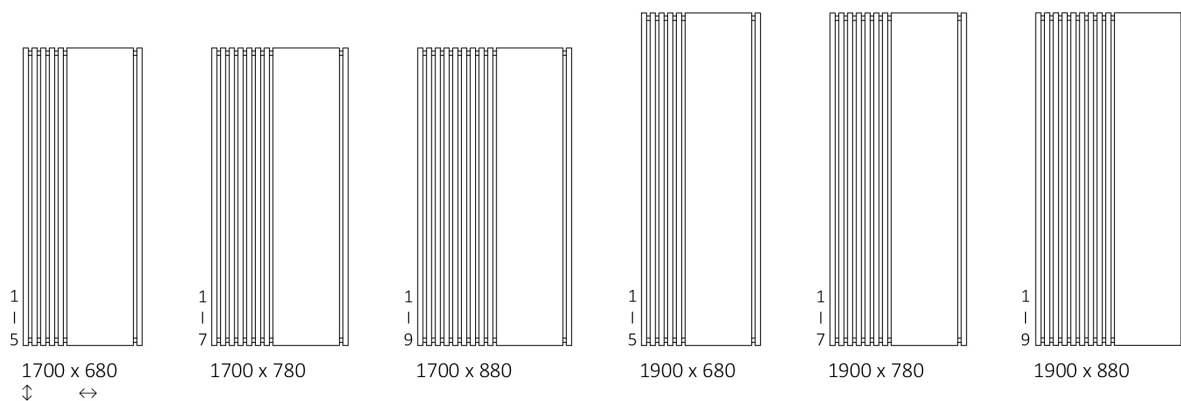


Dimensioni disponibili




Triga M

Informazioni tecniche :

Pressione del lavoro : 0.8 MPa Temperatura massima di lavoro : 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
1700	680	50	650	646	332	600	650	1520	90	10,55	28,25
1700	780	50	750	850	437	800	750	1520	90	13,97	33,75
1700	880	50	850	1074	552	1000	850	1520	90	17,39	39,24
1900	680	50	650	721	369	800	650	1720	90	11,75	31,43
1900	780	50	750	961	492	1000	750	1720	90	15,57	37,54
1900	880	50	850	1202	615	1200	850	1720	90	19,39	43,64

Triga M

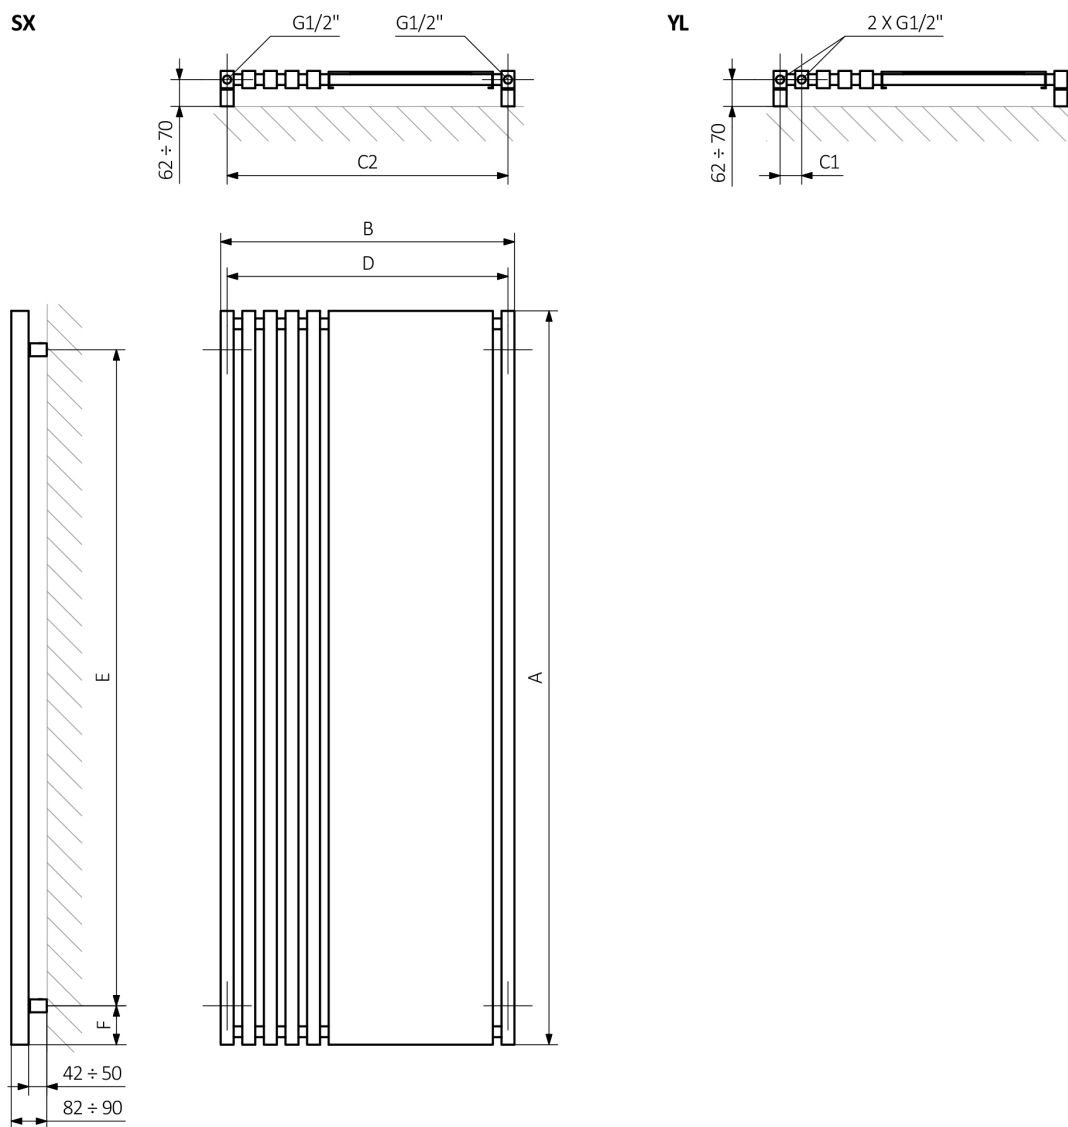

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Collettore :

Profilo :

