

# Tytus

---



Colore : Silver Mat

# Tytus

## Predisposizioni

Ad acqua calda




Elettrico



Misto



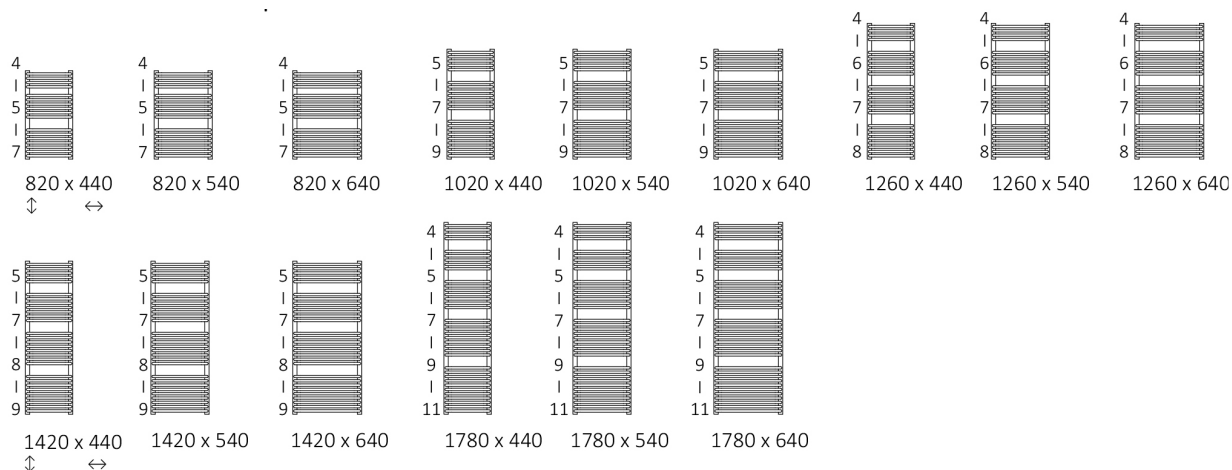


## Dimensioni disponibili




# Tytus

## Informazioni tecniche :

Pressione del lavoro : 0.8 MPa    Temperatura massima di lavoro : 95°C


A ↕	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
820	440	50	400	533	288	600	400	640	90	5,44	11,70
820	540	50	500	645	348	600	500	640	90	6,39	13,75
820	640	50	600	755	407	800	600	640	90	7,35	15,80
1020	440	50	400	666	358	600	400	840	90	7,03	15,09
1020	540	50	500	806	433	800	500	840	90	8,29	17,78
1020	640	50	600	943	507	1000	600	840	90	9,54	20,47
1260	440	50	400	828	444	800	400	1080	90	8,46	18,12
1260	540	50	500	1002	537	1000	500	1080	90	9,95	21,32
1260	640	50	600	1173	628	1200	600	1080	90	11,44	24,52
1420	440	50	400	930	497	1000	400	1240	90	9,73	20,83
1420	540	50	500	1126	602	1200	500	1240	90	11,46	24,54
1420	640	50	600	1317	704	1200	600	1240	90	13,20	28,26
1780	440	50	400	1167	623	1200	400	1600	90	12,11	25,89
1780	540	50	500	1412	753	1500	500	1600	90	14,26	30,50
1780	640	50	600	1652	881	1500	600	1600	90	16,41	35,12

# Tytus

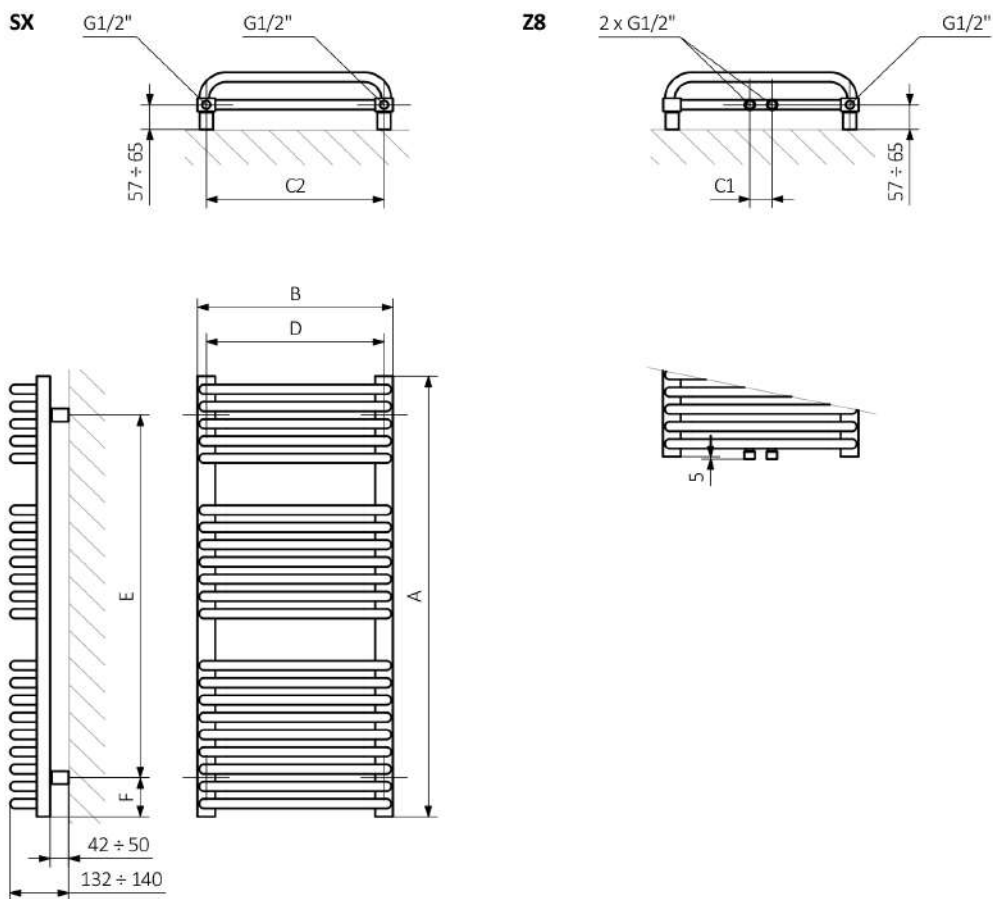

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

**Collettore :**



**Tubo :**

