

# Warp S



RAL 3020

# Warp S

## Predisposizioni


Elettrico



Acqua calda



## Dimensioni disponibili

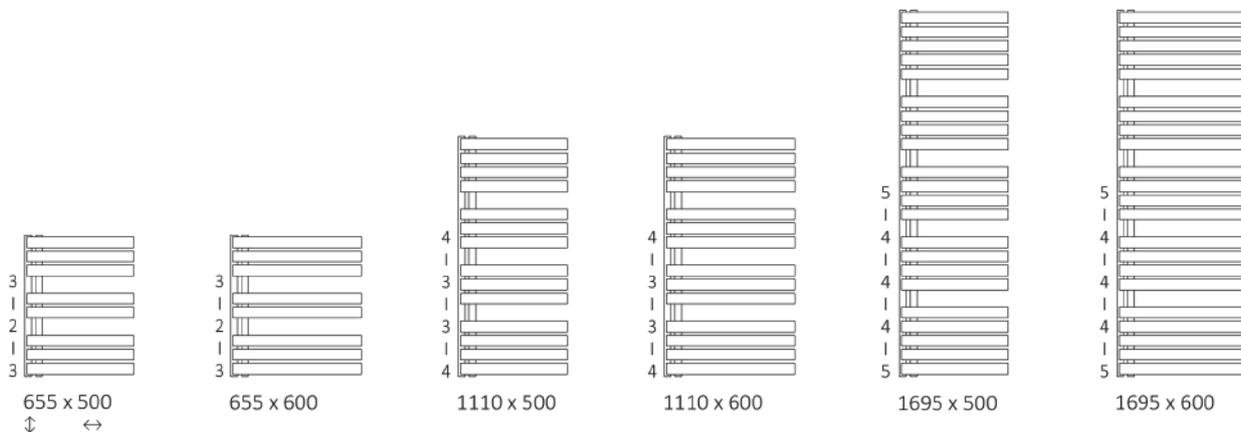


# Warp S

## Informazioni tecniche :

Pressione del lavoro : 600 kPa    Temperatura massima di lavoro : 95°C

| A ↕<br>[mm] | B ↔<br>[mm] | C1<br>[mm] | 756520°C<br>[W] | 554520°C<br>[W] | <br>[W] | D<br>[mm] | E<br>[mm] | F<br>[mm] | <br>[dm <sup>2</sup> ] | <br>[kg] |
|-------------|-------------|------------|-----------------|-----------------|--|-----------|-----------|-----------|---|---|
| 655         | 500         | 50         | 450             | 241             | 500  | 50        | 455       | 100       | 3,45  | 12,0  |
| 655         | 600         | 50         | 506             | 271             | 500  | 50        | 455       | 100       | 3,98  | 14,1  |
| 1110        | 500         | 50         | 764             | 406             | 800  | 50        | 910       | 100       | 5,99  | 20,6  |
| 1110        | 600         | 50         | 857             | 456             | 800  | 50        | 910       | 100       | 6,91  | 24,3  |
| 1695        | 500         | 50         | 1167            | 620             | 1200   | 50        | 1495      | 100       | 9,34  | 32,0  |
| 1695        | 600         | 50         | 1310            | 696             | 1200   | 50        | 1495      | 100       | 10,79   | 37,8  |

# Warp S

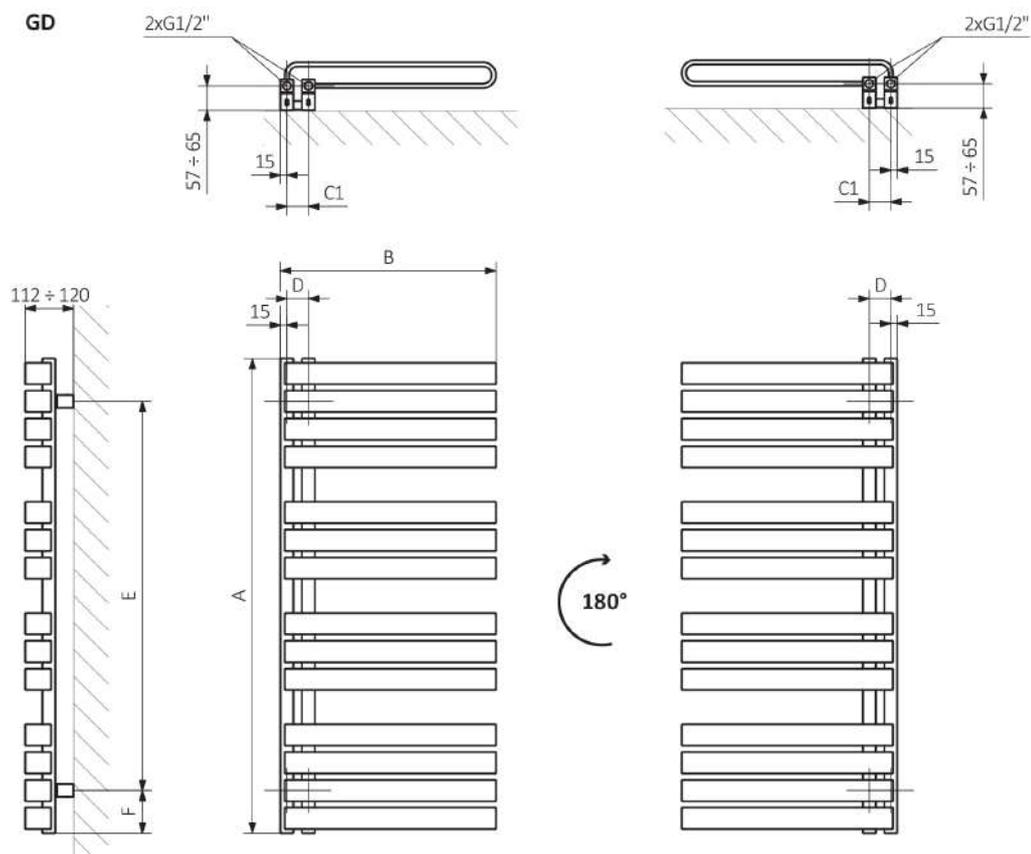

A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

**Collettore :**      **Profilo :**

