

Wind



COLORE
A SCELTA



Colore : Blueberry

Wind

Predisposizioni

Ad acqua calda




Elettrico



Misto



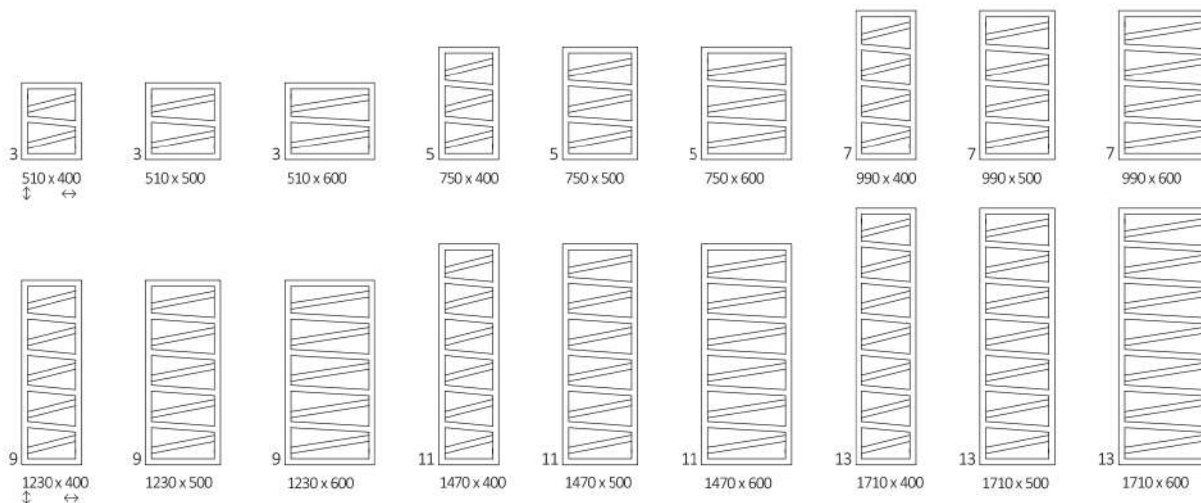


Dimensioni disponibili



Wind


Informazioni tecniche :

Pressione del lavoro : 800 kPa Temperatura massima di lavoro : 95°C



A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	756520°C [W]	554520°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
510	400	50	360	165	90	200	350	330	90	1,80	4,32
510	500	50	460	194	106	200	450	330	90	2,07	5,04
510	600	50	560	223	122	200	550	330	90	2,33	5,76
750	400	50	360	240	130	200	350	570	90	2,41	5,73
750	500	50	460	263	143	300	450	570	90	2,73	6,66
750	600	50	560	326	177	300	550	570	90	3,04	7,62
990	400	50	360	315	170	300	350	810	90	3,02	7,13
990	500	50	460	372	201	400	450	810	90	3,39	8,30
990	600	50	560	428	231	400	550	810	90	3,76	9,47
1230	400	50	360	386	208	400	350	1050	90	3,63	8,54
1230	500	50	460	456	245	500	450	1050	90	4,05	9,93
1230	600	50	560	525	283	500	550	1050	90	4,47	11,31
1470	400	50	360	462	248	500	350	1290	90	4,24	9,95
1470	500	50	460	546	293	500	450	1290	90	4,71	11,55
1470	600	50	560	629	337	600	550	1290	90	5,18	13,16
1710	400	50	360	537	287	500	350	1530	90	4,85	11,36
1710	500	50	460	634	339	600	450	1530	90	5,37	13,19
1710	600	50	560	730	391	800	550	1530	90	5,89	15,02

Wind


SX




ZX

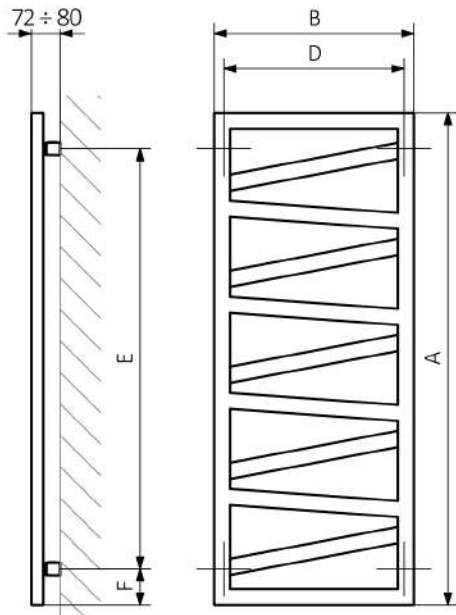

Z1

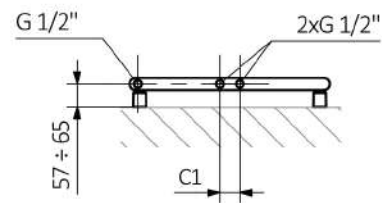


Z8

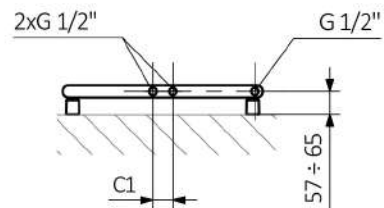


A - Altezza / B - Larghezza / C1-C5 - Distanza tra i raccordi / D - Interasse tra i tubi verticali / E - Distanza tra i punti di fissaggio / F - Distanza dell'asse del punto di fissaggio inferiore al bordo inferiore dello scaldasalviette

Collettore:



Collettore:



Tubo:

