


# Retro cuivré

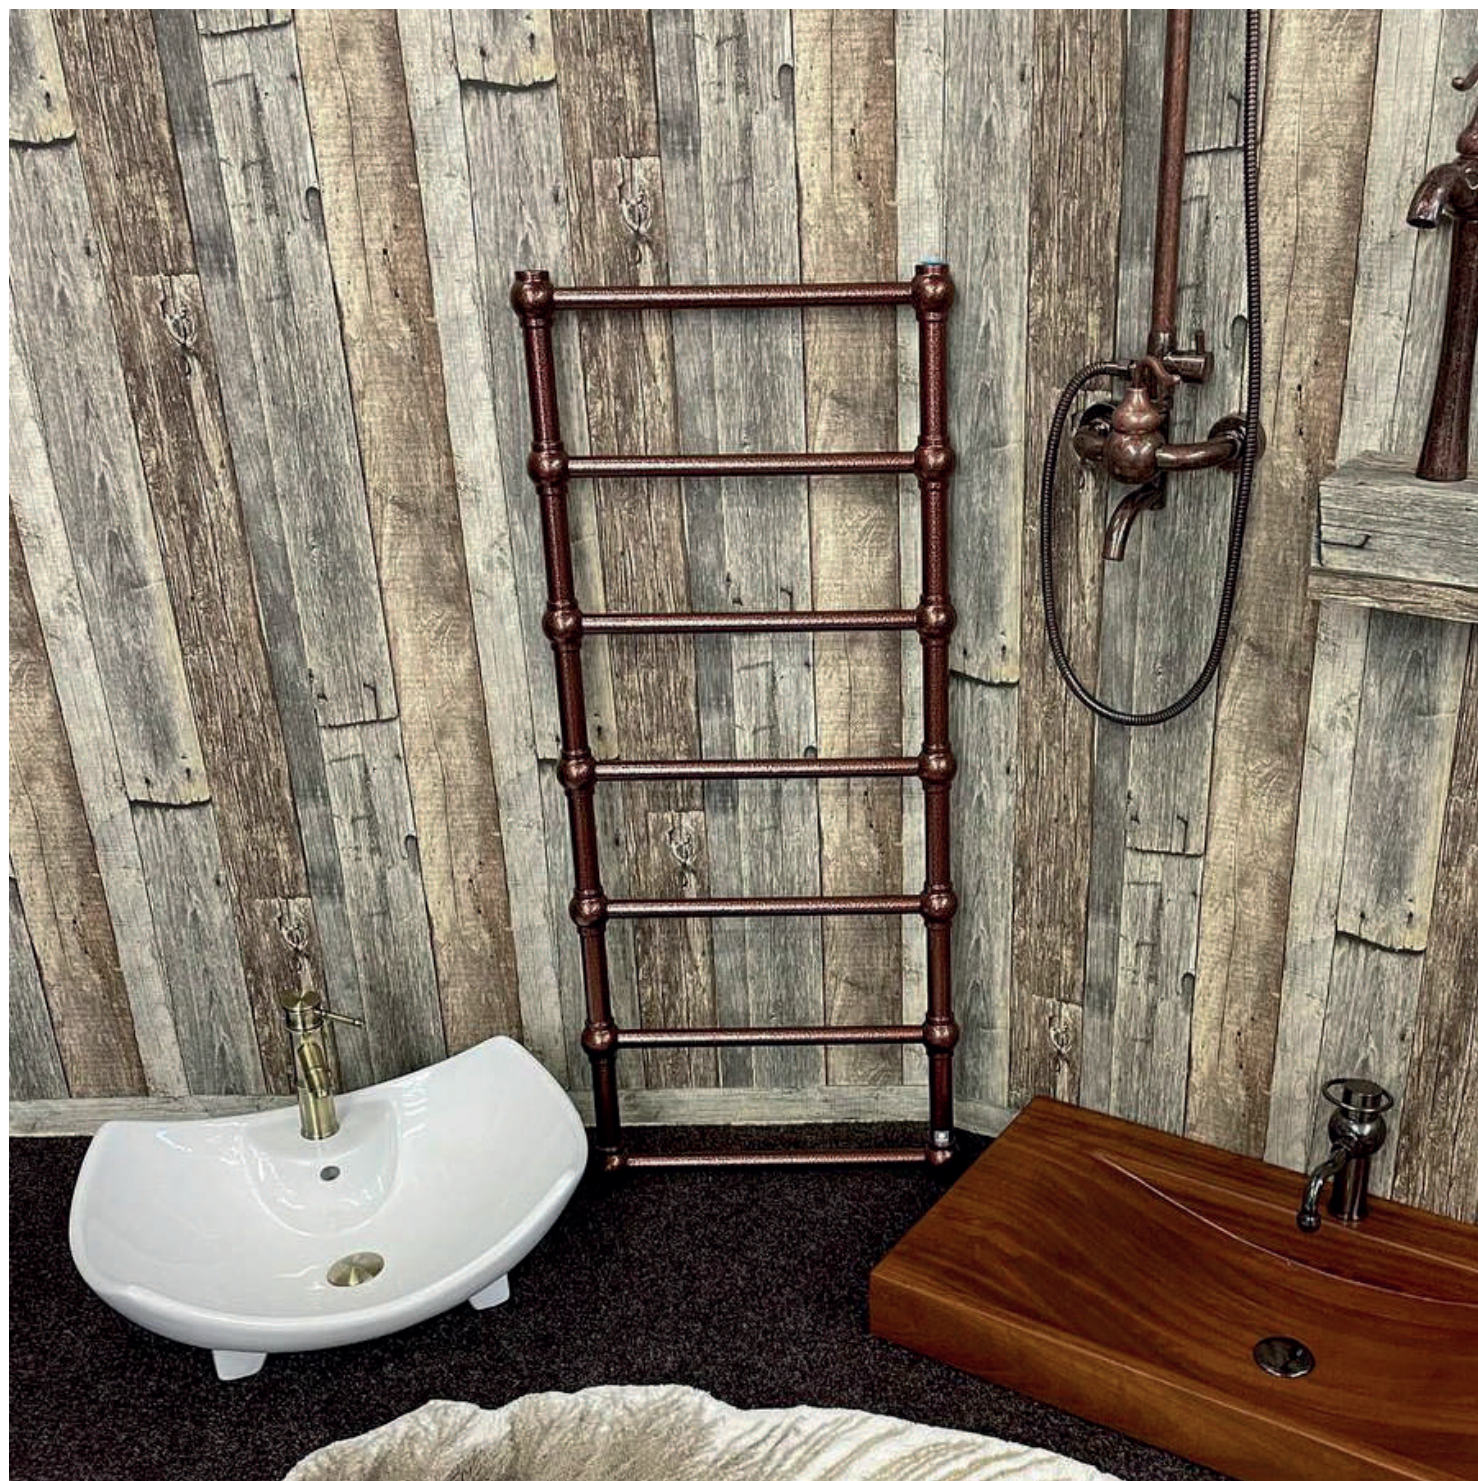

# Retro

---





## Raccordements

---

Eau Chaude



## Dimensions disponibles :

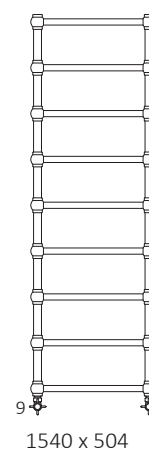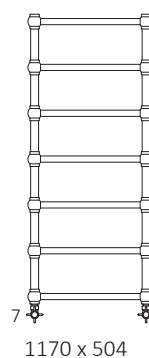



# Retro

## Données techniques :

Pression du travail : 1000 kPa Température maximale de travail : 95°C

| A ↕<br>[mm]                  | B ↔<br>[mm] | C2<br>[mm] | 75/65/20°C<br>[W] | 55/45/20°C<br>[W] | [W] | D<br>[mm] | E<br>[mm] | F<br>[mm] | [dm³] | [kg]  |
|------------------------------|-------------|------------|-------------------|-------------------|-----|-----------|-----------|-----------|-------|-------|
| <b>Peinture epoxy</b>        |             |            |                   |                   |     |           |           |           |       |       |
| 430                          | 504         | 450        | 115               | 63                | 100 | 450       | 370       | 30        | 1,05  | 5,57  |
| 800                          | 504         | 450        | 210               | 114               | 200 | 450       | 740       | 30        | 1,88  | 8,49  |
| 1170                         | 504         | 450        | 308               | 165               | 300 | 450       | 1110      | 30        | 2,71  | 11,40 |
| 1540                         | 504         | 450        | 405               | 216               | 400 | 450       | 1480      | 30        | 3,54  | 14,32 |
| <b>Revêtement galvanique</b> |             |            |                   |                   |     |           |           |           |       |       |
| 430                          | 504         | 450        | 81                | 44                | 100 | 450       | 370       | 30        | 1,05  | 5,48  |
| 800                          | 504         | 450        | 147               | 80                | 100 | 450       | 740       | 30        | 1,88  | 8,33  |
| 1170                         | 504         | 450        | 216               | 116               | 200 | 450       | 1110      | 30        | 2,71  | 11,19 |
| 1540                         | 504         | 450        | 284               | 151               | 300 | 450       | 1480      | 30        | 3,54  | 14,05 |

# Ensemble de réglage angulaire STAR

## ROBINETTERIE INCLUSE



- Kit raccord compatible pour une arrivée et un départ au mur
- 2 vannes de réglage angulaire chromées au design élégant et intemporel
- 2 adaptateurs cuivre Ø15
- 2 adaptateurs multicouche 16x2

## Données techniques :

| Taille               | Couleur |
|----------------------|---------|
| GZ 1/2" - Ø16x2; Ø15 | Chrome  |

