

Dexter Pro



RAL3020

Dexter Pro

Raccordements

Chauffage central




Électrique



Mixte



Dimensions disponibles

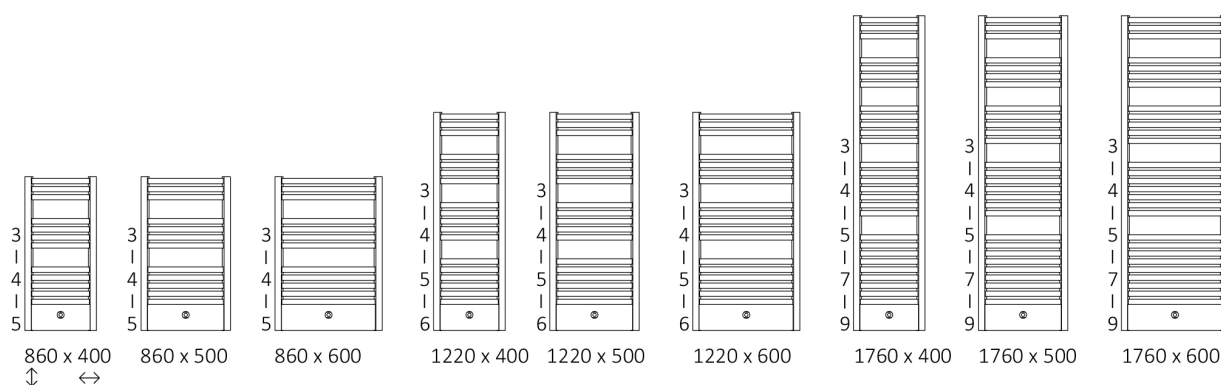

Dexter Pro


Données techniques

Pression du travail : 0,8 MPa Température maximale de travail : 95°C




A ↕	B ↔	C1 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
860	400	50	326	173	300	350	680	90	2,64	7,43
860	500	50	408	216	400	450	680	90	2,90	8,63
860	600	50	488	259	600	550	680	90	3,17	9,83
1220	400	50	429	232	400	350	1040	90	3,75	10,25
1220	500	50	536	289	600	450	1040	90	4,13	11,97
1220	600	50	645	348	600	550	1040	90	4,51	13,68
1760	400	50	601	323	600	350	1580	90	5,49	14,76
1760	500	50	751	403	800	450	1580	90	6,05	17,33
1760	600	50	900	483	1000	550	1580	90	6,62	19,91

Dexter Pro

ZX

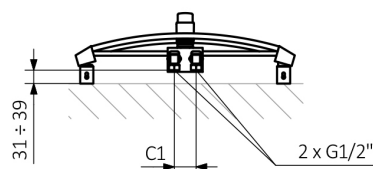

Z8

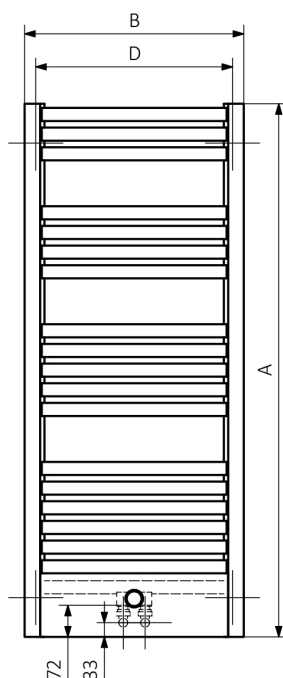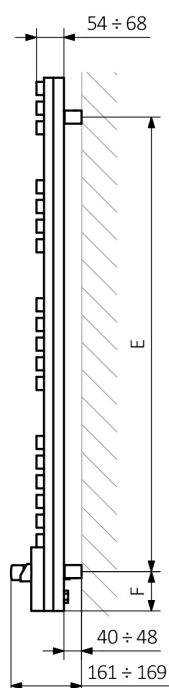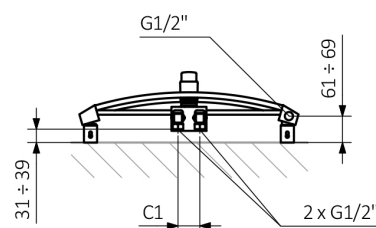

A — hauteur B — largeur C1-C5 — écartement des raccords D — écartement des consoles en horizontal E — écartement des consoles en vertical F — distance de l'axe de la console inférieure au bord inférieur du collecteur

Collecteur :

Profil :

