

Kioto



RAL 4010

Kioto

Raccordements

Chauffage central








Électrique



Mixte



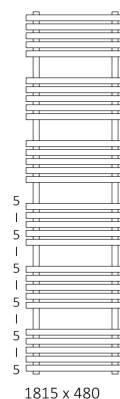


Dimensions disponibles




Kioto

Données techniques

Pression du travail : 0,8 MPa Température maximale de travail : 95°C

A ↓	B ↔	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
555	480	390	324	176	300	390	375	90	1,97	6,84
870	480	390	476	255	400	390	690	90	3,01	10,33
1185	480	390	628	336	600	390	1005	90	4,05	13,82
1500	480	390	780	415	800	390	1320	90	5,09	17,31
1815	480	390	932	496	1000	390	1635	90	6,13	20,80

Kioto

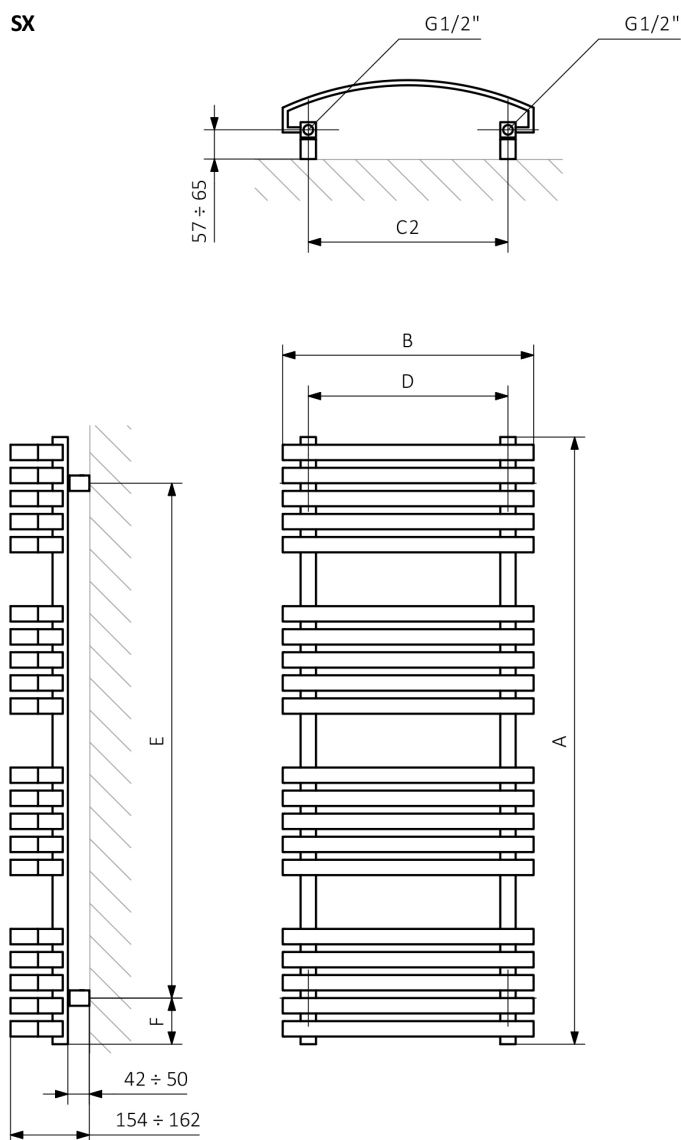

A – hauteur B – largeur C1-C5 – écartement des raccordements D – écartement des consoles en horizontal E – écartement des consoles en vertical F – distance de l'axe de la console inférieure au bord inférieur du collecteur

Collecteur :

Profil :

