

Lima



Raccordements


Chauffage central



Mixte



Dimensions disponibles :

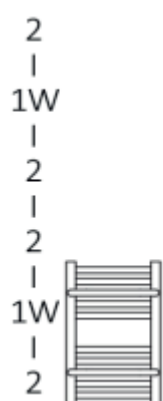


500x300




820x300



1140x300

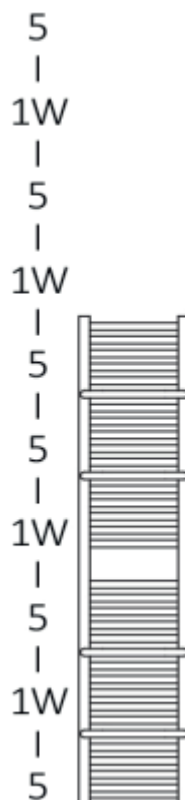

1460x300

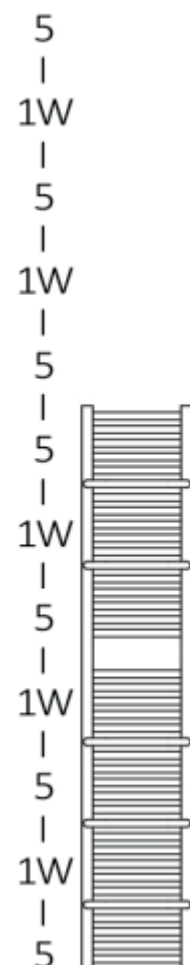




1700x300

Données techniques




Pression du travail : 1000 kPa

Température maximale de travail : 95°C


A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
Peinture epoxy										
500	300	50	144	79	100	270	320	90	1,50	3,06
820	300	50	244	132	300	270	640	90	2,53	5,14
1140	300	50	345	185	400	270	960	90	3,57	7,22
1460	300	50	449	240	500	270	1280	90	4,66	9,42
1700	300	50	527	280	500	270	1520	90	5,47	11,04

Pression du travail : 1000 kPa

Température maximale de travail : 95°C


A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
Revêtement galvanique										
500	300	50	101	51	100	270	320	90	1,50	2,94
820	300	50	171	87	200	270	640	90	2,53	4,94
1140	300	50	242	123	300	270	960	90	3,57	6,94
1460	300	50	314	160	300	270	1280	90	4,66	9,06
1700	300	50	369	188	400	270	1520	90	5,47	10,62

Dessin technique :

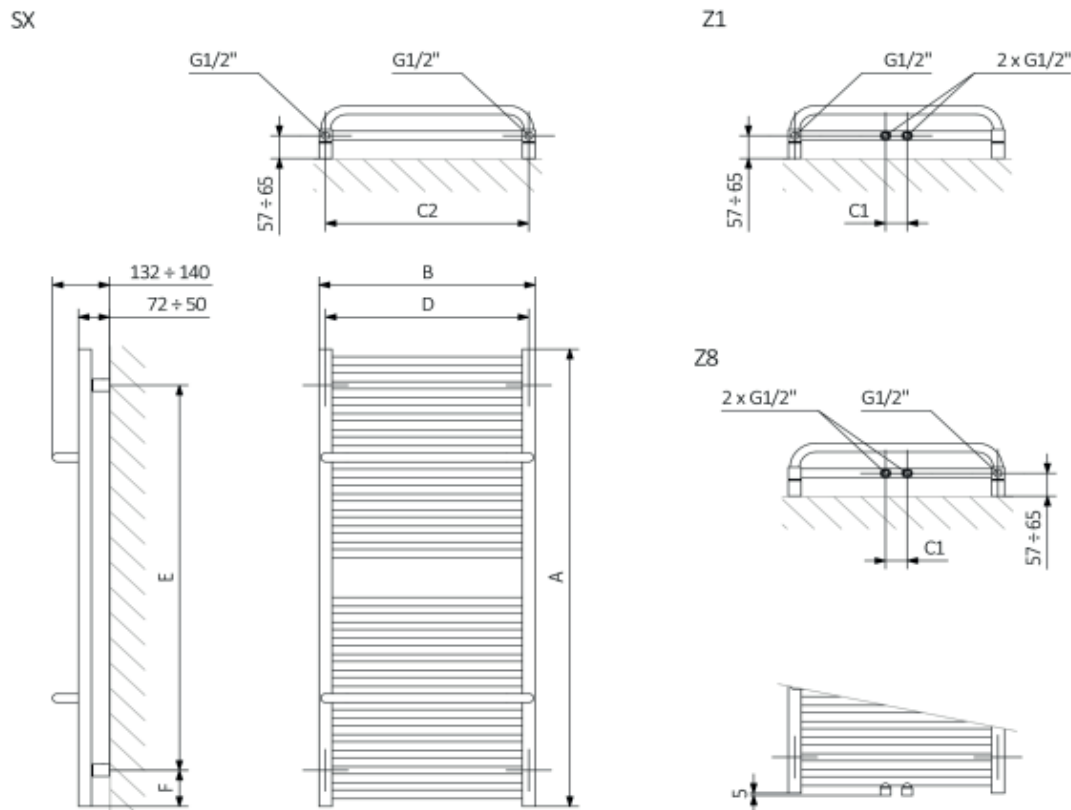

A - hauteur B - largeur C1-C5 - écartement des raccords D - écartement des consoles en horizontal E - écartement des consoles en vertical F - distance de l'axe de la console inférieure au bord inférieur du collecteur

Collecteur :



Tube :

