

# Quad Slim

---



# Quad Slim

## Raccordements

Chauffage central







Électrique



Mixte



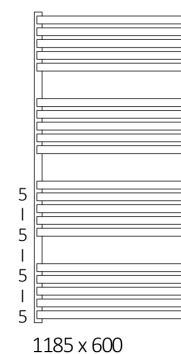


## Dimensions disponibles




# Quad Slim

## Données techniques

Pression du travail : 1,0 MPa Température maximale de travail : 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
870	450	50	420	409	217	400	420	690	90	2,60	8,50
870	600	50	570	559	296	600	570	690	90	3,03	10,43
1185	450	50	420	537	278	600	420	1005	90	3,50	11,36
1185	600	50	570	733	379	800	570	1005	90	4,07	13,93

# Quad Slim

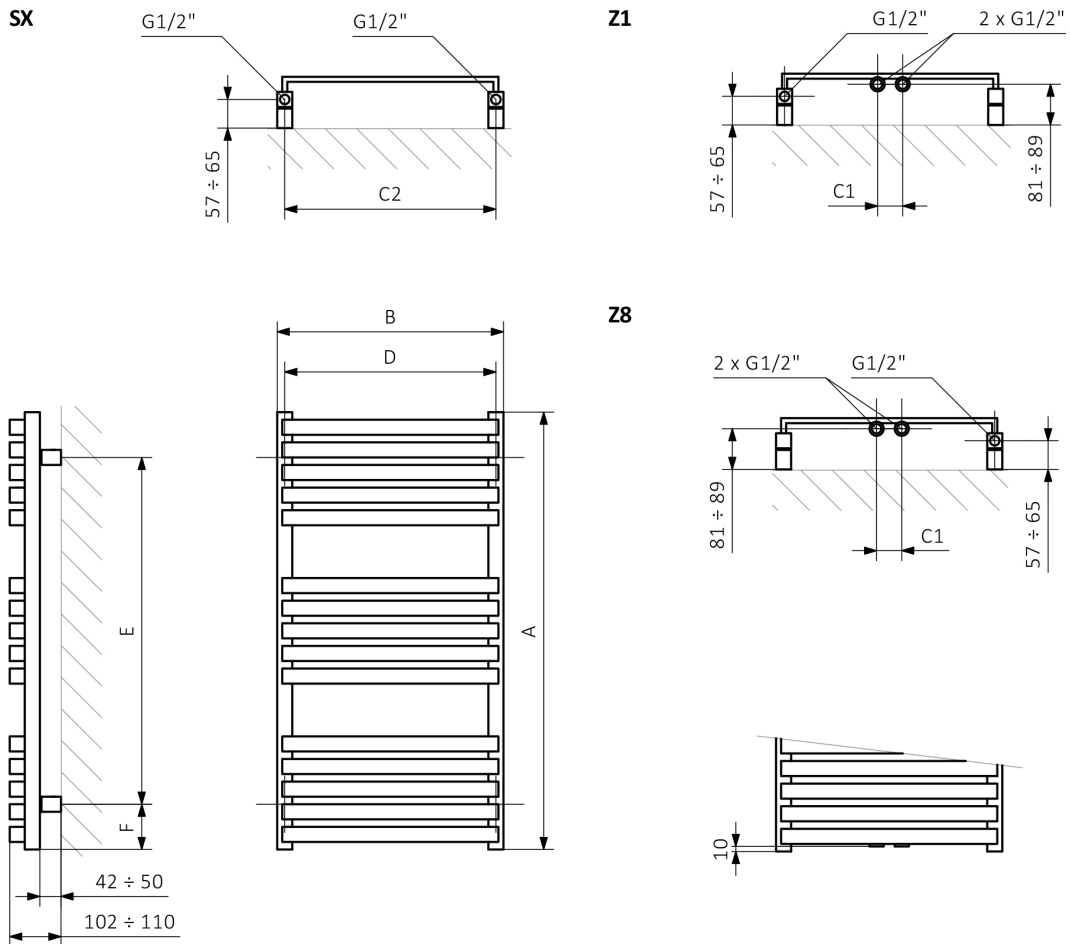

A – hauteur B – largeur C1-C5 – écartement des raccords D – écartement des consoles en horizontal E – écartement des consoles en vertical F – distance de l'axe de la console inférieure au bord inférieur du collecteur

**Collecteur :** **Profil :**

