


Ribbon HWS

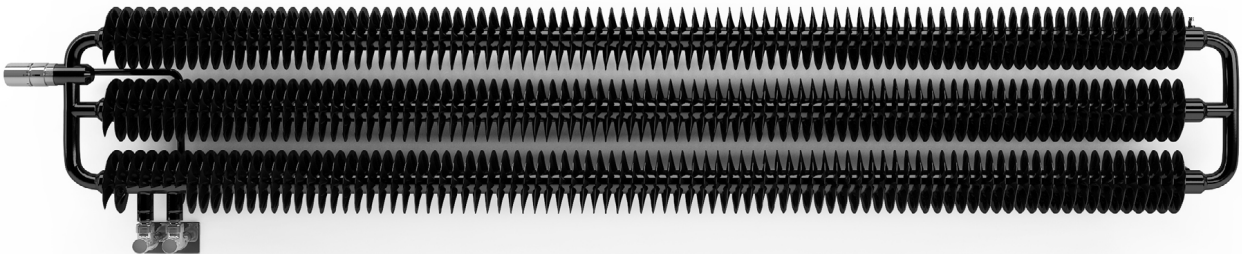

Ral : 9005

Ribbon HWS

Raccordements


Chauffage central




Dimensions disponibles




290 x 1540
⇕ ⇔




290 x 1740




290 x 1940




390 x 1540
⇕ ⇔




390 x 1740




390 x 1940



490 x 1540
⇕ ⇔



490 x 1740





490 x 1940

Ribbon HWS


Données techniques

Pression de travail : 1.0 MPa Temperature maximale de travail : 95°C


A ↕	B ↔	C1 [mm]	75 65 20°C [W]	55 45 20°C [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
290	1540	50	802	411	1400	200	43	2,90	22,89
290	1740	50	906	464	1600	200	43	3,27	25,87
290	1940	50	1010	517	1800	200	43	3,64	28,86
390	1540	50	990	504	1400	300	43	3,78	29,99
390	1740	50	1119	570	1600	300	43	4,26	33,97
390	1940	50	1248	636	1800	300	43	4,75	37,95
490	1540	50	1329	670	1400	400	43	4,65	37,10
490	1740	50	1501	757	1600	400	43	5,26	42,07
490	1940	50	1673	844	1800	400	43	5,87	47,05

Ribbon HWS


YP

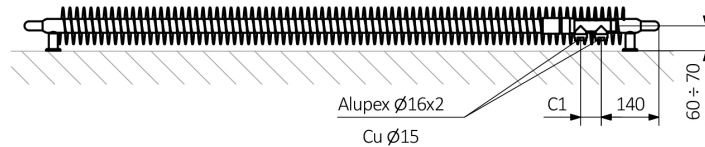


YL

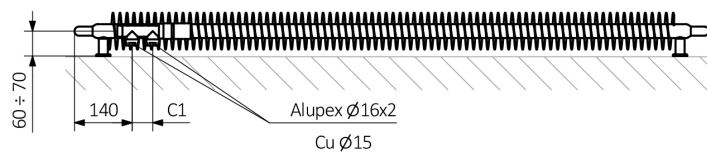

VP

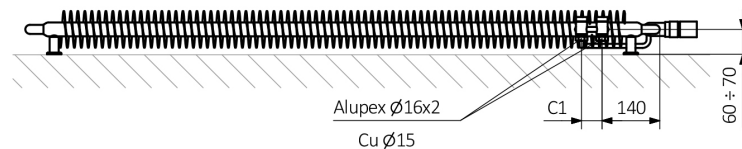


VL

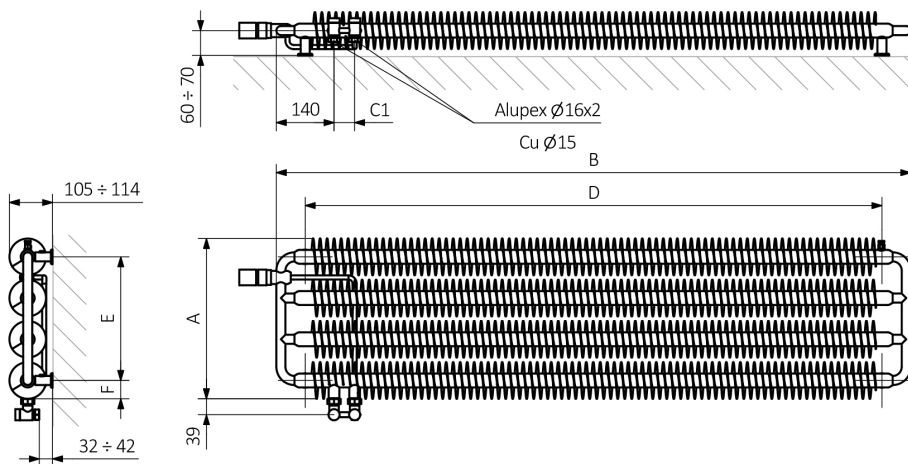

A - Hauteur / B - Largeur / C1-C5 - Ecartement des raccords / D - Ecartement des consoles en horizontal / E - Ecartement des consoles en vertical / F - Distance de l'axe de la console inférieure au bord inférieur du collecteur

Collecteur :



Profil :

