


# Ribbon T

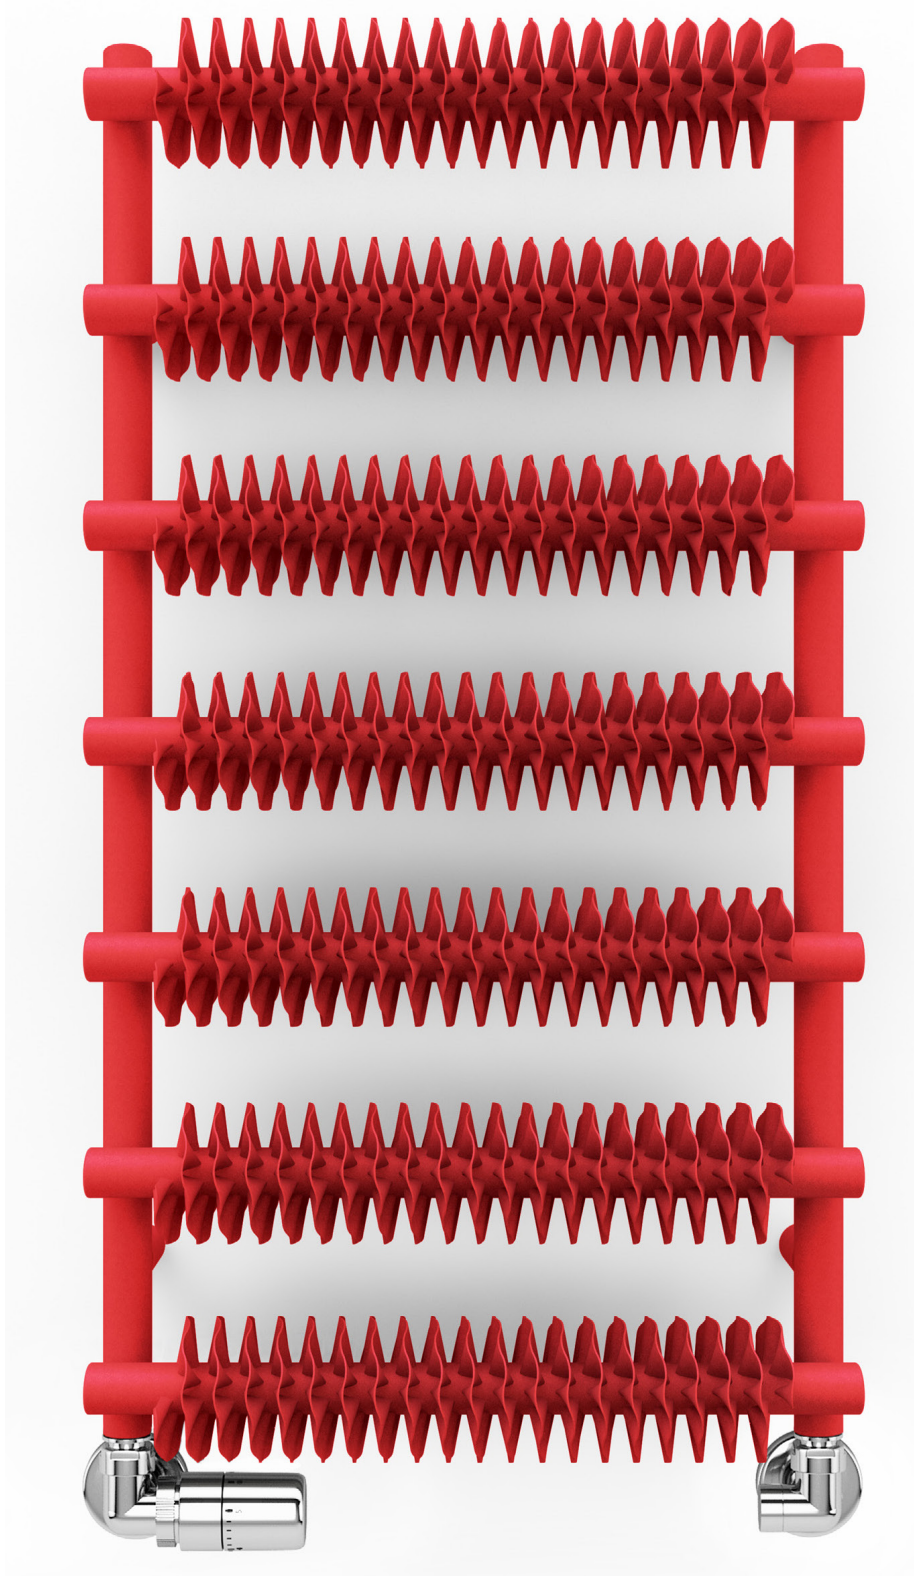

RAL ; 3020

# Ribbon T

## Raccordements

Chauffage central




Electrique



Mixte



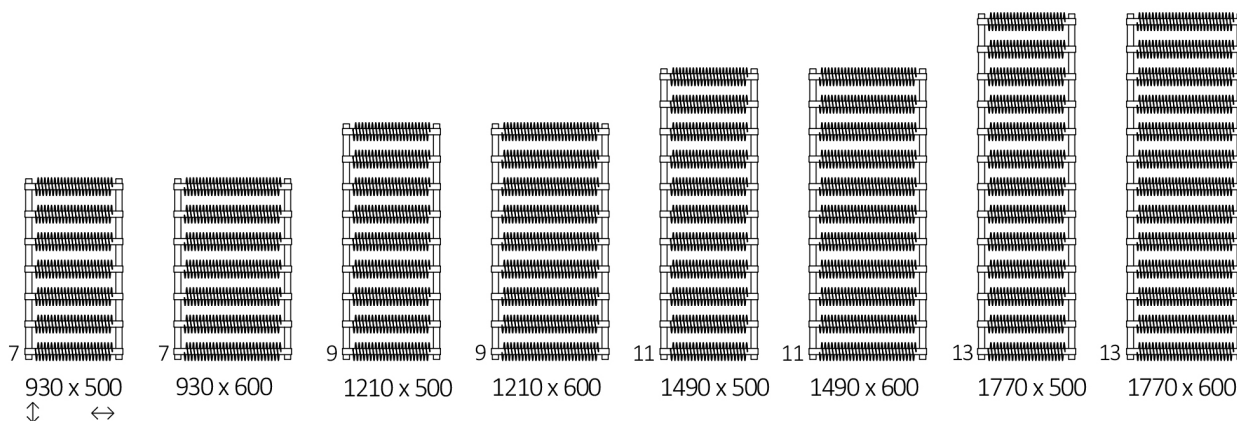


## Dimensions disponibles



# Ribbon T


## Données techniques

Pression de travail : 1000 kPa    Temperature maximale de travail : 95°C

A ↓ [mm]	B ↔ [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
930	500	460	625	332	600	460	715	107,5	3,02	16,9
930	600	560	766	409	800	560	715	107,5	3,45	20,5
1210	500	460	803	424	800	460	995	107,5	3,91	21,7
1210	600	560	968	510	1000	560	995	107,5	4,46	26,5
1490	500	460	981	515	1000	460	1275	107,5	4,79	26,6
1490	600	560	1171	608	1200	560	1275	107,5	5,47	32,4
1770	500	460	1160	605	1200	460	1555	107,5	5,68	31,4
1770	600	560	1373	707	1500	560	1555	107,5	6,48	38,2

# Ribbon T

SX

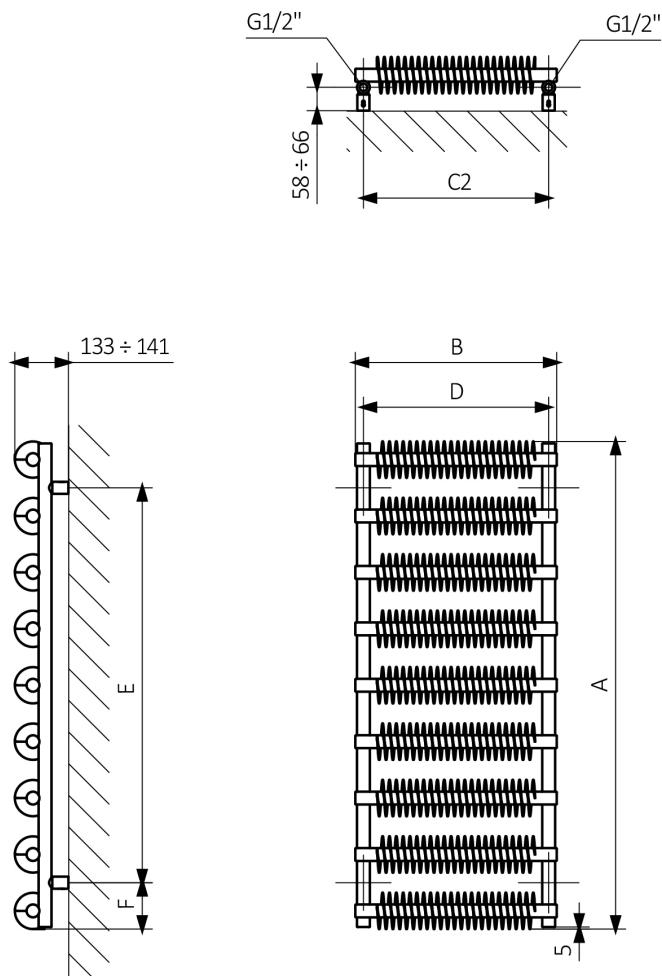

A - Hauteur / B - Largeur / C1-C5 - Ecartement des raccordements / D - Ecartement des consoles en horizontal / E - Ecartement des consoles en vertical / F - Distance de l'axe de la console inférieure au bord inférieur du collecteur

Collecteur :



Profil :

