

Vivo



RAL 3020

Vivo

Raccordements

Chauffage central




Électrique



Mixte



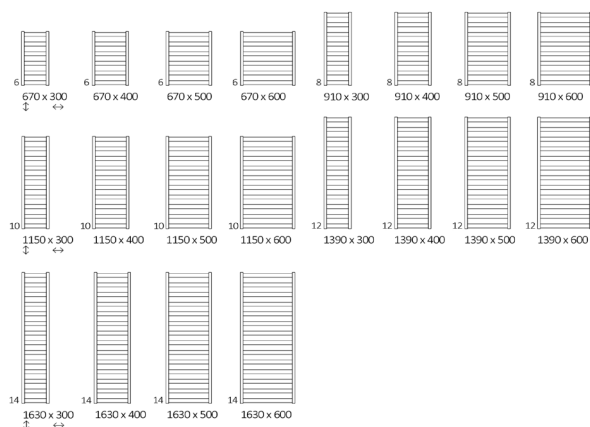


Dimensions disponibles




Vivo

Données techniques

Pression du travail : 600 kPa Température maximale de travail : 95°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C3 [mm] | 756520°C [W] | 554520°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm²] |  [kg] |
|-----------------------|-------------|------------|------------|-----------------|-----------------|--|-----------|-----------|-----------|--|---|
| Peinture epoxy | | | | | | | | | | | |
| 670 | 300 | 50 | 270 | 185 | 100 | 200 | 270 | 490 | 90 | 1,44 | 6,72 |
| 670 | 400 | 50 | 370 | 230 | 124 | 200 | 370 | 490 | 90 | 1,63 | 8,40 |
| 670 | 500 | 50 | 470 | 275 | 148 | 300 | 470 | 490 | 90 | 1,83 | 10,06 |
| 670 | 600 | 50 | 570 | 320 | 172 | 300 | 570 | 490 | 90 | 2,03 | 11,74 |
| 910 | 300 | 50 | 270 | 240 | 130 | 200 | 270 | 730 | 90 | 1,94 | 8,81 |
| 910 | 400 | 50 | 370 | 295 | 159 | 300 | 370 | 730 | 90 | 2,21 | 11,02 |
| 910 | 500 | 50 | 470 | 350 | 189 | 400 | 470 | 730 | 90 | 2,47 | 13,22 |
| 910 | 600 | 50 | 570 | 405 | 218 | 400 | 570 | 730 | 90 | 2,73 | 15,43 |
| 1150 | 300 | 50 | 270 | 300 | 162 | 300 | 270 | 970 | 90 | 2,45 | 10,91 |
| 1150 | 400 | 50 | 370 | 366 | 197 | 400 | 370 | 970 | 90 | 2,78 | 13,65 |
| 1150 | 500 | 50 | 470 | 433 | 233 | 400 | 470 | 970 | 90 | 3,11 | 16,39 |
| 1150 | 600 | 50 | 570 | 501 | 269 | 500 | 570 | 970 | 90 | 3,44 | 19,12 |
| 1390 | 300 | 50 | 270 | 356 | 192 | 400 | 270 | 1210 | 90 | 2,96 | 13,00 |
| 1390 | 400 | 50 | 370 | 434 | 234 | 400 | 370 | 1210 | 90 | 3,35 | 16,28 |
| 1390 | 500 | 50 | 470 | 512 | 275 | 500 | 470 | 1210 | 90 | 3,75 | 19,55 |
| 1390 | 600 | 50 | 570 | 590 | 316 | 600 | 570 | 1210 | 90 | 4,14 | 22,82 |
| 1630 | 300 | 50 | 270 | 414 | 223 | 400 | 270 | 1450 | 90 | 3,46 | 15,10 |
| 1630 | 400 | 50 | 370 | 503 | 270 | 500 | 370 | 1450 | 90 | 3,92 | 18,91 |
| 1630 | 500 | 50 | 470 | 592 | 318 | 600 | 470 | 1450 | 90 | 4,38 | 22,71 |
| 1630 | 600 | 50 | 570 | 681 | 365 | 800 | 570 | 1450 | 90 | 4,84 | 26,52 |
| Revêtement galvanique | | | | | | | | | | | |
| 670 | 300 | 50 | 270 | 130 | 70 | 100 | 270 | 490 | 90 | 1,44 | 6,59 |
| 670 | 400 | 50 | 370 | 161 | 87 | 200 | 370 | 490 | 90 | 1,63 | 8,24 |
| 670 | 500 | 50 | 470 | 193 | 104 | 200 | 470 | 490 | 90 | 1,83 | 9,88 |
| 670 | 600 | 50 | 570 | 224 | 120 | 200 | 570 | 490 | 90 | 2,03 | 11,53 |
| 910 | 300 | 50 | 270 | 168 | 91 | 200 | 270 | 730 | 90 | 1,94 | 8,64 |
| 910 | 400 | 50 | 370 | 207 | 111 | 200 | 370 | 730 | 90 | 2,21 | 10,81 |
| 910 | 500 | 50 | 470 | 245 | 132 | 300 | 470 | 730 | 90 | 2,47 | 12,98 |
| 910 | 600 | 50 | 570 | 284 | 153 | 300 | 570 | 730 | 90 | 2,73 | 15,15 |
| 1150 | 300 | 50 | 270 | 210 | 113 | 200 | 270 | 970 | 90 | 2,45 | 10,69 |
| 1150 | 400 | 50 | 370 | 256 | 138 | 300 | 370 | 970 | 90 | 2,78 | 13,39 |
| 1150 | 500 | 50 | 470 | 303 | 163 | 300 | 470 | 970 | 90 | 3,11 | 16,08 |
| 1150 | 600 | 50 | 570 | 351 | 188 | 400 | 570 | 970 | 90 | 3,44 | 18,77 |
| 1390 | 300 | 50 | 270 | 249 | 134 | 300 | 270 | 1210 | 90 | 2,96 | 12,74 |
| 1390 | 400 | 50 | 370 | 304 | 164 | 300 | 370 | 1210 | 90 | 3,35 | 15,97 |
| 1390 | 500 | 50 | 470 | 358 | 193 | 400 | 470 | 1210 | 90 | 3,75 | 19,18 |
| 1390 | 600 | 50 | 570 | 413 | 221 | 400 | 570 | 1210 | 90 | 4,14 | 22,40 |
| 1630 | 300 | 50 | 270 | 290 | 156 | 300 | 270 | 1450 | 90 | 3,46 | 14,80 |
| 1630 | 400 | 50 | 370 | 352 | 189 | 400 | 370 | 1450 | 90 | 3,92 | 18,54 |
| 1630 | 500 | 50 | 470 | 414 | 223 | 400 | 470 | 1450 | 90 | 4,38 | 22,28 |
| 1630 | 600 | 50 | 570 | 477 | 256 | 500 | 570 | 1450 | 90 | 4,84 | 26,02 |

Vivo

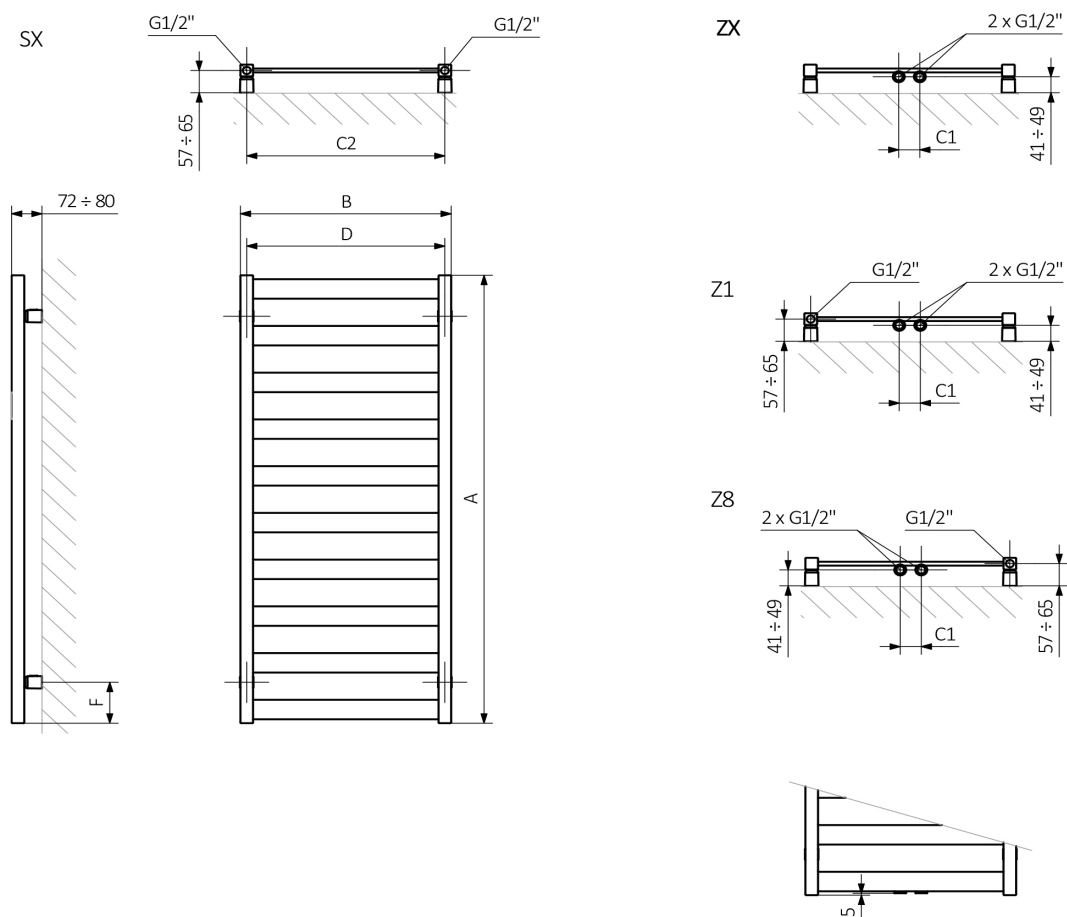

A – hauteur B – largeur C1-C5 – écartement des raccords D – écartement des consoles en horizontal
E – écartement des consoles en vertical F – distance de l'axe de la console inférieure au bord inférieur du collecteur

Collecteur :



Tube :

