


Triga M



Anschlusstypen


Warmwasserbetrieb

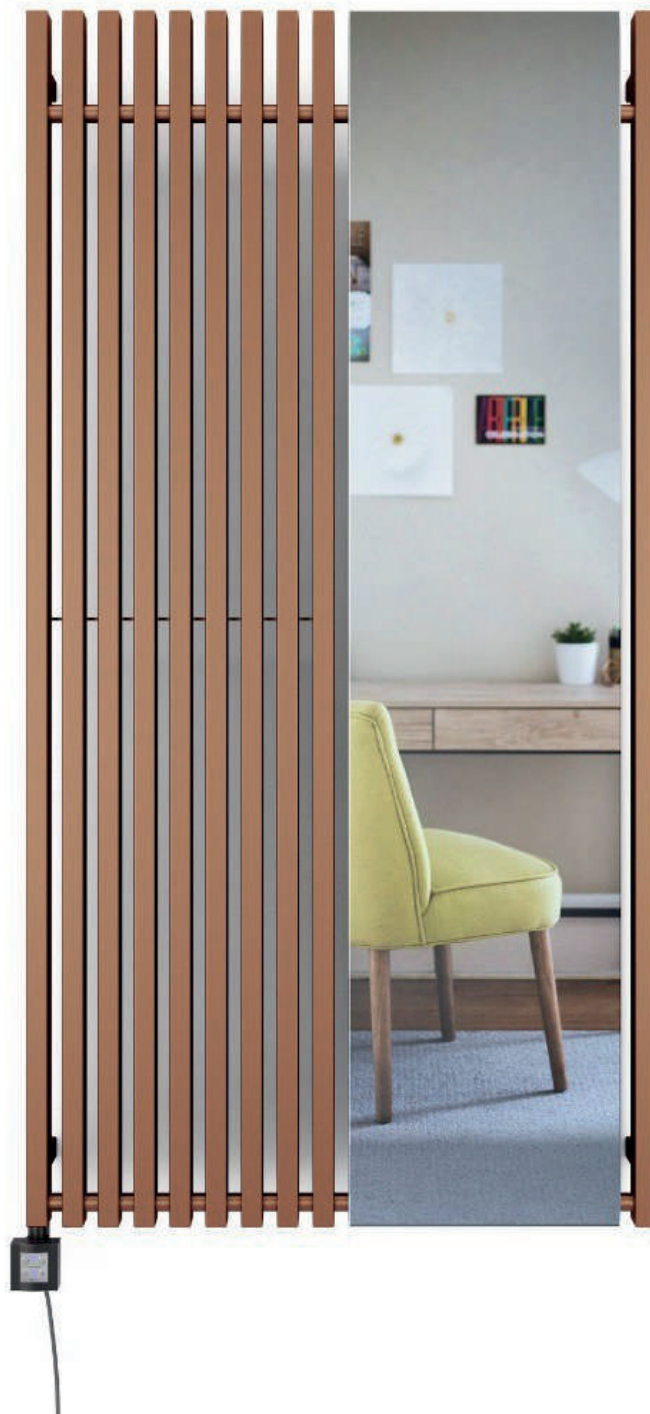

Mischbetrieb



Verfügbare Größen:

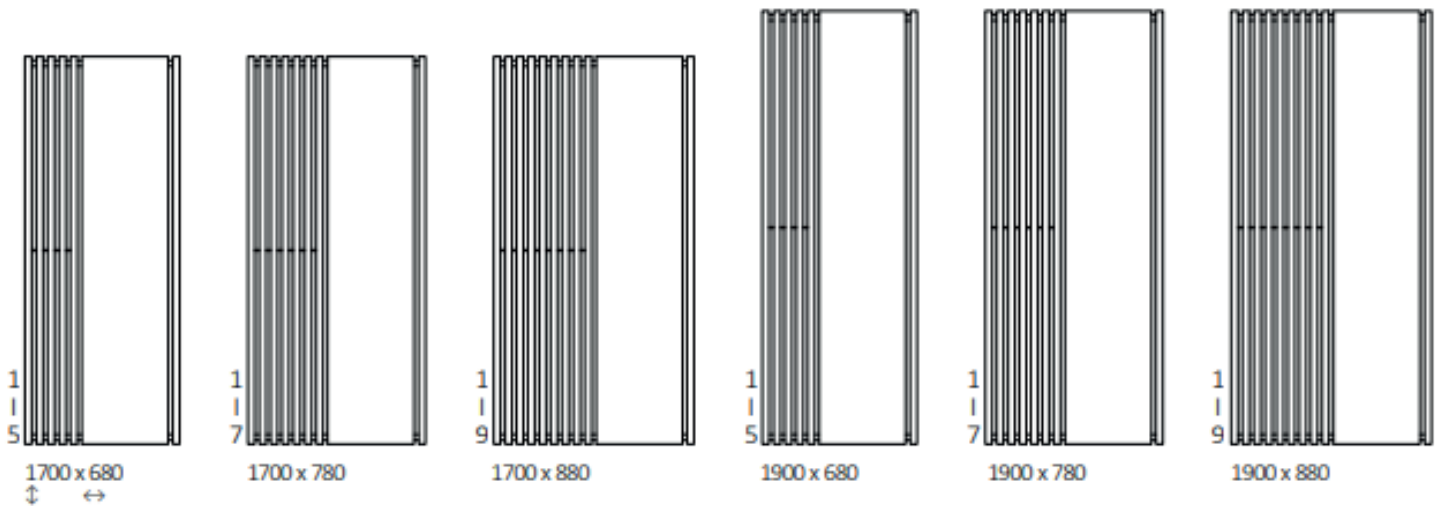

Technische Daten:


Betriebsdruck: 800 kPa

Maximale Betriebstemperatur: 95°C


A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	⊗ [W]	D [mm]	E [mm]	F [mm]	H [dm³]	⏚ [kg]
1700	680	50	646	332	600	650	1520	90	10,55	29,21
1700	780	50	850	437	800	750	1520	90	13,97	34,89
1700	880	50	1074	552	1000	850	1520	90	17,39	40,56
1900	680	50	721	369	800	650	1720	90	11,75	32,49
1900	780	50	961	492	1000	750	1720	90	15,57	38,81
1900	880	50	1202	615	1200	850	1720	90	19,39	45,12

Technische Zeichnung:

SX

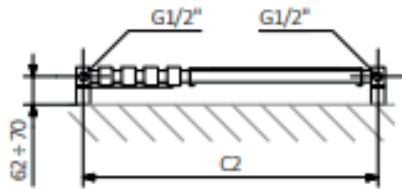


YL

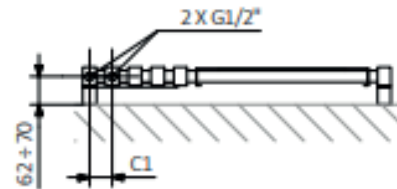

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand
F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Kollektor:



Rohr:

