


Domi

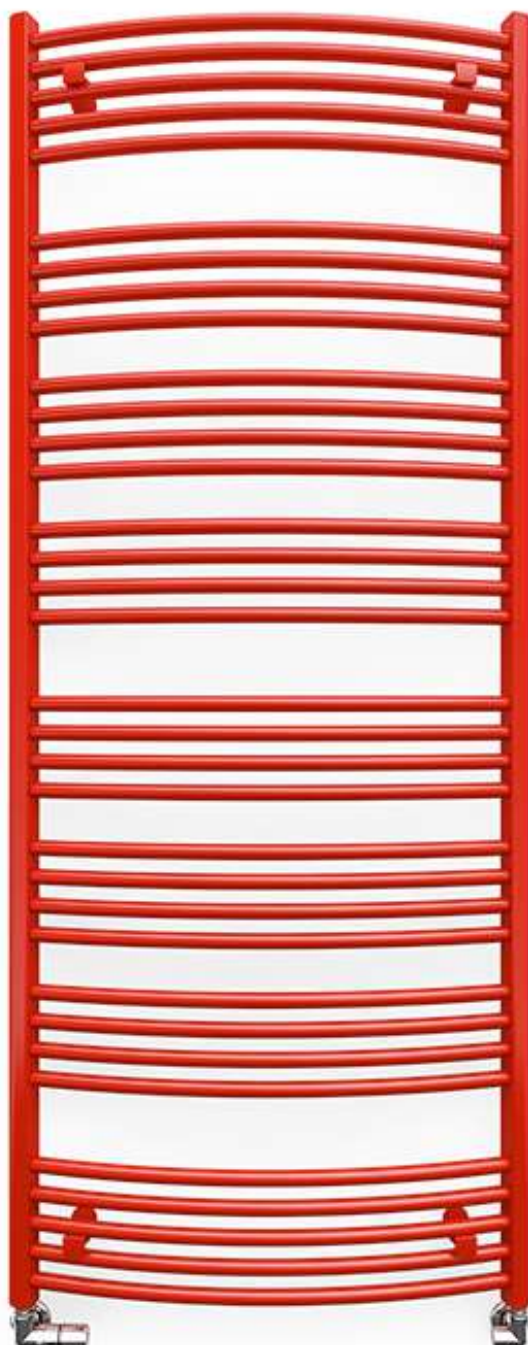

Domi

Anschlusstypen


Warmwasserbetrieb




Elektrobetrieb



Mischbetrieb

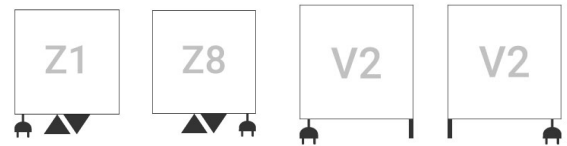

Verfügbare Größen

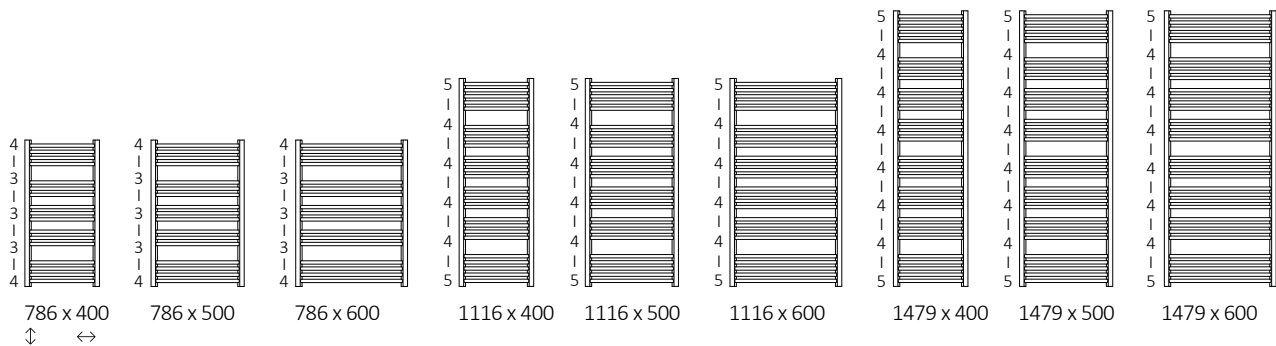


Technische Daten

Betriebsdruck: 1000 kPa Maximale Betriebstemperatur: 95°C

A ↑ [mm]	B ↔ [mm]	C2 [mm]	散热器 [W]	散热器 [W]	散热器 [W]	D [mm]	E [mm]	F [mm]	H [mm]	散热器 [kg]	Artikelnummer <small>Handtuchheizkörper S. 5</small>
Pulverlack											
786	400	370	296	161	300	240	626	80	2,13	4,77	WGD0M078040
786	500	470	369	199	400	340	626	80	2,54	5,69	WGD0M078050
786	600	570	435	235	400	440	626	80	2,86	6,61	WGD0M078060
1116	400	370	413	222	400	240	956	80	3,27	7,09	WGD0M111040
1116	500	470	513	274	600	340	956	80	3,76	8,49	WGD0M111050
1116	600	570	620	331	600	440	956	80	4,25	9,89	WGD0M111060
1479	400	370	533	284	600	240	1319	80	4,31	9,28	WGD0M147040
1479	500	470	663	346	600	340	1319	80	4,95	11,12	WGD0M147050
1479	600	570	800	425	800	440	1319	80	5,59	12,95	WGD0M147060
Galvanische Oberfläche											
786	400	370	207	106	200	240	626	80	2,13	4,58	WGD0M078040
786	500	470	258	132	300	340	626	80	2,54	5,45	WGD0M078050
786	600	570	305	155	300	440	626	80	2,86	6,33	WGD0M078060
1116	400	370	289	147	300	240	956	80	3,27	6,79	WGD0M111040
1116	500	470	359	183	400	340	956	80	3,76	8,14	WGD0M111050
1116	600	570	434	221	400	440	956	80	4,25	9,48	WGD0M111060
1479	400	370	373	190	400	240	1319	80	4,31	8,90	WGD0M147040
1479	500	470	464	237	400	340	1319	80	4,95	10,66	WGD0M147050
1479	600	570	560	286	600	440	1319	80	5,59	12,42	WGD0M147060

Domi

Technische Zeichnung:

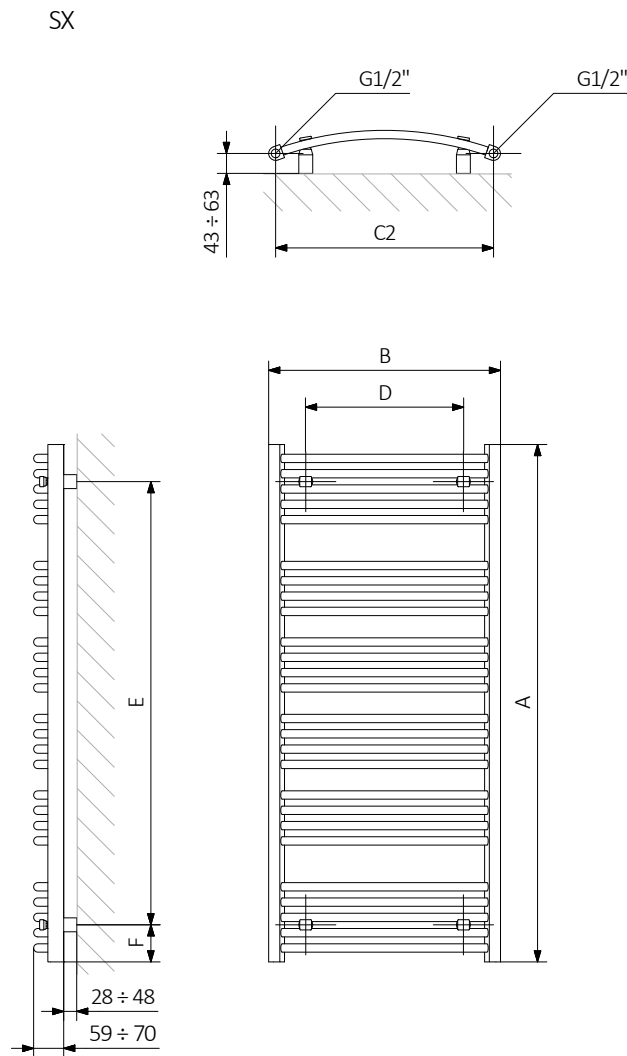

A – Höhe B – Breite C1-C5 – Anschlussabstand D – horizontaler Wandhalterungsabstand E – Vertikaler Wandhalterungsabstand
F – Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Kollektor :

Rohr :

