

Stand




Standard Anschlussarten:

Warmwasserbetrieb



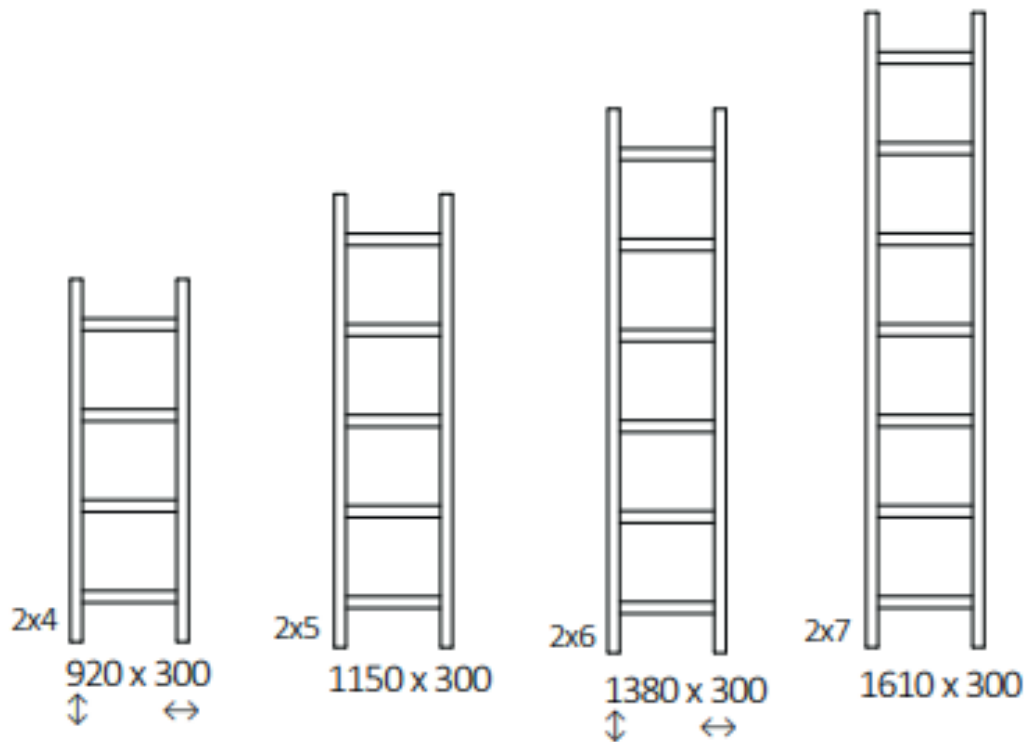


Verfügbare Größen



Technische Daten:



Betriebsdruck: 800 kPa

Maximale Betriebstemperatur: 95°C

A ↕ [mm]	B ↔ [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
920	300	270	383	207	400	270	690	115	5,29	8,81
1150	300	270	480	259	500	270	920	115	6,56	10,86
1380	300	270	577	310	600	270	1150	115	7,82	12,90
1610	300	270	674	362	800	270	1380	115	9,08	14,96


Technische Zeichnung:

SX

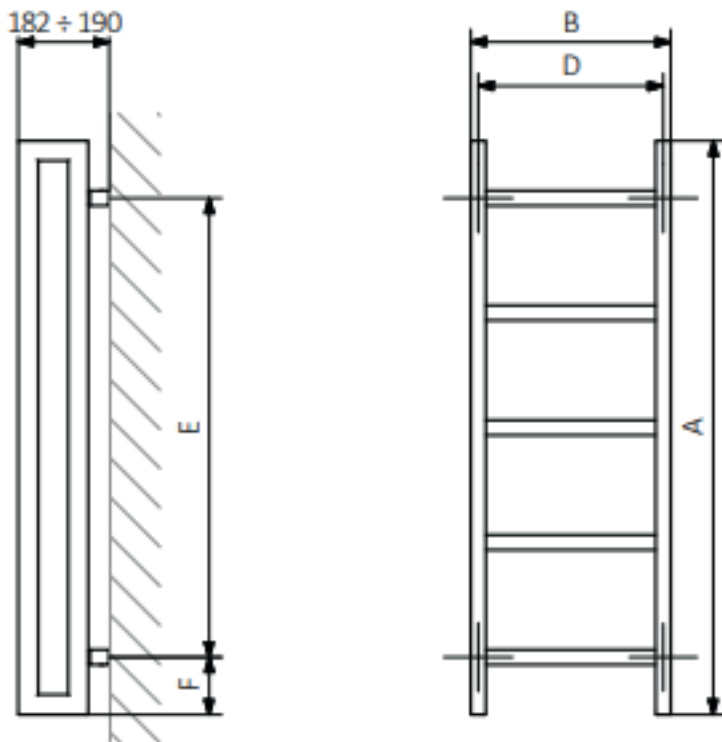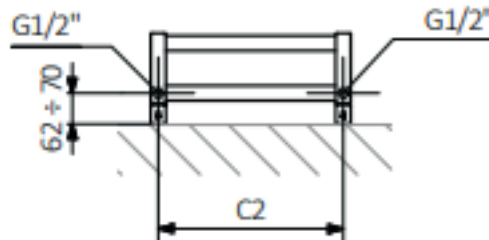

A - Höhe B - Breite C1-C5 - Anschlussabstand D - horizontaler Wandhalterungsabstand E - Vertikaler Wandhalterungsabstand
F - Abstand von der Achse der unteren Wandhalterung bis Unterkante des Kollektors

Kollektor:



Rohr:

